

MICRO SWITCH

FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

BZ-2RW855-S

BZ-2RW855-S

PAGE 1 OF 1

M

DRAWING
NUMBER

7

ISSUE

REPLACES

RELEASE NO. PR-6725

CHECK

REVISIONS

A	CO 39621	T M M 16 DEC 77
B	CO 58037	SMA 1 OCT 85
C	CO67209	J A P 3 MAY 90
D	CO- 77591	DAW 22 JUN 94
E	CO93346	DLT 14 SEP 98
F	CO- 94212-K	DLT 4 NOV 99

CHECK

17 OCT 77


77

10 OCT 77

FORMTEK

FO-52848-A

DRAWN

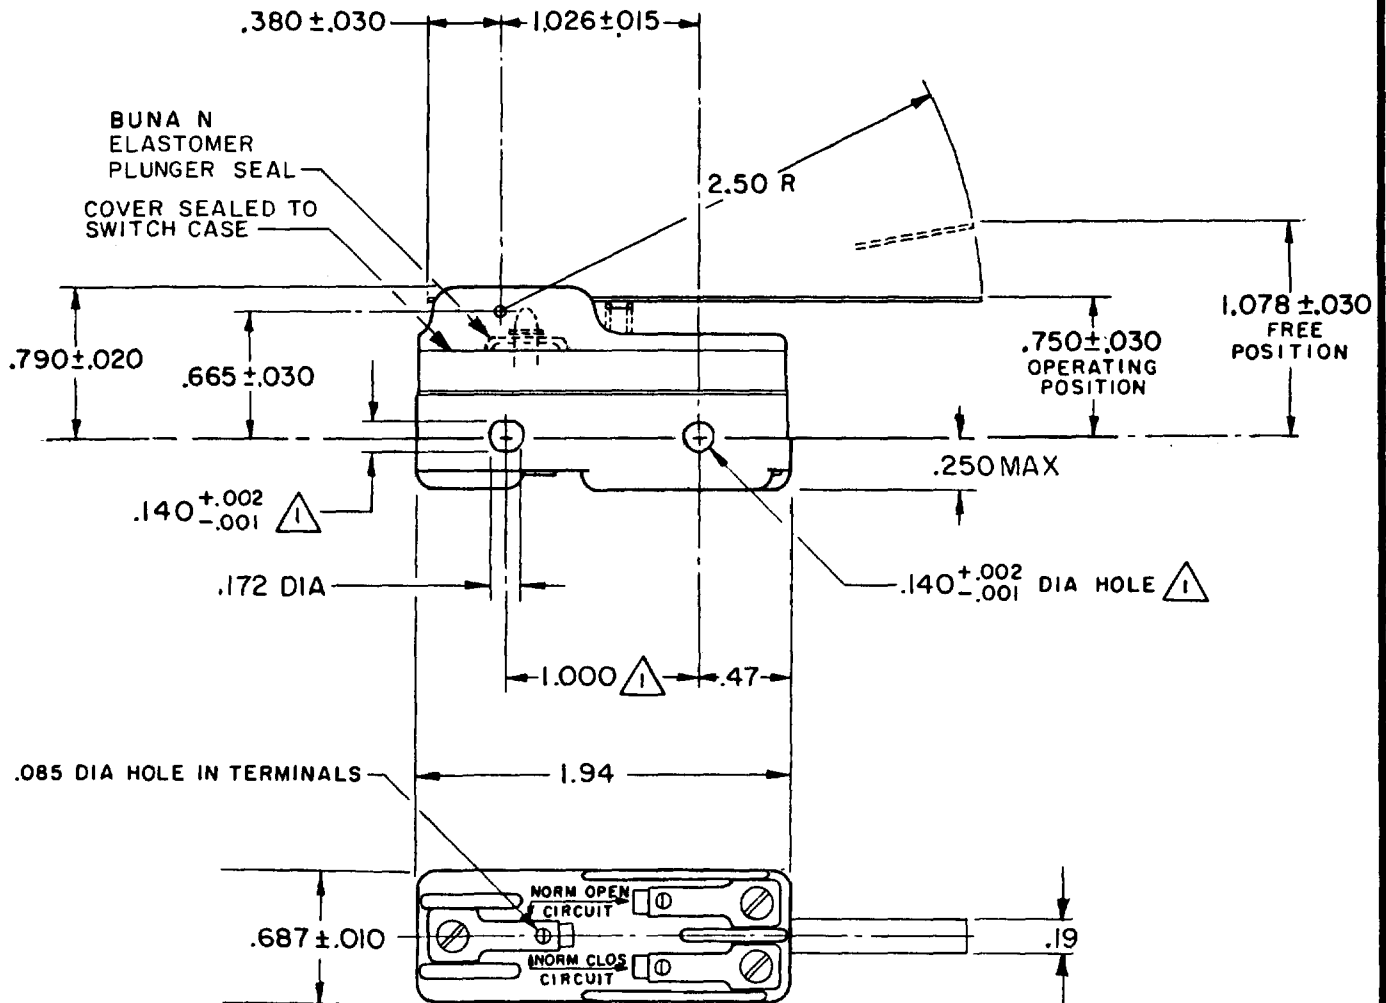


NOTES

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ± .002 CENTERS
- 2 - SEALED CONSTRUCTION PROVIDES SPLASH RESISTANCE

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE — 2 1/2 OZ MAX

RELEASE FORCE — — 1/2 OZ MIN

DIFFERENTIAL TRAVEL — .007—.050

OVERTRAVEL — — — .219 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L96 15A 125, 250 OR 480 VAC
1/8 HP 125 VAC, 1/4 HP 250 VAC
1/2A 125 VDC, 1/4A 250 VDC

L288
L299
L306

CE D RL 16A 250V ~ T85 5E4

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

DIM.	TOL.	DIM.	TOL.
mm	mm/in	in	mm/in
NO PLACES	X	1/4	X X
ONE PLACE	X, X	0.4/016	X X
TWO PLACES	X, XX	0.15/006	X XX
THREE PLACES	X, XXX	0.13/005	X XXX
ANGLES			

DESIGN UNITS ☐ SI METRIC ☐ US CUSTOMARY

WEIGHT .063 LB