

MICRO SWITCH

FREEPORT ILLINOIS, U.S.A

A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

BZ-2RW876T

BZ-2RW876T

PAGE 1 OF 1

REPLACES

RELEASE NO. PR-5268

DRAWING
NUMBER

4

ISSUE

CHECK

REVISIONS

A	CO-69351-D	JWB	18 JUL 91
B	CO-77589	TSM	29 MAR 94
C	CO93346	DLT	14 SEP 98

CHECK

75

20

OCT

75

CHECK

75

OCT

75


75

75

FORMTEK

FO-52848-A

DRAWN

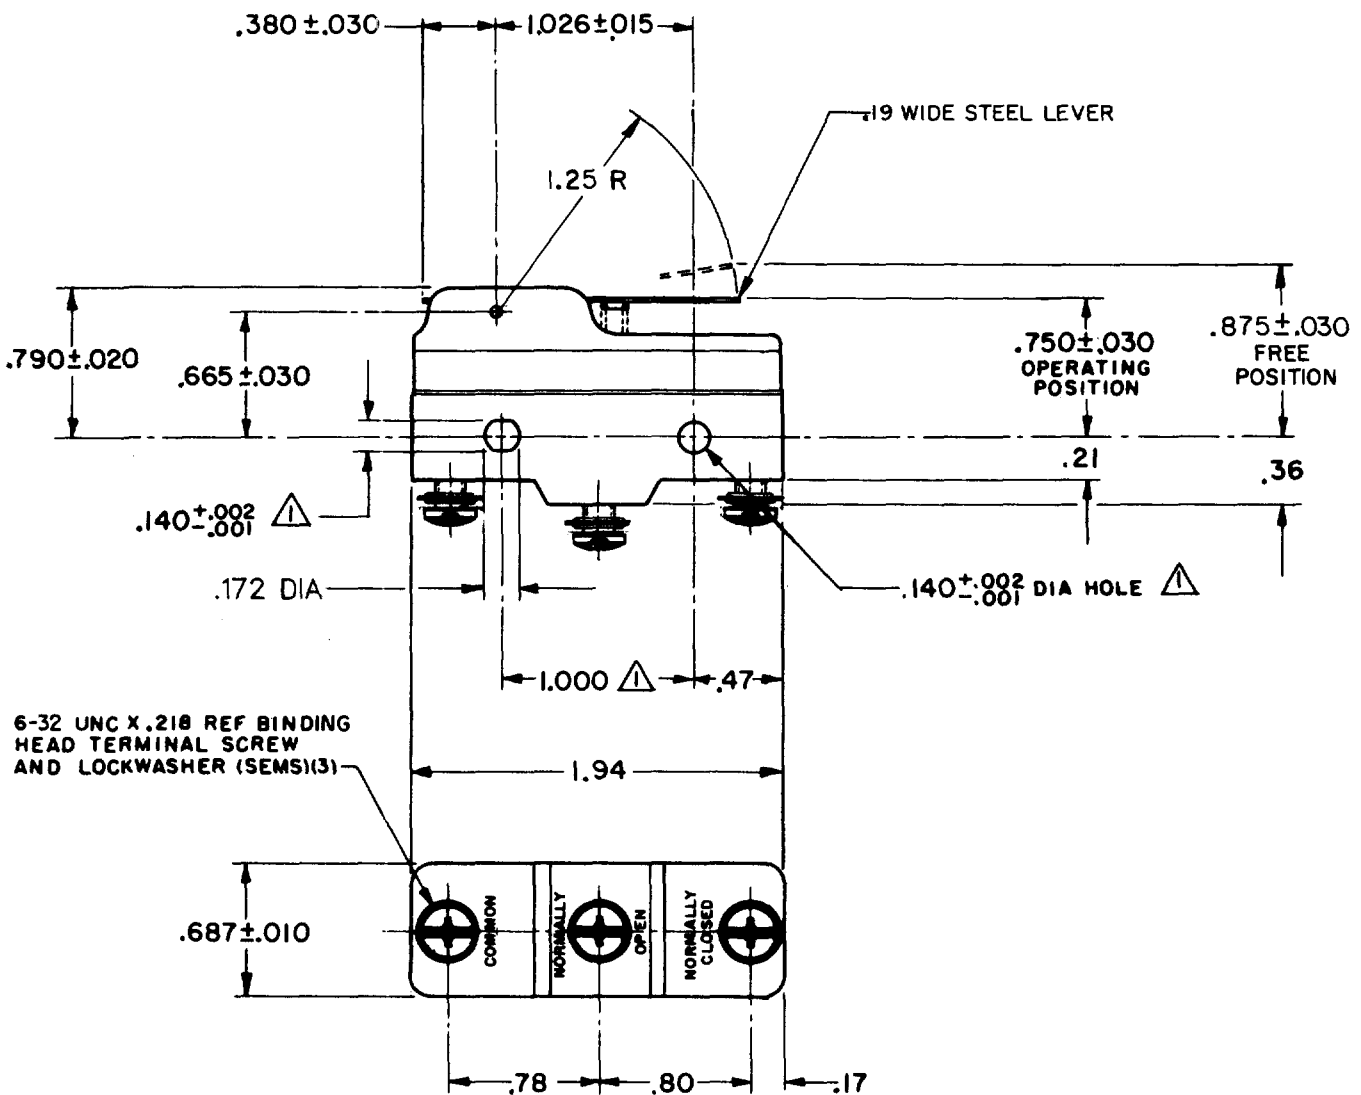


NOTE

△ MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ± .002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE - - - - - 6 OZ MAX

RELEASE FORCE - - - - - 1 1/2 OZ MIN

DIFFERENTIAL TRAVEL - - - .004 - .025

OVERTRAVEL - - - - - .141 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

UL LISTED - FILE E12252
15A-125, 250 OR 480 VAC,
1/8HP-125 VAC; 1/4HP-250 VAC
CODE L 96 1/2A-125 VDC; 1/4A-250 VDC

L288
L299
L306



16A 250V ~ T85 5E4

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

	DIM. mm	TOL. mm/in	DIM. in	TOL. mm/in
NO PLACES	X	1/.04		
ONE PLACE	X,X	0.4/.016	X,X	0.8/.03
TWO PLACES	X,XX	0.15/.006	X,X,X	0.38/.015
THREE PLACES			X,X,X,X	0.13/.005

DESIGN UNITS ☐ SI METRIC ☒ US CUSTOMARY

WEIGHT .073 LB