

CATALOG LISTING
BZ-3AD-PC2

PAGE 1 OF 1

REPLACES

PR-4295-T

CHECK

CHECK


14 APR 99

J A F

CHECK

14 APR 99
J J A


RASTER
DRAWN

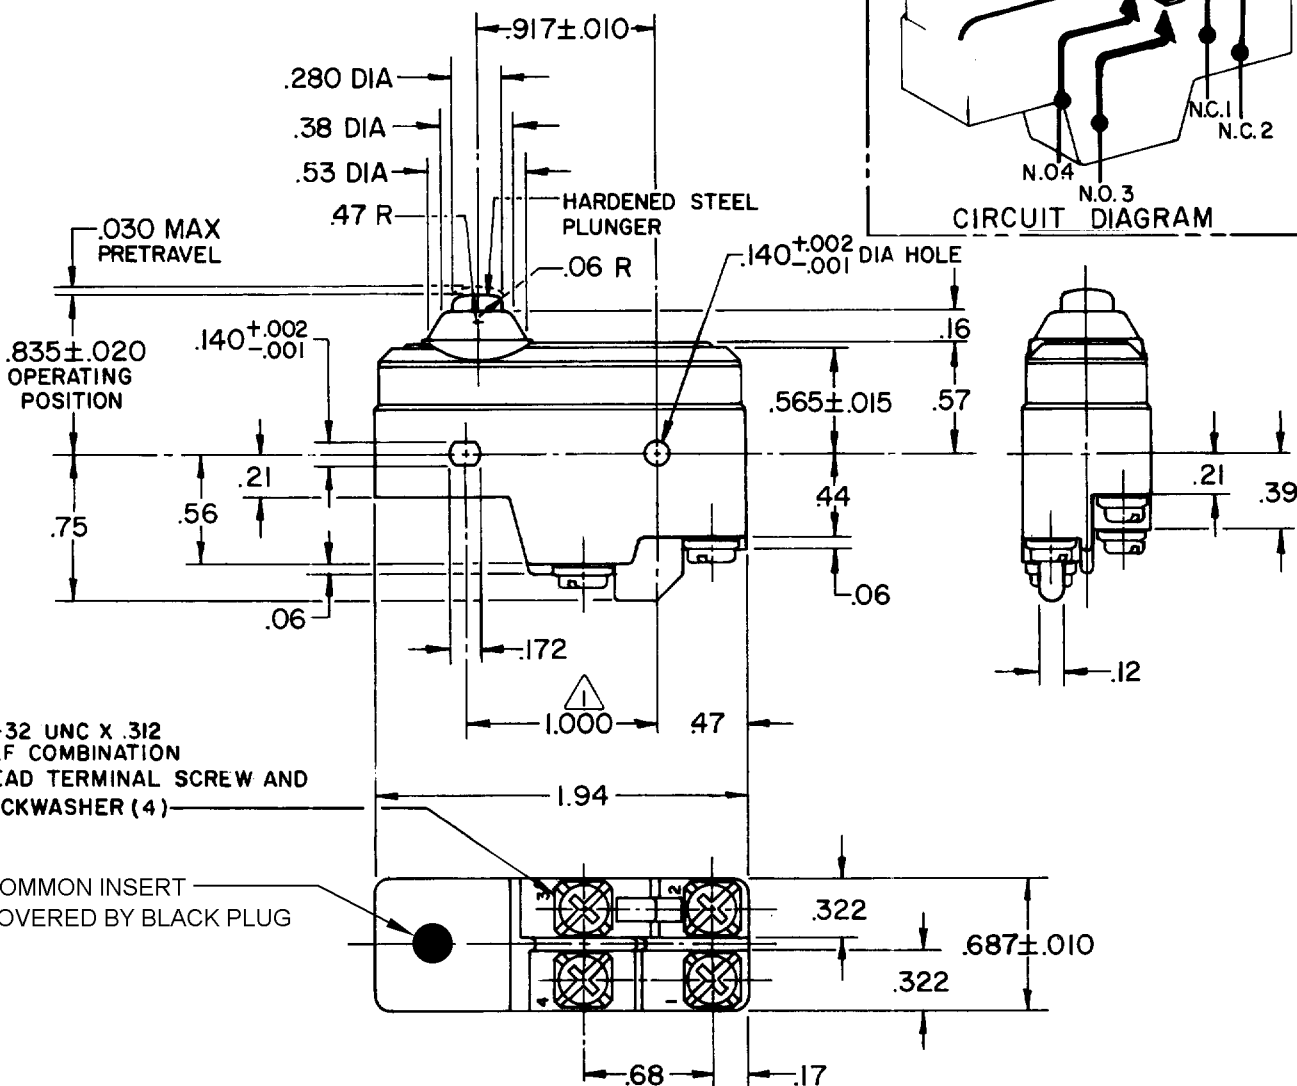

- NOTES -
- MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA. ON 1.000±.002 CENTERS
 - SUITABLE ONLY FOR APPLICATIONS IMPARTING A RAPID STROKE TO THE SWITCH PLUNGER

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS


OPERATING FORCE ----- 16 - 26 OZ
RELEASE FORCE ----- 4 OZ MIN
DIFFERENTIAL TRAVEL ----- .002 - .005
OVERTRAVEL ----- .060 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
SEE CIRCUIT DIAGRAM

15A-125, 250, OR 480 VAC; 2A 600 VAC
CODE 1A-125 VDC; 0.5A-250 VDC
L 180 1/4HP-125 VAC; 1/2HP-250 VAC

② SAME POLARITY AS ③



SCALE FULL

DO NOT
SCALE PRINT

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE

ONE PLACE (.0) ±.030

TWO PLACE (.00) ±.015

THREE PLACE (.000) ±.005

ANGLES ±

WEIGHT

