

MICRO SWITCH
a Honeywell Division

FED.MFG.CODE 91929

SWITCH - BASIC

X69117-BZ

BZ-3AW805551T

4
ISSUE

CATALOG LISTING

REPLACES

PR-8055

RELEASE NC

УЧЕБНИК

SECRET

১১১

MAF

L

7

U
H
C



১৫

25

ARJ

FORMTEX

DRAWN

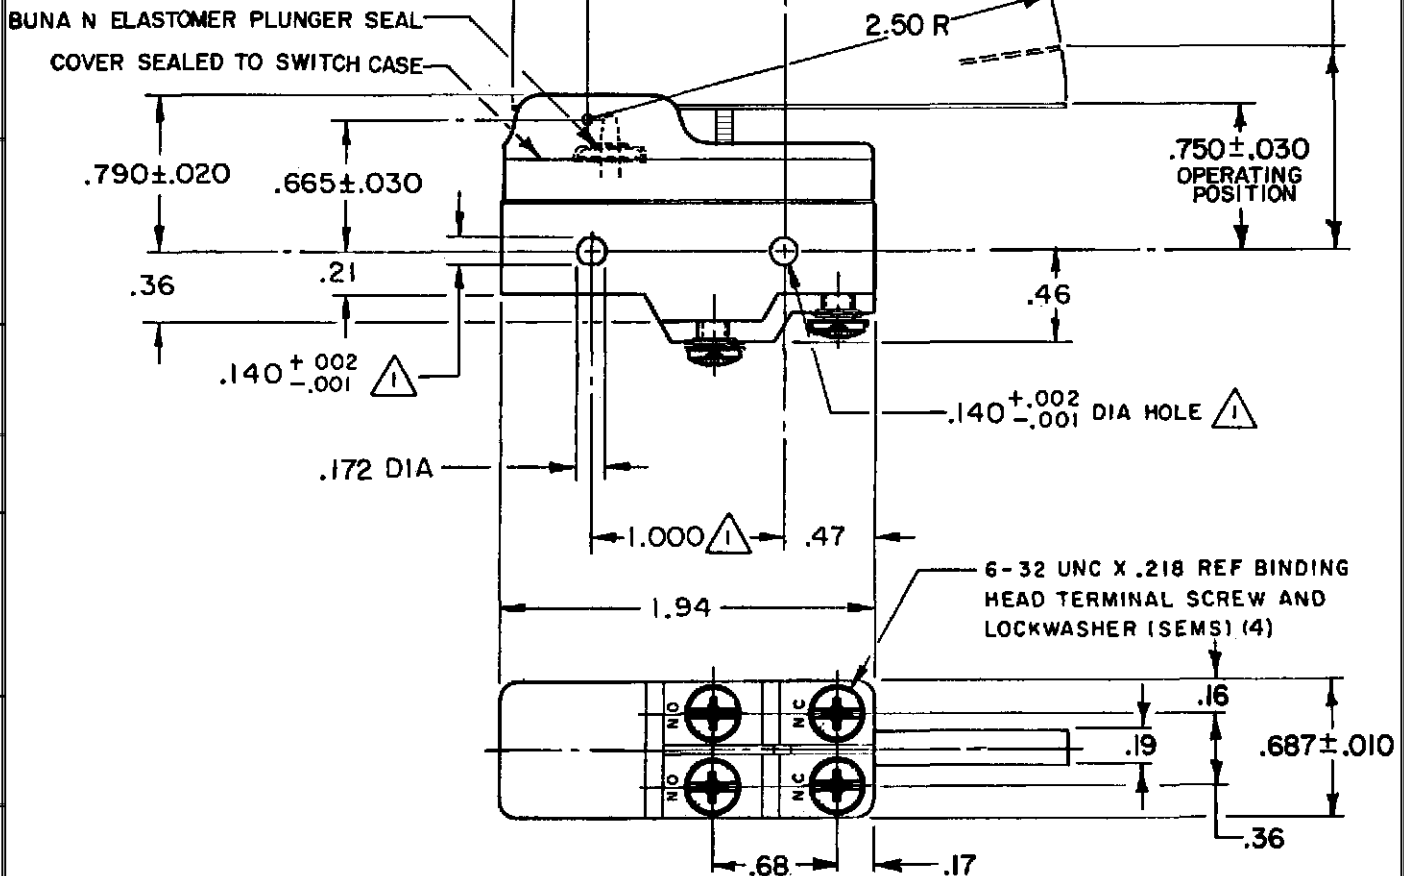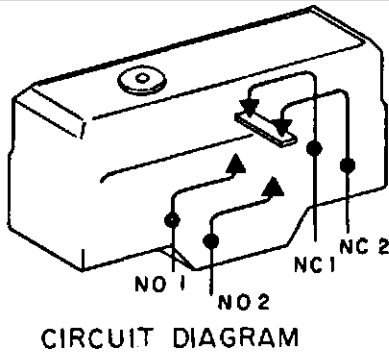


NOTE -



- MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON $1.000 \pm .002$ CENTERS
SUITABLE ONLY FOR APPLICATIONS IMPARTING A RAPID STROKE TO THE SWITCH PLUNGER
SEALED CONSTRUCTION PROVIDES SPLASH RESISTANCE

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE - - - - 3 1/4 OZ MAX	CONTACT ARRANGEMENT (SEE CIRCUIT DIAGRAM)	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
RELEASE FORCE - - - - - 1/2 OZ MIN	L73 15A 125, <u>250</u> OR 480 VAC 1A 125 VDC, 0.5A 250 VDC 1/4HP 125 VAC, 1/2HP <u>250</u> VAC	ONE PLACE (.0) ±.030	
DIFFERENTIAL TRAVEL - - - - - .020-.100		TWO PLACE (.00) ±.015	
OVERTRAVEL - - - - - .219 MIN		THREE PLACE (.000) ±.005	
		ANGLES ±	
		WEIGHT	