

**MICRO SWITCH**  
a Honeywell Division

FED.MFG.CODE 91929

# SWITCH - BASIC

CATALOG LISTING



2

ENDS

## REVISIONS

|   |         |
|---|---------|
| A | C093346 |
|---|---------|

DLT  
18 SEP 98

|  |  |
|--|--|
|  |  |
|--|--|

|  |  |
|--|--|
|  |  |
|--|--|

|  |  |
|--|--|
|  |  |
|  |  |

|  |  |
|--|--|
|  |  |
|  |  |

|  |  |
|--|--|
|  |  |
|--|--|

|  |  |
|--|--|
|  |  |
|--|--|

|  |  |
|--|--|
|  |  |
|--|--|

|  |  |
|--|--|
|  |  |
|--|--|

|  |  |
|--|--|
|  |  |
|  |  |

|  |  |
|--|--|
|  |  |
|  |  |

|  |  |
|--|--|
|  |  |
|--|--|

|  |  |
|--|--|
|  |  |
|  |  |

[illegible]

|  |  |  |  |
|--|--|--|--|
|  |  |  |  |
|--|--|--|--|

|  |  |
|--|--|
|  |  |
|--|--|

|  |  |
|--|--|
|  |  |
|--|--|

4

|                                                                                                                                                                                                                                                                                |                   |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|
| <div style="display: flex; align-items: center;"> <div style="width: 20px; height: 20px; background-color: #f0f0f0; margin-right: 5px;"></div> <div> <p>  </p> <p> <b>Y</b> </p> </div> </div> | <p> <b>Y</b> </p> |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|

10



A small schematic diagram showing a corner joint. Two L-shaped components are joined at a right angle. A gasket is shown between the two components, and a bolt is used to secure the joint.

|                      |                      |
|----------------------|----------------------|
| RELEASE NO. PR-21621 | REPLACES X98961 - BZ |
|----------------------|----------------------|

RELEASE NO. PR-21621

|            |
|------------|
| RELEASE NO |
|------------|

CHECK


|       |  |
|-------|--|
| Y     |  |
| CHECK |  |

|      |           |
|------|-----------|
| JALA | 21 APR 95 |
|------|-----------|

HECK

|      |           |
|------|-----------|
| JALA | 21 APR 95 |
|------|-----------|

DRAWN

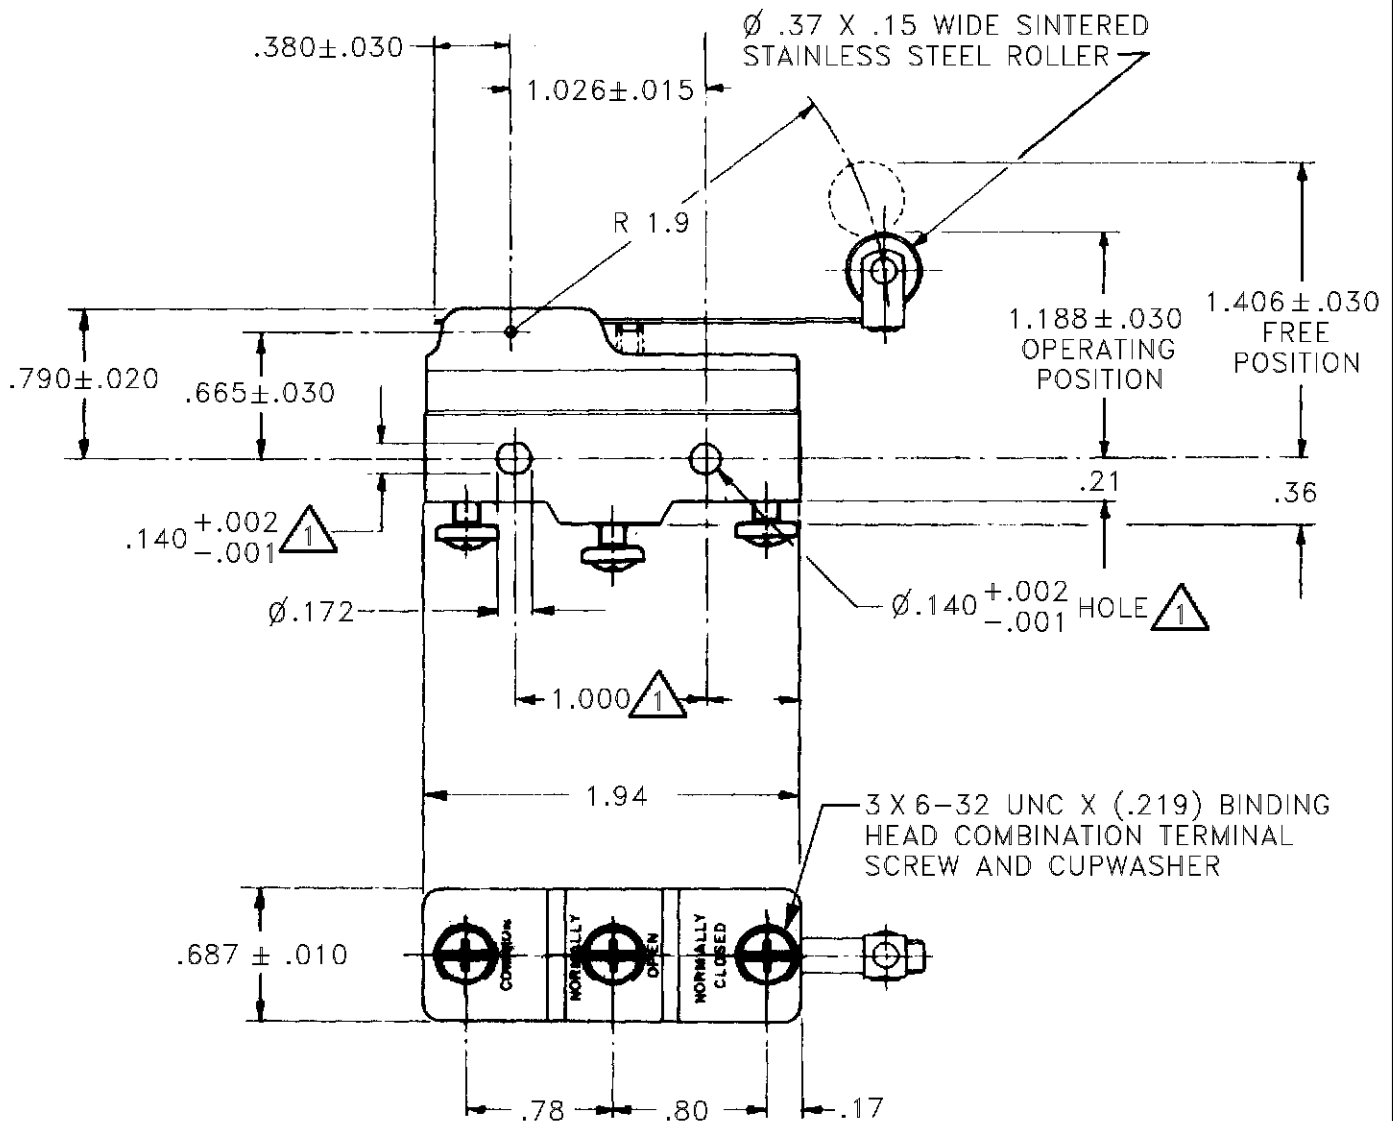


## NOTE

1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS  
OR .139 MAX DIA ON  $1.000 \pm .002$  CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



| CHARACTERISTICS                   | ELECTRICAL DATA                                                                                                                        | SCALE                                        | DO NOT<br>SCALE PRINT |
|-----------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------|-----------------------|
| OPERATING FORCE — — 3 1/2 OZ MAX  | CONTACT ARRANGEMENT<br>S P D T                                                                                                         | UNLESS OTHERWISE SPECIFIED<br>TOLERANCES ARE |                       |
| RELEASE FORCE — — — — 3/4 OZ MIN  | L96<br>15A 125, <u>250</u> OR 480 VAC<br>1/8HP 125 VAC, 1/4HP <u>250</u> VAC<br>1/2A 125 VDC, 1/4A 250 VDC<br><br>L288<br>L299<br>L306 | ONE PLACE ( .0 )                             | ± .030                |
| DIFFERENTIAL TRAVEL — — .035—.068 |                                                                                                                                        | TWO PLACE ( .00 )                            | ± .015                |
| OVERTRAVEL — — — — — .156 MIN     |                                                                                                                                        | THREE PLACE ( .000 )                         | ± .005                |
|                                   |                                                                                                                                        | ANGLES                                       | ±                     |
|                                   |                                                                                                                                        | WEIGHT                                       | .076 LB               |
|                                   | 16A 250V ~ T85 5E4                                                                                                                     |                                              |                       |