

MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91929


SWITCH - BASIC

CATALOG LISTING


BZ-3RW8995516-PC2-S

WHEN SEARCHING FOR THIS CATALOG LISTING WITHIN HONEYWELL'S INTERNAL SAP SYSTEM, THE LISTING MUST BE ENTERED WITHOUT DASHES (BZ3RW8995516PC2S) DUE TO CHARACTER LIMITATIONS IMPOSED BY THE SYSTEM.

MOLDED NUT WITH SELF
LOCKING 6-32 UNC THREAD
X .250 LONG ADJUSTING
SCREW WITH .062 HEX SOCKET

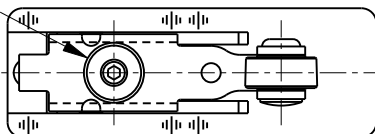

AQG7260

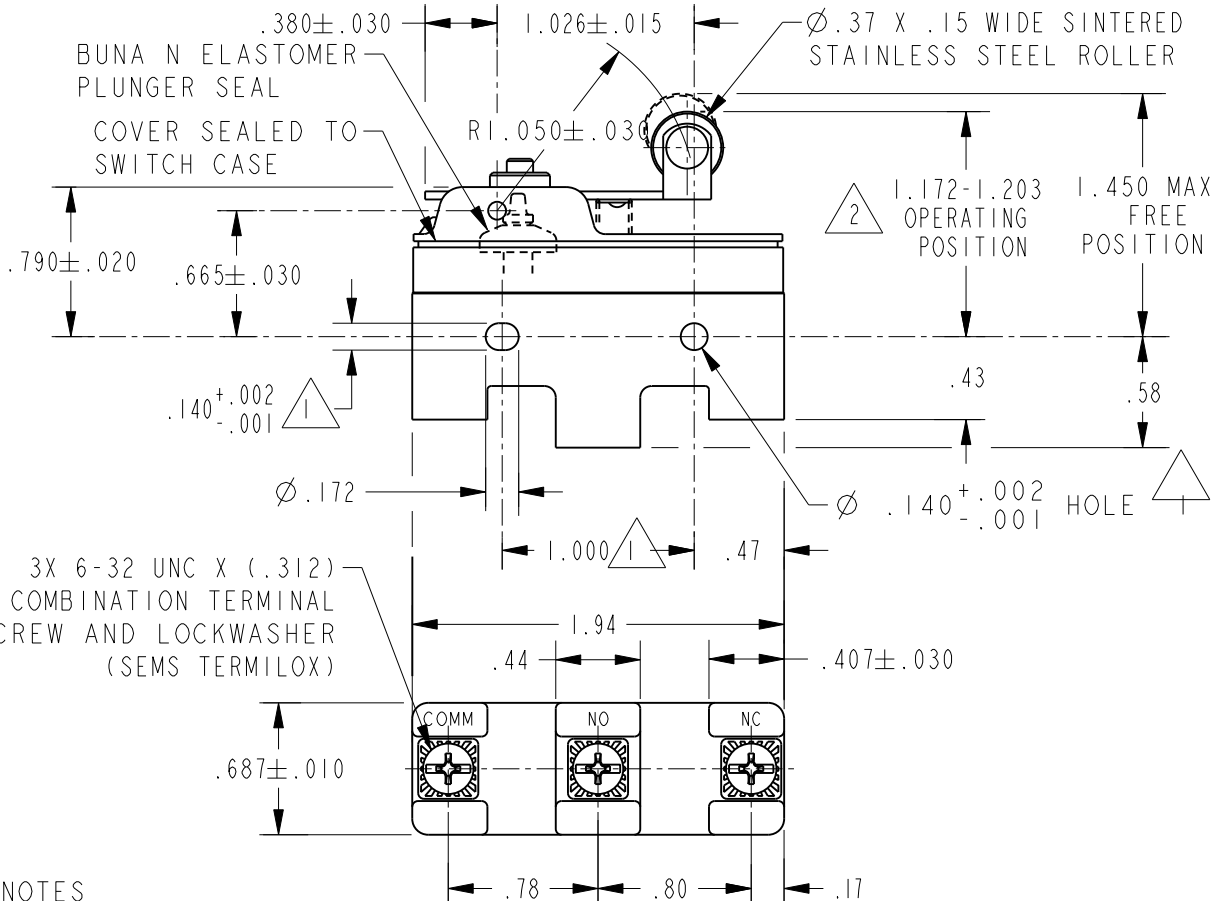


NOTES

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF Ø.139 MAX ON 1.000±.002 CENTERS
 - 2 ADJUSTING SCREW PERMITS ADJUSTMENT OF OPERATING POSITION THROUGH RANGE INDICATED
 - 3 - DO NOT OVERTRAVEL MORE THAN .145 FROM ANY OPERATING POSITION TO PROVIDE OPTIMUM MECHANICAL LIFE
 - 4 - SEALED CONSTRUCTION PROVIDES SPLASH RESISTANCE
- ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

ELECTRICAL DATA

SCALE NONE DO NOT SCALE PRINT

CONTACT ARRANGEMENT
S P D T

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±
WEIGHT	.076 LB	

L96
15A 125, 250 OR 480 VAC
1/8HP 125 VAC, 1/4HP 250 VAC
1/2A 125 VDC, 1/4A 250 VDC

L288
L306
L315



16A 250V ~ T85 5E4

CATALOG LISTING
BZ-3RW8995516-PC2-S

PAGE 1 OF 1



ISSUE
12

REVISIONS

A	CO95815C	TSM	7MAR00
B	0015138	SPK	29 AUG 05
C	0046794	MBH	09DEC08

REPLACES X77891-BZ
RELEASE NO. PR-12978
09DEC08
RS
CHECK
7MAR00
SAV
CHECK
7MAR00
TSM

PTC/CAD 2D
DRAWN