

MICRO SWITCH

FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

BZ-3YDT

BZ-3YDT

M

DRAWING
NUMBER

15

ISSUE

15

REPLACES

RELEASE NO.

CHECK

CHECK

74

5

AUG

74

D

JUL

74

CHECK

74

K

P


K30

JUL

74

DRAWN

FO-52848-A

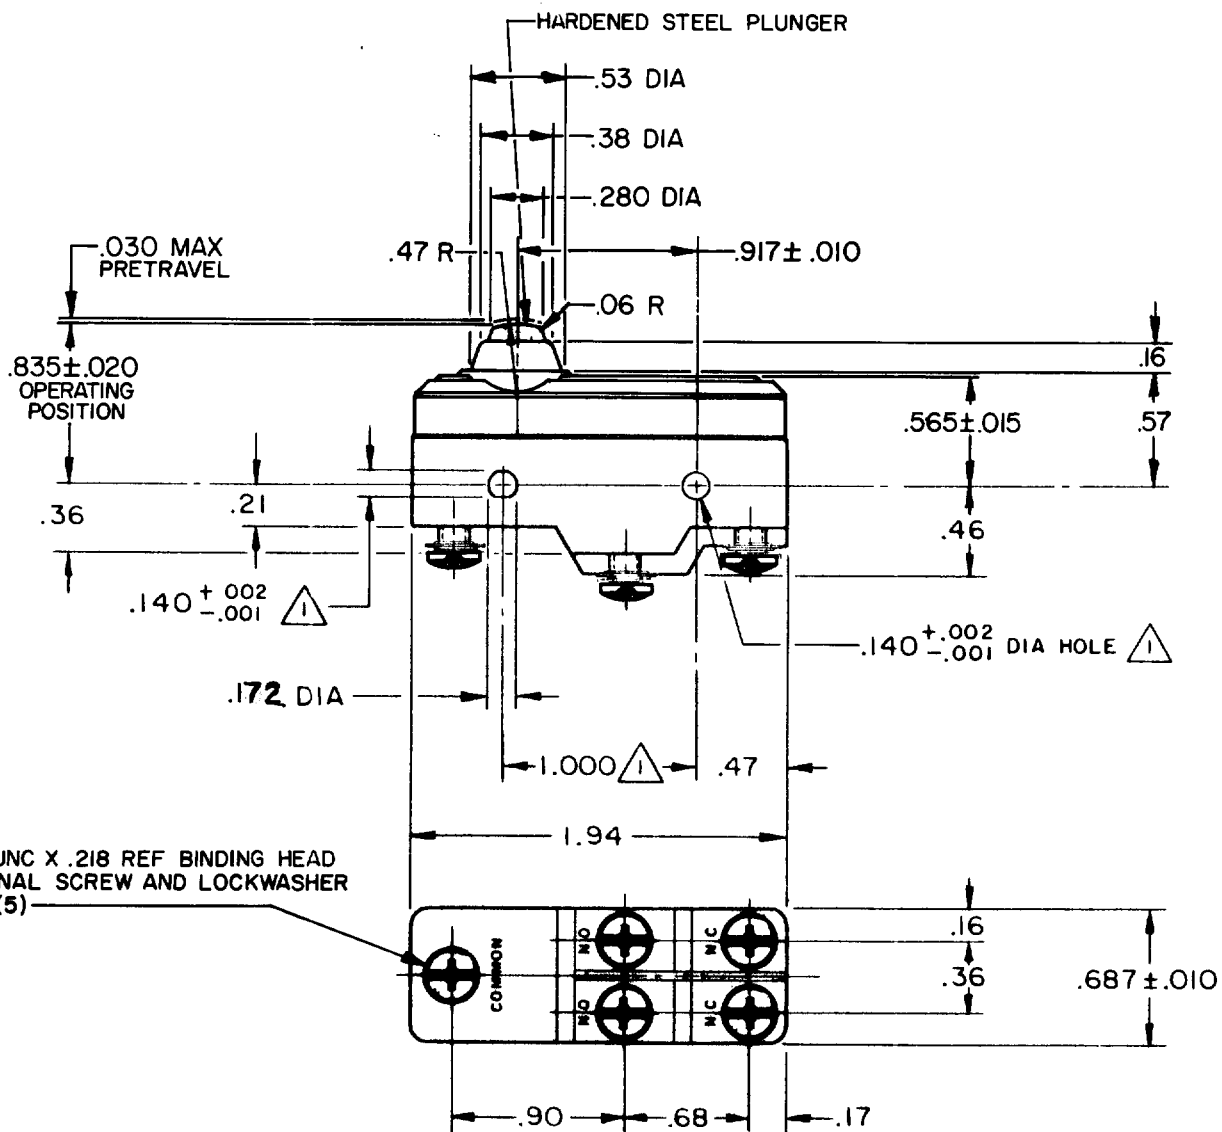

6-32 UNC X .218 REF BINDING HEAD
TERMINAL SCREW AND LOCKWASHER
SEMS (5)


NOTE -



MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX DIA ON 1.000 ± .002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE ----- 16-26 OZ

RELEASE FORCE ----- 4 OZ MIN

DIFFERENTIAL TRAVEL ----- .001-.006

OVERTRAVEL ----- .062 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
SINGLE POLE-DOUBLE THROW-SPLIT CONTACT

UL LISTED - FILE E12252
CODE L4 5A - 250 VAC



SCALE FULL

DO NOT SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR
REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

DIM.	TOL.	DIM.	TOL.
mm	mm/in	in	mm/in
NO PLACES	X	1/.04	
ONE PLACE	X, X	0.4/.015	X, X
TWO PLACES	X, XX	0.15/.006	X, XX
THREE PLACES	X, XXX		X, XXX
ANGLES			

DESIGN UNITS ☐ SI METRIC

☒ US CUSTOMARY

WEIGHT