

MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY

FED. MFR. CODE 91929

SWITCH-BASIC

CATALOG LISTING

BZ-3YQ68T

5

(M) BZ-3YQ68T

ISSUE 5

REPLACES

RELEASE NO.

CNT 1 JUL 55

CHECK

29 JUN 55

LAB

20 JUL 52

REINST

CO 71605

DLT

12 JUL 54

CO-

82497-D

DLT

29 MAR 56

CHECK

13, JUNE 55

D.A.W.

BZ-3YQ68T

M

DRAWING NUMBER


ISSUE

11

11

REVISIONS

A	C.Q.8520
	D. A. W.
	13, JUNE 55
B	CO-34304
	J. A. L.
	11, FEB 70
C	CO-89351-D
	JWB
	16 JUL 91
D	ONS DWG
	CO 71605
	CSL
	20 JUL 92
E	REINST
	CO 71605
	DLT
	12 JUL 94
F	CO-
	82497-D
	DLT
	29 MAR 96

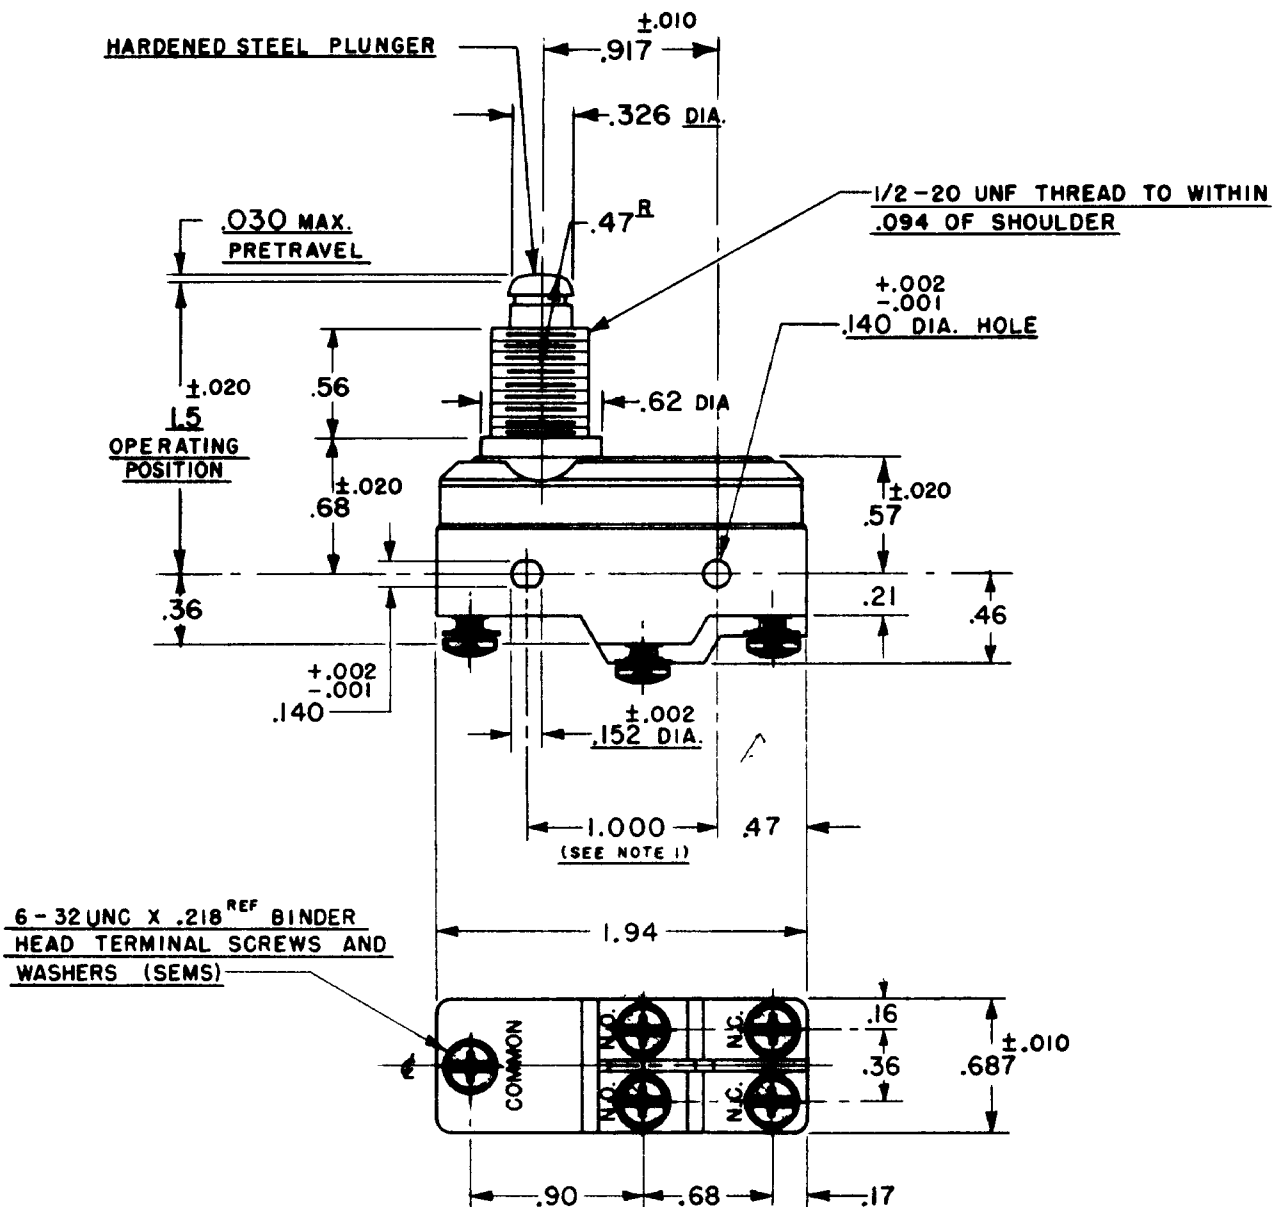

6 - 32UNC X .218^{REF} BINDER
HEAD TERMINAL SCREWS AND
WASHERS (SEMS)

NOTE -

- 1- MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX. DIA. ON 1.000 ±.002 CENTERS.
- 2- HARDWARE FURNISHED UNASSEMBLED

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE-----16-26 OZ.

RELEASE FORCE-----4 OZ. MIN

DIFFERENTIAL TRAVEL-----.001-.004

OVERTRAVEL-----.219 MIN.

ELECTRICAL DATA

CONTACT ARRANGEMENT
SINGLE POLE DOUBLE THROW
SPLIT CONTACT

L4 5A 250 VAC

SCALE-----FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
ONE PLACE (.0) ±.030
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.005
ANGLES ±

WEIGHT----- .088 LB.

W C