

MICRO SWITCH

FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

BZ-7R35-A4

BZ-7R35-A4

CATALOG LISTING

PAGE 1 OF 1

M

ISSUE 5

REPLACES

RELEASE NO. PR-14201

CHECK

REVISIONS

A	CO 38594
B	GI 3 APR 86
C	CO- 73287-6
D	JAL 20 OCT 93
E	CO- 77588
F	KDR 29 MAR 94
G	CO84951A
H	JAK 1 DEC 97

CHECK

1 OCT 85


85 CHECK CEC

1 OCT 85

FORMTEK

DRAWN

TSK

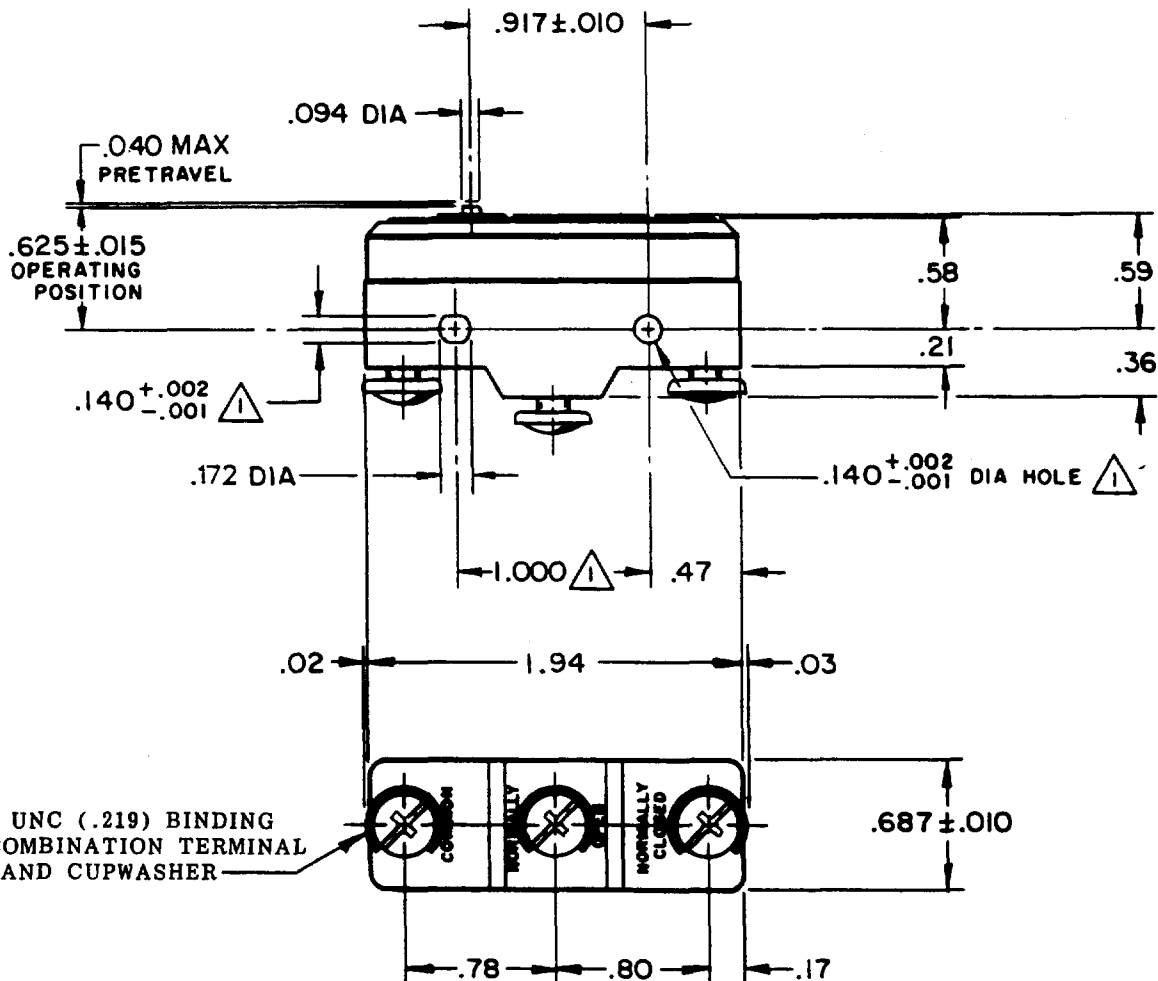


NOTE



MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX DIA ON 1.000 ± .002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE ----- 9-13 OZ
RELEASE FORCE ----- 4 OZ MIN
DIFFERENTIAL TRAVEL ----- .002-.004
OVERTRAVEL ----- .005 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L95
10A 125, 250 OR 480 VAC
1/8HP 125 VAC, 1/4HP 250 VAC

FIG. 95



SCALE FULL

DO NOT SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE 2

	DES. mm	TOL. mm/in	DES. in	TOL. mm/in
NO PLACES	X	1/64	X	0.0150
ONE PLACE	X,X	0.4/010	X,X	0.007515
TWO PLACES	X,XX	0.16/005	X,XX	0.0037515
THREE PLACES	X,XXX		X,XXX	0.00187505
ANGLES				

DESIGN UNITS ☐ SI METRIC ☐ US CUSTOMARY

WEIGHT .063 LB