

**MICRO SWITCH**FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH-BASICCATALOG LISTING
BZ-7RSTCATALOG LISTING
BZ-7RST
PAGE 1 OF 1**M**ISSUE
14

REVISIONS

A	CO 14710	VDF	13 SEP 63
B	CO 44156	T M M	20 APR 78
C	CO 69351-D	JWB	18 JUL 91
D	CO 77589	K D R	29 MAR 94
E	CO 93346	DLT	11 SEP 98
F	205262	CSL	1 APR 02
G	0000441	CSL	2 JUN 03

REPLACES

RELEASE NO.

CHECK

CHECK


26 SEP 63

DRAWN

V.D.F. 13 SEP 63

RASTER

FO-50378

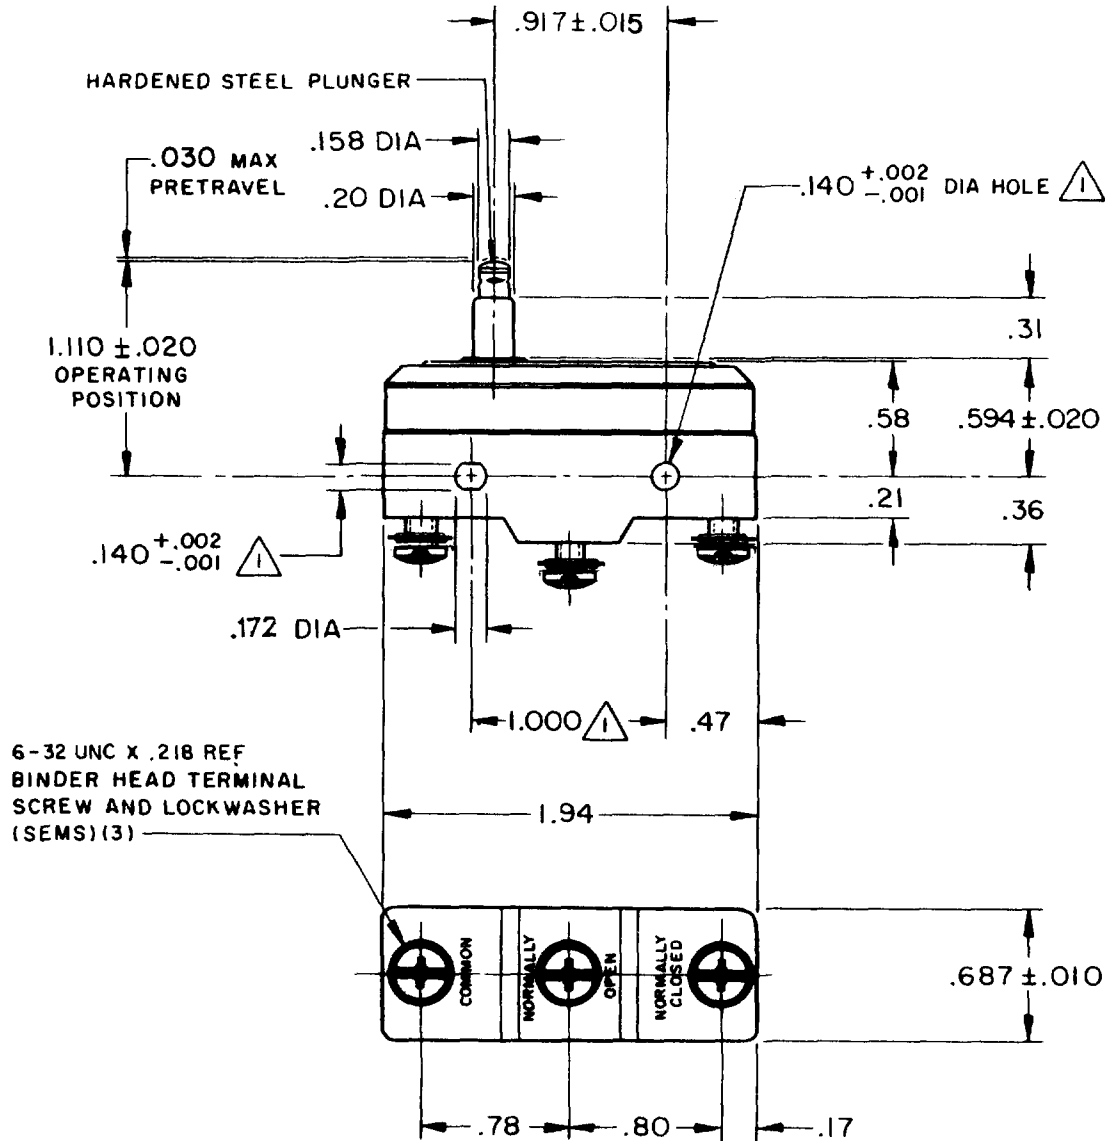

NOTES

MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX DIA ON 1.000 ± .002 CENTERS

2

SWITCH WILL PERFORM SATISFACTORILY IN TEMPERATURE TO MINUS 65°F

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE ——— 22-28 OZ	CONTACT ARRANGEMENT S P D T	DO NOT SCALE PRINT
RELEASE FORCE ——— 4 OZ MIN	UL LISTED-FILE E12252 CODE L96 15A-125, 250 OR 480 VAC 1/8 HP-125 VAC; 1/4 HP-250 VAC 1/2 A-125 VDC; 1/4 A-250 VDC	UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES TOLERANCES ARE:
DIFFERENTIAL TRAVEL ——.0025-.0050	L288 L299 L306	ONE PLACE (.0) ±.030 TWO PLACE (.00) ±.015 THREE PLACE (.000) ±.005 ANGLES ±
OVERTRAVEL ——— .060 MIN	CE D SP 16A 250V ~ T85 5E4	WEIGHT .063 LB