

MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
MINNEAPOLIS, MINN 55402

FED. MFR. CODE 91929

SWITCH - BASIC

CATALOG LISTING
BZ-7RW822-A2

AQK1000

BZ-7RW822-A2

PAGE 1 OF 1

DRAWING NUMBER

ISSUE 10

REPLACES

RELEASE NO.

CHECK

REVISIONS


A	CO	16736	6 CH	5 APRIL 82
B	CO	34308	D J W	15 JUL 79
C	CO	70184-6	G J W	16 MAR 92
D	CO	73287-J	J A L	22 NOV 93
E	CO	75204-B	W L S	1 FEB 94
F	CO	77589	T S M	29 MAR 94
G	CO	93346	D L T	20 SEP 98
H	CO	0017585	L K M	20 FEB 06

CHECK

DRAWN

FORMTEK

0-30378

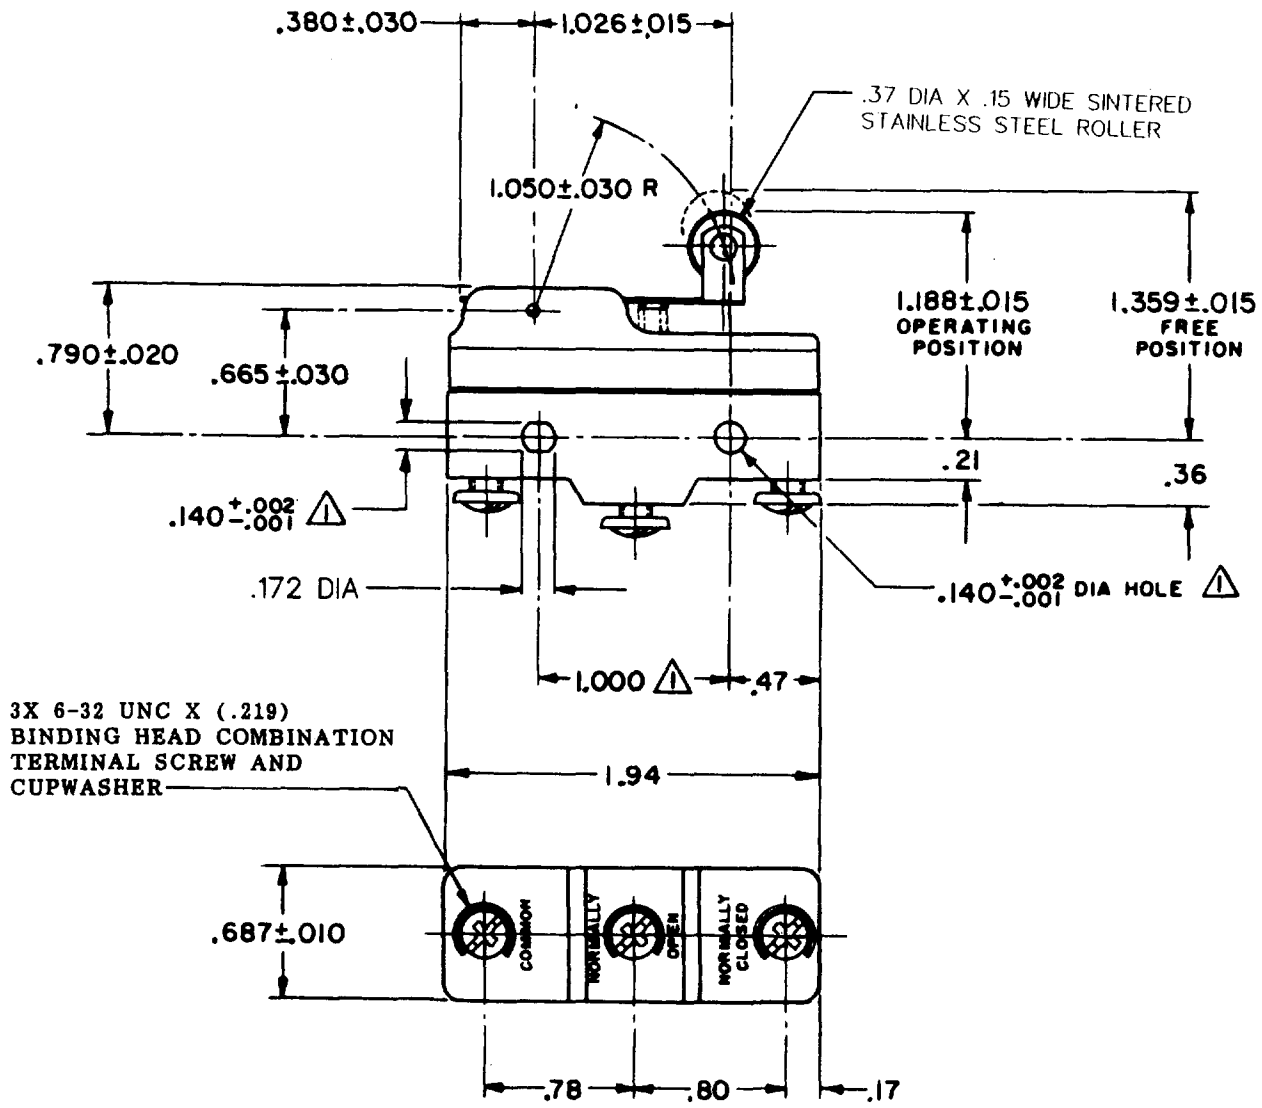

NOTE
 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000±.002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE ----- 7 OZ MAX	CONTACT ARRANGEMENT S P D T	DO NOT SCALE PRINT
RELEASE FORCE ----- 1 1/2 OZ MIN		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
DIFFERENTIAL TRAVEL ----- .020-.050		TOLERANCES ARE:
OVERTRAVEL ----- .094 MIN		ONE PLACE (.01) ±.000
		TWO PLACE (.00) ±.015
		THREE PLACE (.000) ±.000
		ANGLES ±
		WEIGHT .076 LB

-L96- 15A-125, 250, OR 480 VAC
 1/2 A-125 VDC; 1/4 A-250 VDC
 1/8 HP-125 VAC; 1/4 HP-250 VAC

-L288-
 -L315-
 -L306-
 CE SP 505 RU
 16A 250V ~ T85 5E4