


SWITCH - BASIC

CATALOG | LISTING

BZ-7RW825550512-PC2-S

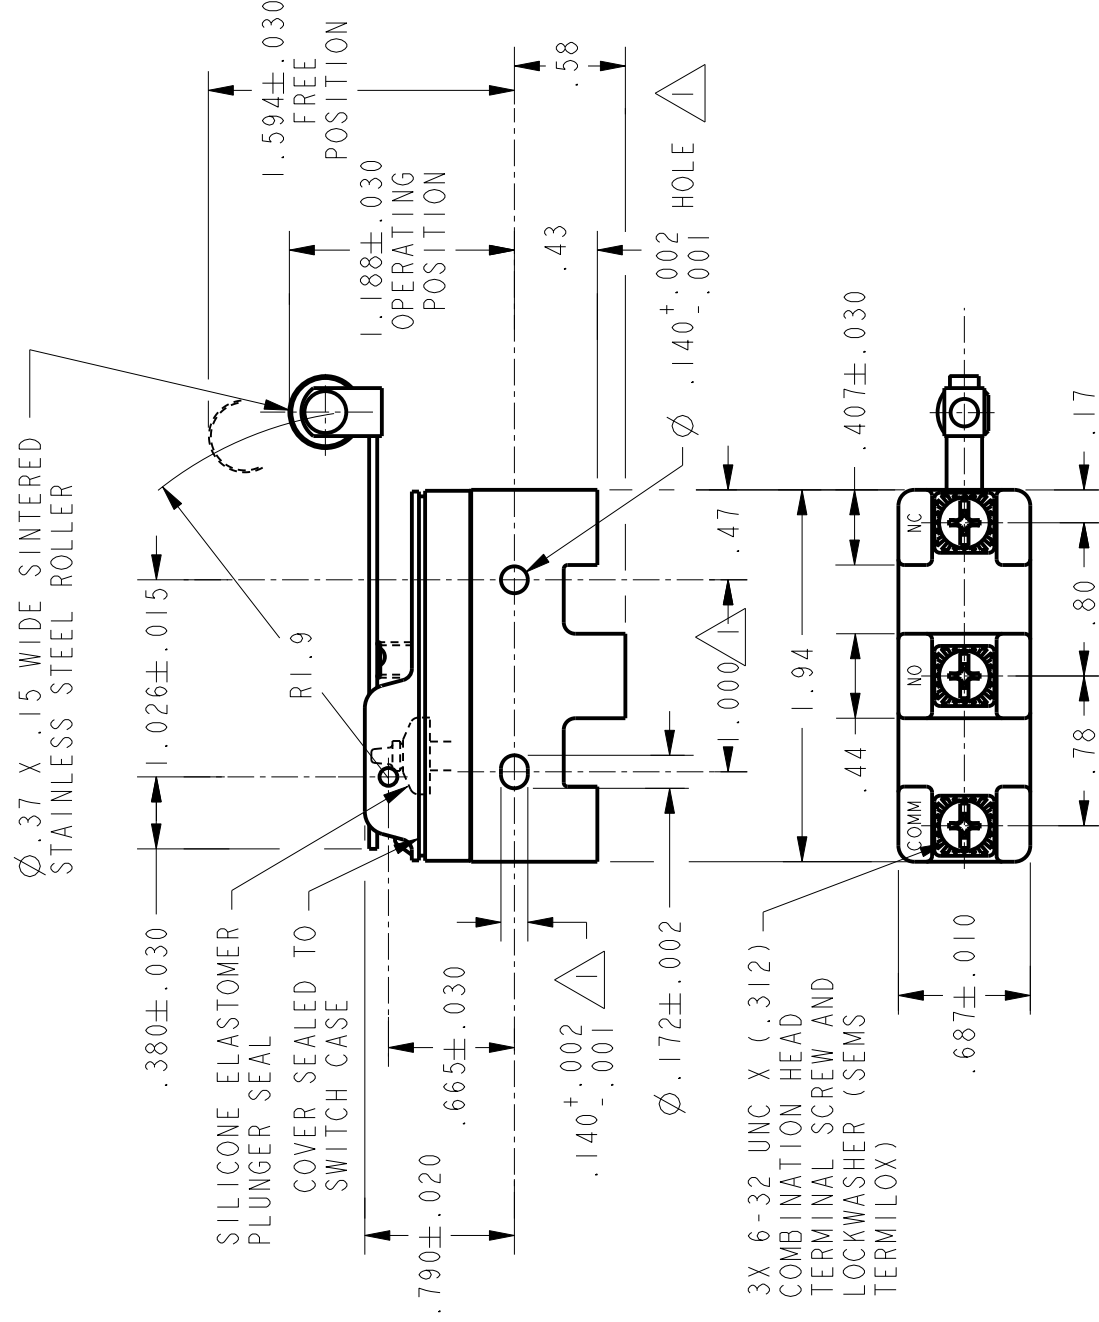

NOTES

2 - SEALED CONSTRUCTION PROVIDES SPLASH RESISTANCE

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		THIRD ANGLE PROJECTION 	
CHARACTERISTICS		ELECTRICAL DATA	
OPERATING FORCE----- 5 OZ MAX RELEASE FORCE----- 3/4 OZ MIN DIFFERENTIAL TRAVEL----- .040-.090 OVERTRAVEL----- .156 MIN		CONTACT ARRANGEMENT S P D T L197 15A 125, <u>250</u> OR 277 VAC 1/8HP 125 VAC, 1/4HP <u>250</u> VAC 1/2A 125 VDC, 1/4A 250 VDC  L288 L299 L306	
SCALE		FULL	
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ONE PLACE (.0) TWO PLACE (.00) THREE PLACE (.000) ANGLES		DO NOT SCALE PRINT ±.030 ±.015 ±.005 +	
WEIGHT		.076 LB	