

MICRO SWITCH
a Honeywell Division


FED.MFG.CODE 91929

SWITCH — BASIC

CATALOG LISTING

BZ-7RW84449-A2


AQL6549

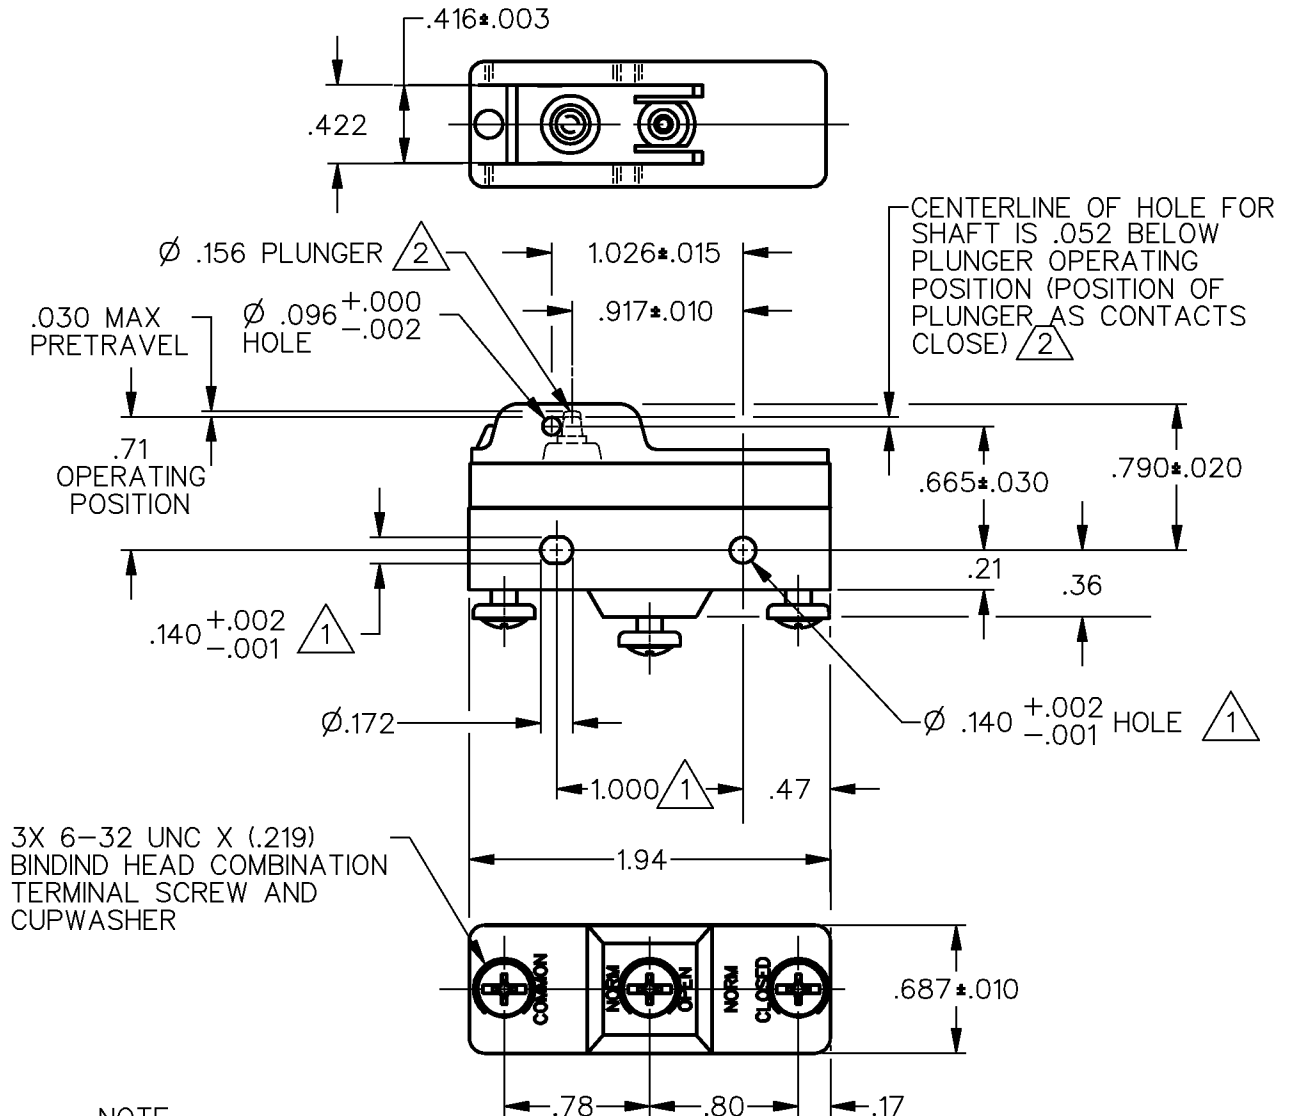

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE — — — 22-28 OZ
RELEASE FORCE — — — 6 OZ MIN
DIFFERENTIAL TRAVEL — — .0025-.0050
DO NOT OVERTRAVEL MORE THAN — .020

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L96

15A 125, 250 OR 480 VAC
1/8HP 125 VAC, 1/4HP 250 VAC
1/2A 125 VDC, 1/4A 250 VDC

L288

L315

L306



16A 250V ~ T85 5E4

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE

ONE PLACE (.0) $\pm .030$ TWO PLACE (.00) $\pm .015$ THREE PLACE (.000) $\pm .005$ ANGLES $\pm$

WEIGHT .070 LB