

# MICRO SWITCH

FREEPORT ILLINOIS, U.S.A  
A DIVISION OF HONEYWELL  
FED. MFG. CODE 91929

## SWITCH - BASIC

CATALOG LISTING

BZ-7RW855T-S

BZ-7RW855T-S

PAGE 1 OF 1

REPLACES

RELEASE NO. PR-6918

DRAWING  
NUMBER

7

ISSUE

CHECK

### REVISIONS

|   |           |       |           |
|---|-----------|-------|-----------|
| A | C045576   | S J B | 5 MAR 79  |
| B | C048454   | J A P | 14 OCT 80 |
| C | C067209   | J A P | 2 MAY 90  |
| D | C069351-D | J W B | 18 JUL 91 |
| E | C077588   | K D R | 29 MAR 94 |
| F | C093346   | DLT   | 23 SEP 98 |

CHECK

77

DEC 77

77


77

77

77

77

77

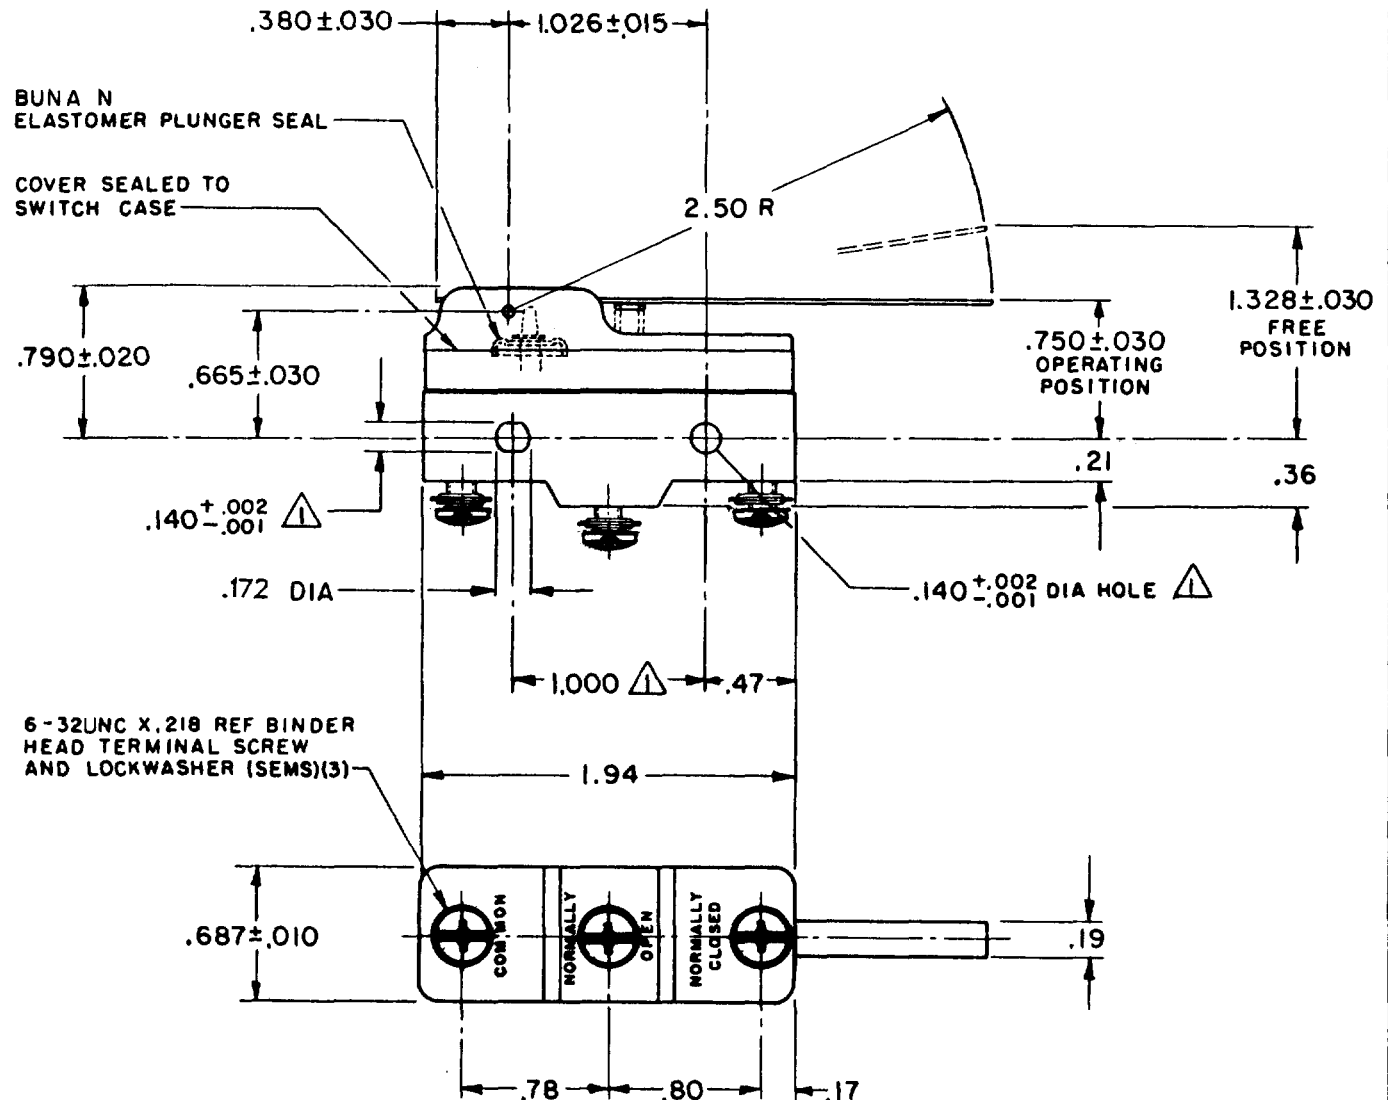

### NOTES

- △ MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000±.002 CENTERS
- 2 - SEALED CONSTRUCTION PROVIDES SPLASH RESISTANCE

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

### CHARACTERISTICS

OPERATING FORCE — 4 OZ MAX  
RELEASE FORCE — 1/2 OZ MIN  
DIFFERENTIAL TRAVEL — .050—.125  
OVERTRAVEL — .219 MIN

### ELECTRICAL DATA

CONTACT ARRANGEMENT  
S P D T

L 197

15A 125, 250, 277 VAC  
1/8 HP 125 VAC; 1/4 HP 250 VAC  
1/2A 125 VDC; 1/4A 250 VDC

L288

L299

L306

CE D A S

16A 250V ~ T85 5E4

### SCALE FULL

DO NOT SCALE PRINT

### TOLERANCES

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

| DIM.         | TOL.  | DIM.     | TOL.  |
|--------------|-------|----------|-------|
| mm           | mm/in | in       | mm/in |
| NO PLACES    | X     | 1/64     |       |
| ONE PLACE    | X,X   | 0.4/016  | X,X   |
| TWO PLACES   | X,XX  | 0.15/006 | X,XX  |
| THREE PLACES | X,XXX |          | X,XXX |
| ANGLES       |       |          |       |

SI METRIC  
DESIGN UNITS ☐

US CUSTOMARY  
☒

WEIGHT .076 LB

FORMTEK

FO-52848-A

DRAWN

T M M 19 DEC 77