

FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91829

CATALOG LISTING

BZ-R173-A4

SWITCH - BASIC

BZ-R173-A4

RELEASE NO. PR - 10332 REPLACES

M

**DRAWING
NUMBER**

2
X

TEST

REVISIONS

A CO-
73287-G
JAL
20 OCT 93

B CO-
77588
KDR
29 MAR 94

CHECK

LUCKY

30

HECK


31

311

AG

FO-52848-A

DRAWN

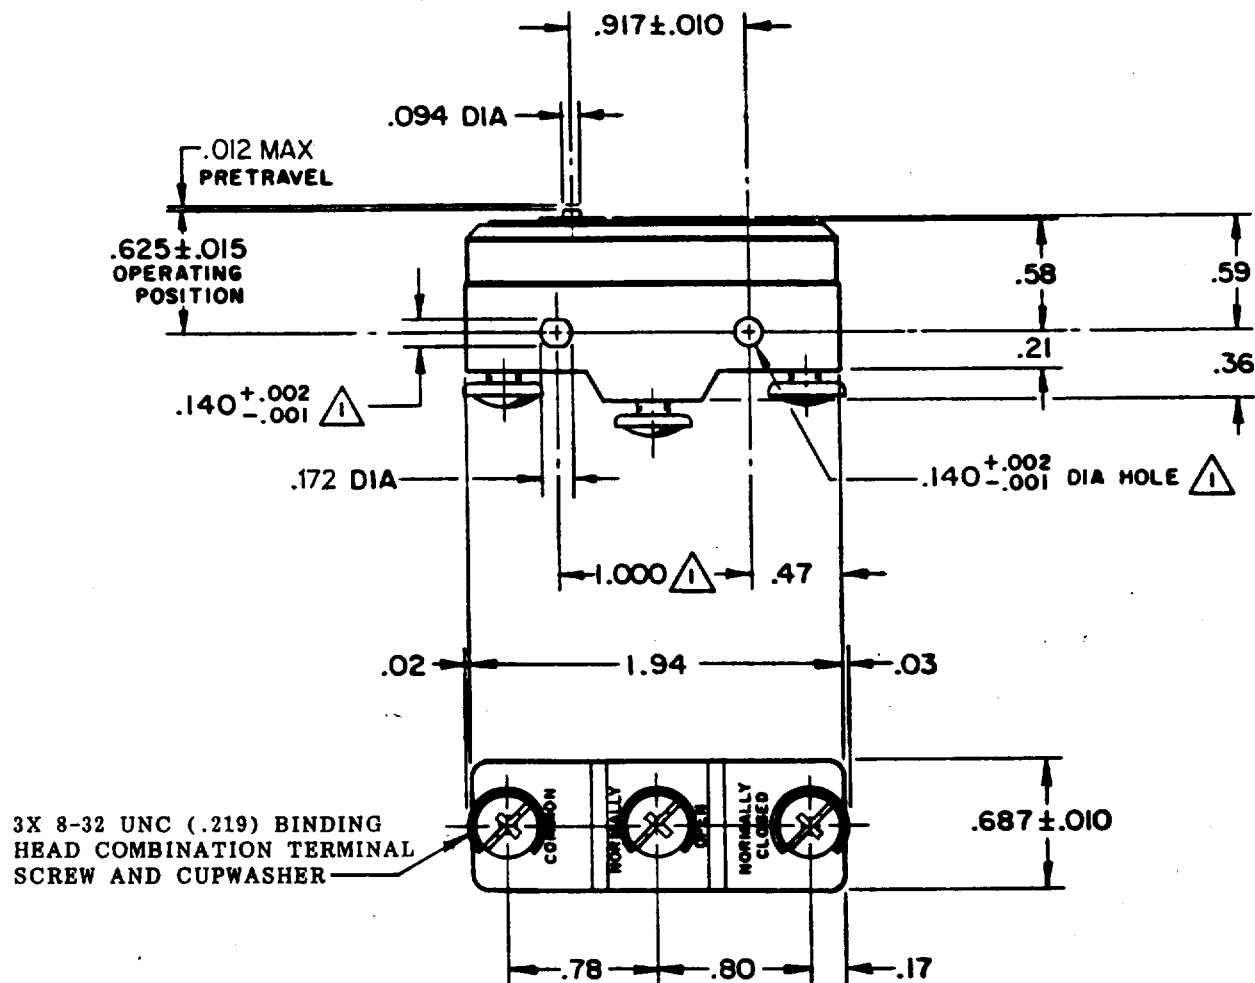


NOTE -



**MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX DIA ON 1.000±.002 CENTERS**

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE ----- 7-10 OZ
DIFFERENTIAL FORCE -- 1/2-1 1/4 OZ

DIFFERENTIAL TRAVEL----.0005 MAX
OVERTRAVEL-----.005 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

UL LISTED - FILE E12252
CODE L111 15A-125, 250 OR 277 VAC
1/8HP-125 VAC; 1/4HP-250 VAC



SCALE FULL

DO NOT SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE $\pm$

	ONE. mm	TOL. mm/In	ONE. to	TOL. mm/In
NO PLACES	X	1.00		
ONE PLACE	X, X	0.41/0.06	X, X	0.04/0.00
TWO PLACES	X, XX	0.16/0.0025	X, X, X	0.020/0.001
THREE PLACES			X, X, X, X	0.007/0.0005

54 MÉTRIC:

DESIGN UNITS

US CUSTOMARY

WEIGHT .074 LB