

**MICRO SWITCH**FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

BZ-R19-A2**BZ-R19-A2****M**DRAWING
NUMBER

X

X

ISSUE

6

REPLACES

RELEASE NO.

CHECK

REVISIONS

A	CO	15200
	JPH	4 FEB 64
B	CO23645	
	ORD	22 JAN 68
C	CO-73287-J	
	JAL	22 NOV 93
D	CO-775RR	
	HAM	29 MAR 94

CHECK

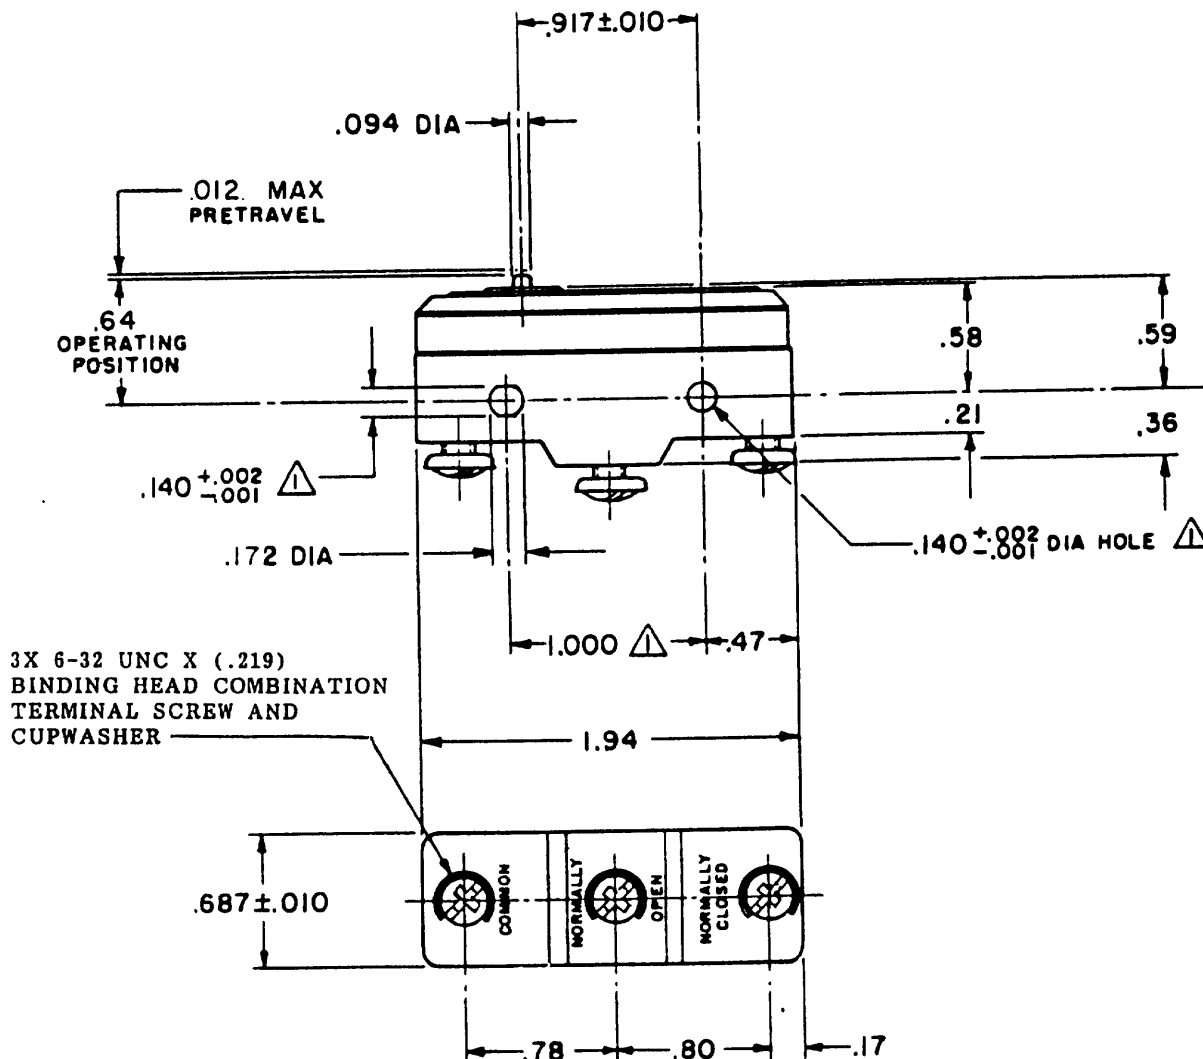
LSD 5 FEB 64

CHECK

JPH 4 FEB '64

DRAWN

FO-80378

**NOTE -**- MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF $.139 \text{ MAX DIA}$ ON $1.000 \pm .002$ CENTERS

- 2 - TO ASSURE THE EXACTING PERFORMANCE FOR WHICH THIS SWITCH IS DESIGNED, THE ELECTRICAL LOAD SHOULD BE LIMITED TO 0.1 AMPS AT 125 VOLTS A-C OR 0.2 AMPS AT 25 VOLTS D.C.

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE ——— 7-12 OZ

RELEASE FORCE ——— 4 OZ. MIN

DIFFERENTIAL TRAVEL ——— .0002-.0008

OVERTRAVEL ——— .005-.008

ELECTRICAL DATACONTACT ARRANGEMENT
S. P. D. T.

— UNDERWRITERS' LAB. INC. LISTED RATING
 -L103- 15 A-125, 250 OR 480 VAC
 1/8 HP-125 VAC; 1/4 HP-250 VAC

**SCALE FULL**

DO NOT SCALE PRINT

UNLESS OTHERWISE NOTED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE (.0) $\pm .030$
 TWO PLACE (.00) $\pm .015$
 THREE PLACE (.000) $\pm .005$
 ANGLES $\pm .005$

WEIGHT .063 LB