

**MICRO SWITCH**FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH-BASICCATALOG LISTING
BZ-R214DRAWING NUMBER
BZ-R214ISSUE
9**M**REPLACES
9

REVISIONS

A	CO15200	RJD	8 FEB 66
B	CO34162	DBW	3 JUL 75
C	CO38509	RER	19 APR 77
D	CO46304	RJH	21 NOV 79
E	CO58037	SWA	1 OCT 85
F	CO78874	DLT	17 NOV 94
G	CO94212-J	JJA	4 OCT 99

FORMTEK
FO-30378

PAGE 1 OF 1

RELEASE NO.

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK


CHECK

CHECK

CHECK

CHECK

CHECK

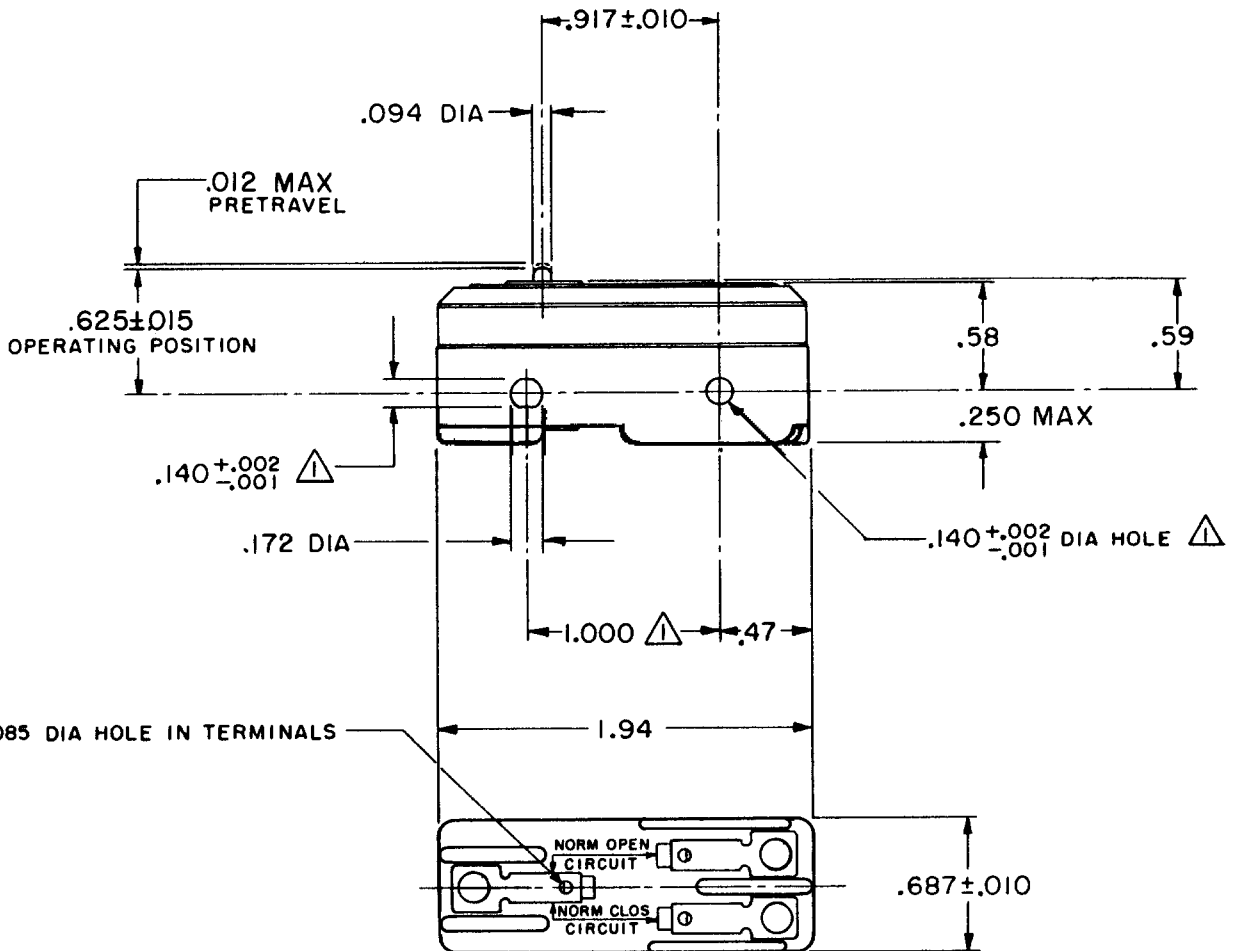

NOTE
△ - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX DIA ON 1.000 ± .002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE-----100 GM MAX

RELEASE FORCE-----71 GM MIN

DIFFERENTIAL TRAVEL-----.00020-.00035

OVERTRAVEL-----.005 MIN

ELECTRICAL DATACONTACT ARRANGEMENT
S P D T

L169

10A 125, 250, 277 VAC
1/8HP 125 VAC, 1/4HP 250 VAC

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
NOTED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT .050 LB