



REVISIONS	
A	CO-94212-E
	DCS 3 SEP 99
B	0033747
	MST 12SEP07

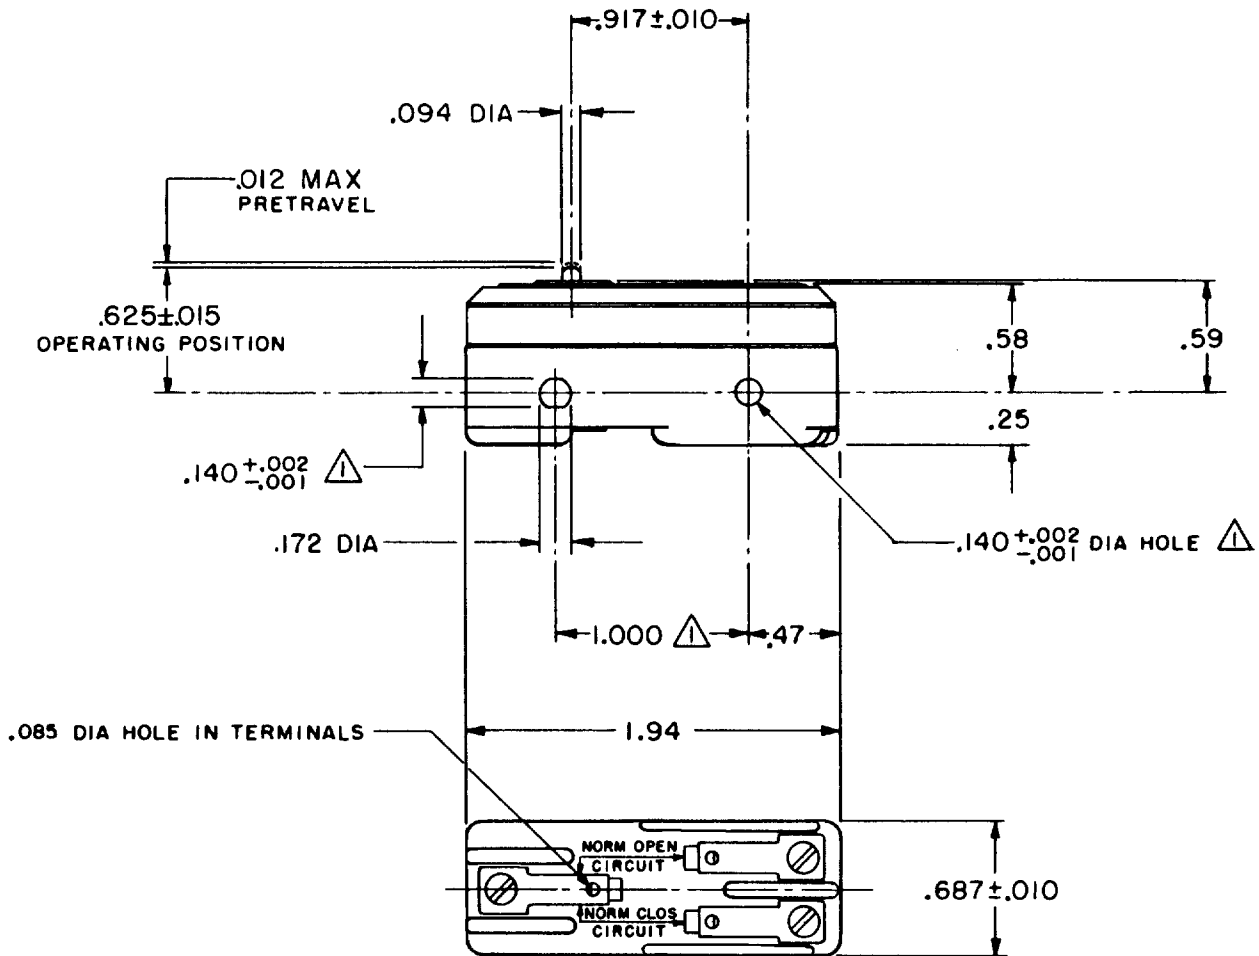

NOTE -
 ▲ - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
 OF .139 MAX DIA ON 1.000±.002 CENTERS
 2 - SWITCH WILL WITHSTAND TEMPERATURE OF 250°F

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE -----7-9 OZ	CONTACT ARRANGEMENT S P D T	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
RELEASE FORCE -----4 OZ MIN	L103 15A 125, 250 OR 480 VAC 1/8HP 125 VAC, 1/4HP 250 VAC   (T)	ONE PLACE (.0) ±.030	
DIFFERENTIAL TRAVEL-----.0003-.0005		TWO PLACE (.00) ±.015	
OVERTRAVEL -----.005 MIN		THREE PLACE (.000) ±.005	
		ANGLES ±	
	-L310-	WEIGHT .050 LB	