

FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

BZ-R2430-P1

ISSUE
3

M

CATALOG LISTING


BZ-R2430-P1

PAGE 1 OF 1

REVISIONS	
A	CO- 73287-C
JAL 20 OCT 93	
B	CO- 94212-L
DLM 9 FEB 00	

[illegible]


FORMTEK
DRAWN

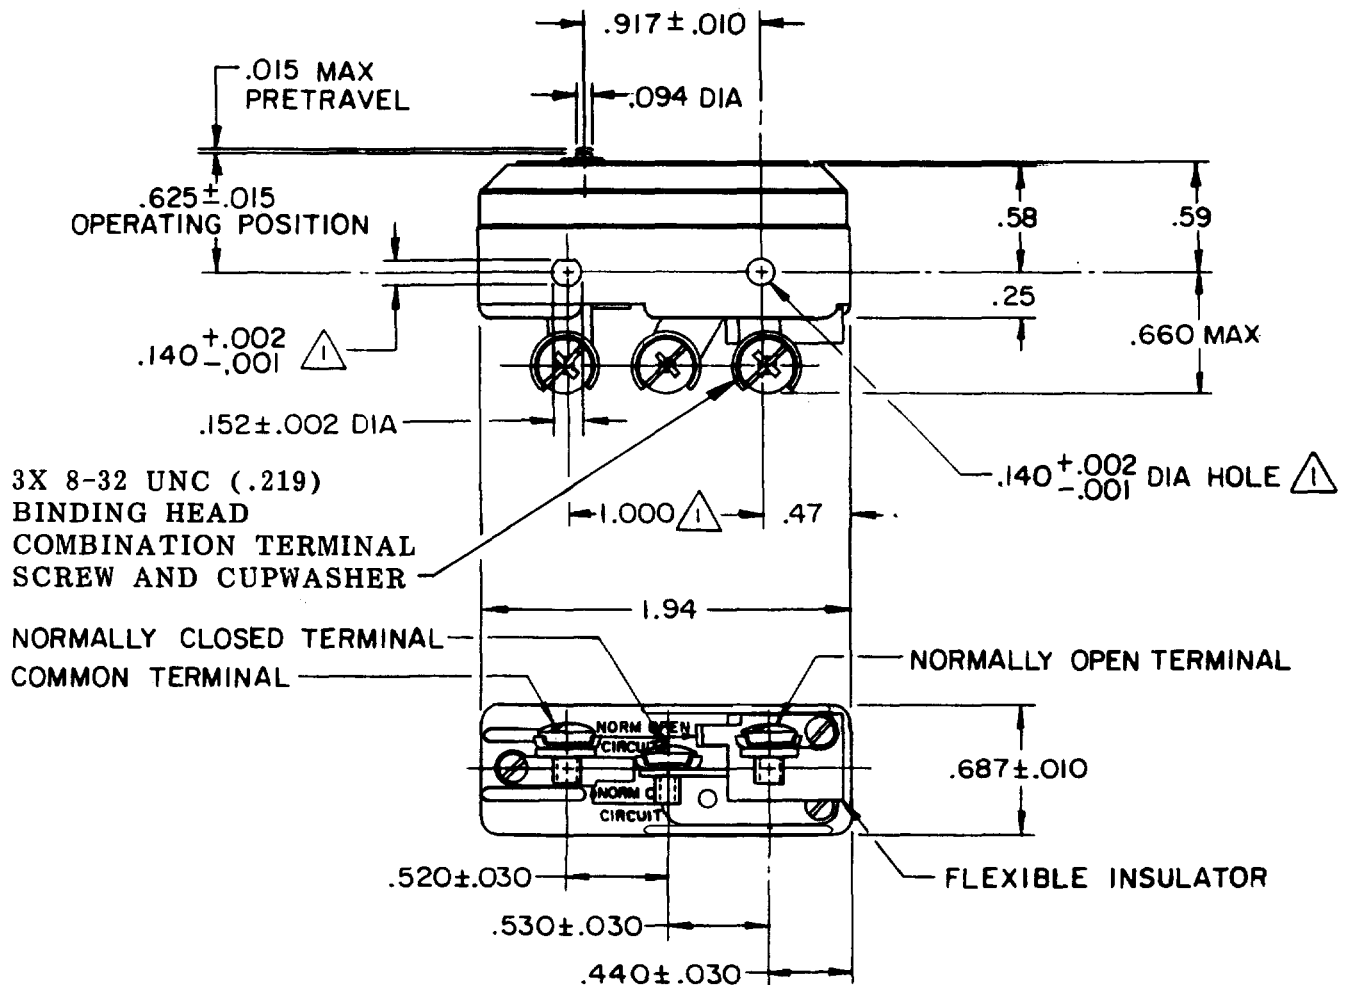

NOTES

- ⚠ MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX DIA ON 1.000±.002 CENTERS
2 - SWITCH WILL WITHSTAND TEMPERATURE OF 400°F FOR 100° HOURS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.



CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE -----7-9 OZ	CONTACT ARRANGEMENT S P D T	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
RELEASE FORCE -----4 OZ MIN	5A-125, <u>250</u> OR 480 VAC -L34-  	ONE PLACE (.0)	±.030
DIFFERENTIAL TRAVEL -.00020-.00035		TWO PLACE (.00)	±.015
OVERTRAVEL -----.005 MIN		THREE PLACE (.000)	±.005
		ANGLES	±
		WEIGHT .060 LB	