

MICRO SWITCH

FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL

FED. MFG. CODE 81929

SWITCH - BASIC

CATALOG LISTING

BZ-R7216

AGH9958

CATALOG LISTING

BZ-R7216

PAGE 1 OF 1

M

ISSUE
10

REPLACES

RELEASE NO. PR-2435

30SEP05

VA

CHECK

72

11 FEB 72

11 FEB 72

11 FEB 72

11 FEB 72

11 FEB 72

11 FEB 72

11 FEB 72

11 FEB 72

11 FEB 72

11 FEB 72

11 FEB 72

11 FEB 72


11 FEB 72

11 FEB 72

11 FEB 72

11 FEB 72

11 FEB 72

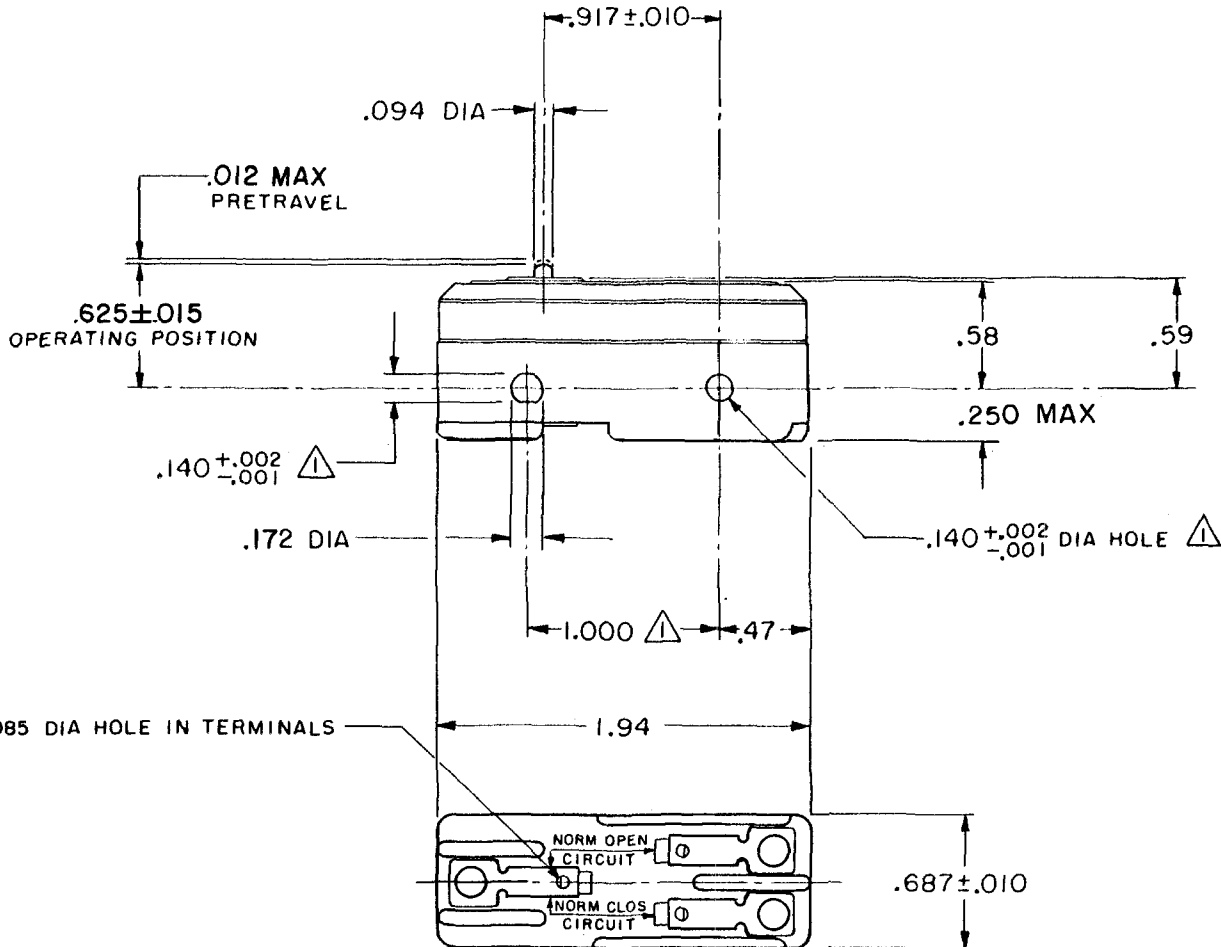

NOTE
1 - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF $.139$ MAX DIA ON $1.000 \pm .002$ CENTERS
2 - CONTACT MATERIAL - GOLD ALLOY

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE — — — — — 7-9 OZ
RELEASE FORCE — — — — — 4 OZ MIN
DIFFERENTIAL TRAVEL — — .00015-.00035
OVERTRAVEL — — — — — .005 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L22 1A 125 VAC

L288
L315
L307

CE   

1A 250 V $\sim$ T85 25E3

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE NOTED

DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
ONE PLACE (.0) $\pm .030$
TWO PLACE (.00) $\pm .015$
THREE PLACE (.000) $\pm .005$
ANGLES $\pm$

WEIGHT .050 LB

RASTER

FO-50378-1A

DRAWN

D B W 10 FEB 72