

MICRO SWITCH


A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
FARMINGTON, CONNECTICUT

FED. MFR. CODE 91929

SWITCH-BASIC

CATALOG LISTING
BZ-R812

DRAWING NUMBER	BZ-R812													
	PAGE 1 OF 1	REPLACES												
ISSUE	5													
	RELEASE NO. SR 9642	CHECK												
REVISIONS	<table border="1"> <tr> <td>A</td> <td>CO46304</td> <td>12 OCT 79</td> </tr> <tr> <td>B</td> <td>CO 58037</td> <td>1 OCT 85</td> </tr> <tr> <td>C</td> <td>CO-78874</td> <td>17 NOV 94</td> </tr> <tr> <td>D</td> <td>CO-94212-J</td> <td>4 OCT 99</td> </tr> </table>		A	CO46304	12 OCT 79	B	CO 58037	1 OCT 85	C	CO-78874	17 NOV 94	D	CO-94212-J	4 OCT 99
A	CO46304	12 OCT 79												
B	CO 58037	1 OCT 85												
C	CO-78874	17 NOV 94												
D	CO-94212-J	4 OCT 99												
FORMTEK	FO-50378	MBF 2 MAY 61												

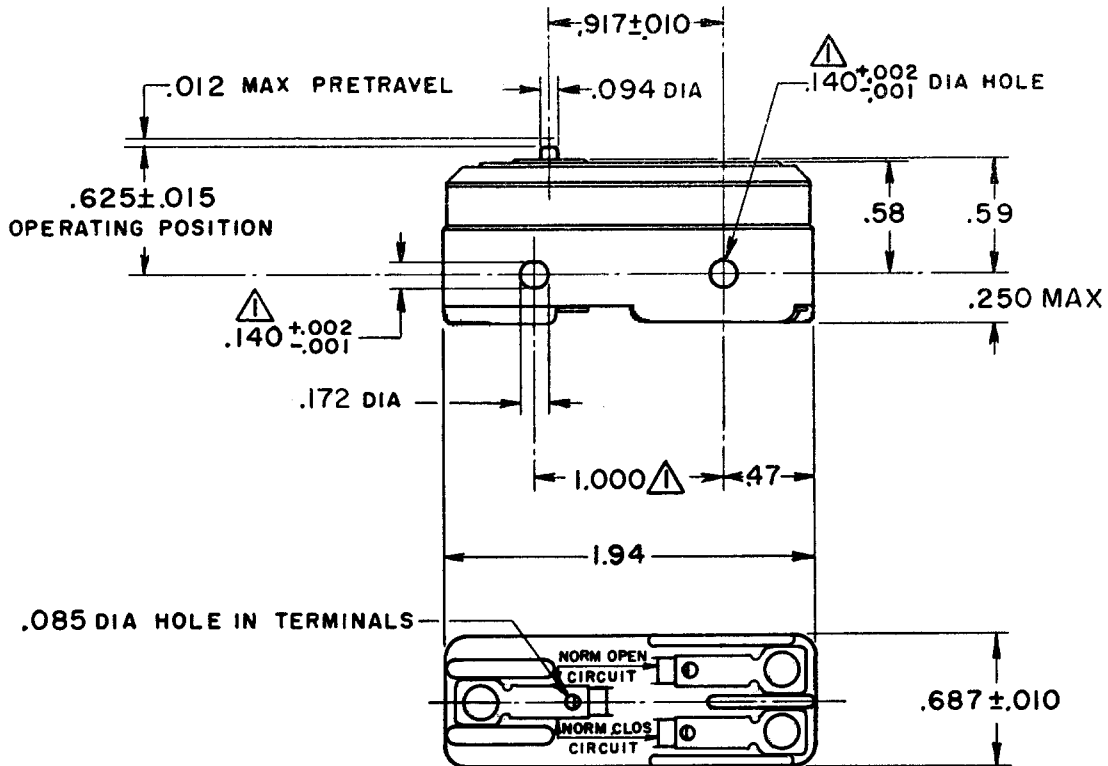

NOTE -
 ▲ MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ± .002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS		ELECTRICAL DATA		SCALE FULL
OPERATING FORCE — — — — — 7 OZ MAX		CONTACT ARRANGEMENT S P D T	BREAK DISTANCE .006 MIN	DO NOT SCALE PRINT
RELEASE FORCE — — — — — 3 OZ MIN				L8 10A 125, <u>250</u> OR 480 VAC  
DIFFERENTIAL TRAVEL — — .0004 — .0007				
OVERTRAVEL — — — — — .005 MIN				
				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: ONE PLACE (.0) ± .030 TWO PLACE (.00) ± .015 THREE PLACE (.000) ± .005 ANGLES ±
				WEIGHT .050 LB

