



MICRO SWITCH
FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

BZ-RD

CATALOG LISTING
BZ-RD
PAGE 1 OF 1

M

ISSUE
19

REVISIONS

A	CO	15200
W L K	19 MAR 64	
B	CO23645	
M B F	22 JAN 68	
C	CO46304	
R J H	21 NOV 79	
D	CO	58037
SMA	1 OCT 85	
E	CO-	78874
DLT	17 NOV 94	
F	CO-	94212-J
J J A	4 OCT 99	
G	203155	
CSL	24 MAY 01	

REPLACES

RELEASE NO.

CHECK

CHECK

21 MAR 64

DAW


CHECK

W L K 19 MAR 64

RASTER

FO-50376

DRAWN

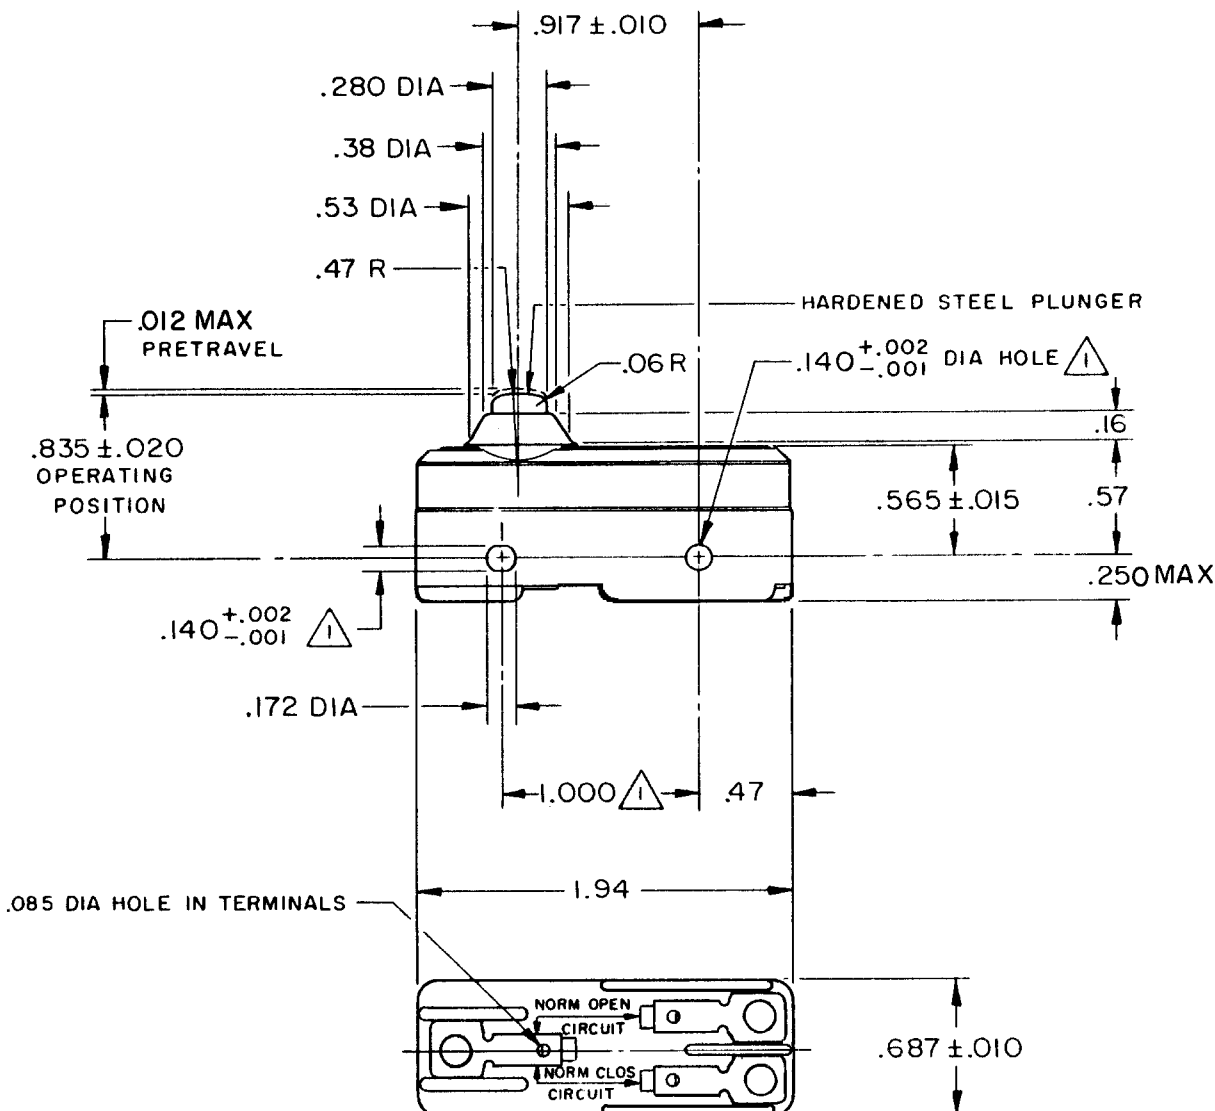

NOTE -



MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX DIA ON 1.000 ± .002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE ----- 6-9 1/2 OZ

RELEASE FORCE ----- -4 OZ MIN

DIFFERENTIAL TRAVEL --- .0002-.0005

OVERTRAVEL ----- .060 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L103 15A 125, 250 OR 480 VAC
1/8HP 125 VAC, 1/4HP 250 VAC

L288
L299
L306



16A 250V ~ T85 5E4

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
NOTED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE (.0) ±.030
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.005
ANGLES ±

WEIGHT .051 LB