


CATALOG LISTING

N

Issue

REVISIONS

A	C080986
JALA 26 JUN 95	
B	CO- 94212 -C
DLT 15 SEP 99	
C	203155
CSL 24 MAY 01	

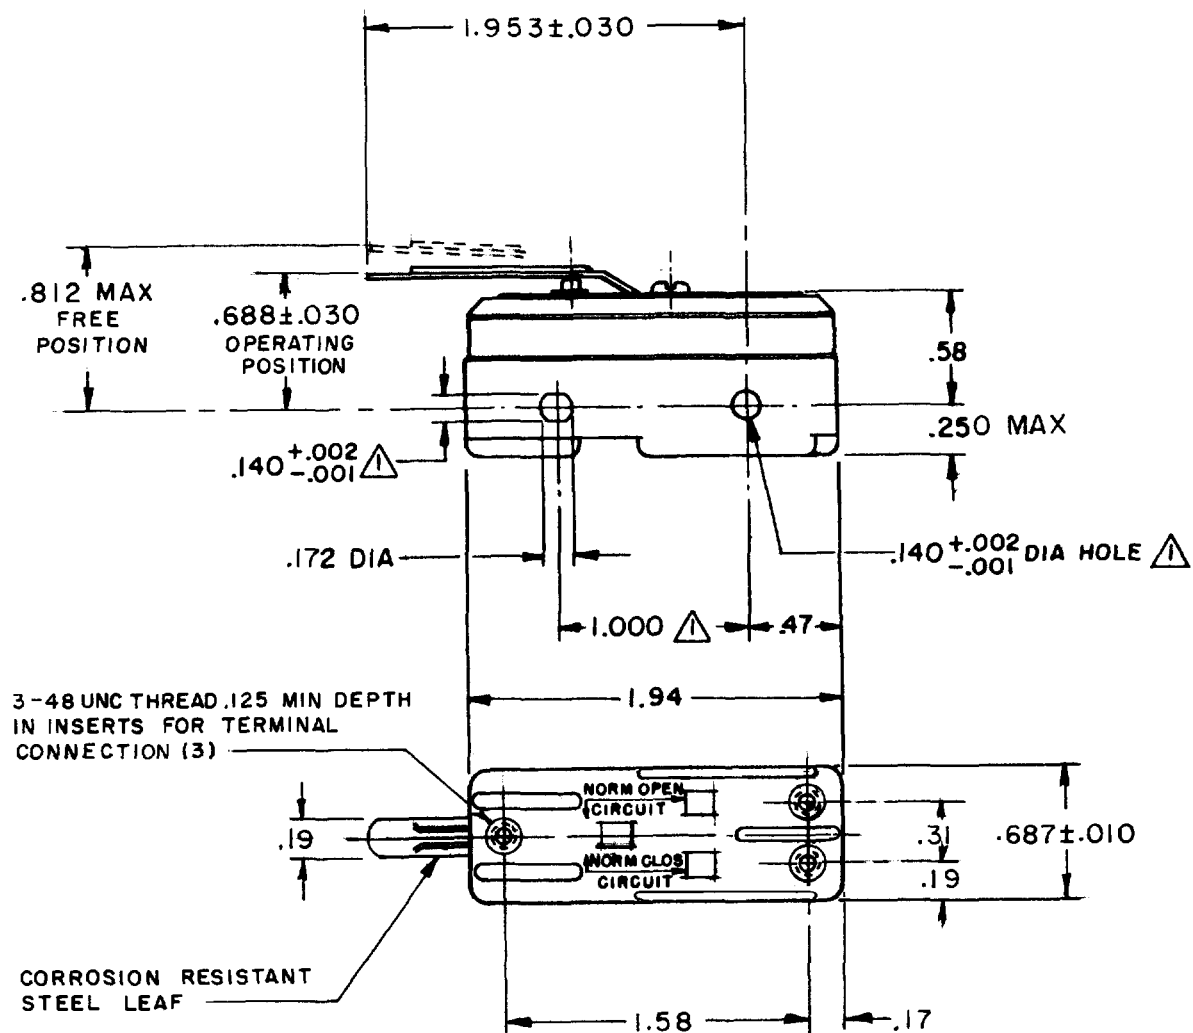

NOTE -

▲-MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX DIA ON 1.000 $\pm$.002 CENTERS
2 - 3-48 NC X .125 REF SCREW (3) FURNISHED UNASSEMBLED

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS		ELECTRICAL DATA		SCALE FULL	
OPERATING FORCE — — — 3 OZ MAX		CONTACT ARRANGEMENT S P D T		DO NOT SCALE PRINT	
RELEASE FORCE — — — 1/2 OZ MIN		L103 15A 125, <u>250</u> OR 480 VAC 1/8HP 125 VAC, 1/4HP <u>250</u> VAC     L288 L299 L306 16A 250V  T85 5E4		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:	
DIFFERENTIAL TRAVEL — — — .030 MAX				ONE PLACE (.0) ±.030 TWO PLACE (.00) ±.015 THREE PLACE (.000) ±.005 ANGLES ±	
DO NOT OVERTRAVEL MORE THAN — .062				WEIGHT .050 LB	



MICRO SWITCH
FREEPORT ILLINOIS
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING
BZ-RL95

BZ-RL95
PAGE 1 OF 1

M

DRAWING
NUMBER

6

ISSUE

REPLACES

SR 10754

RELEASE NO.

CHECK

30 JAN 63

B J

CHECK

30 JAN 63


LSD

CHECK

30 JAN 63

MBF

DRAWN

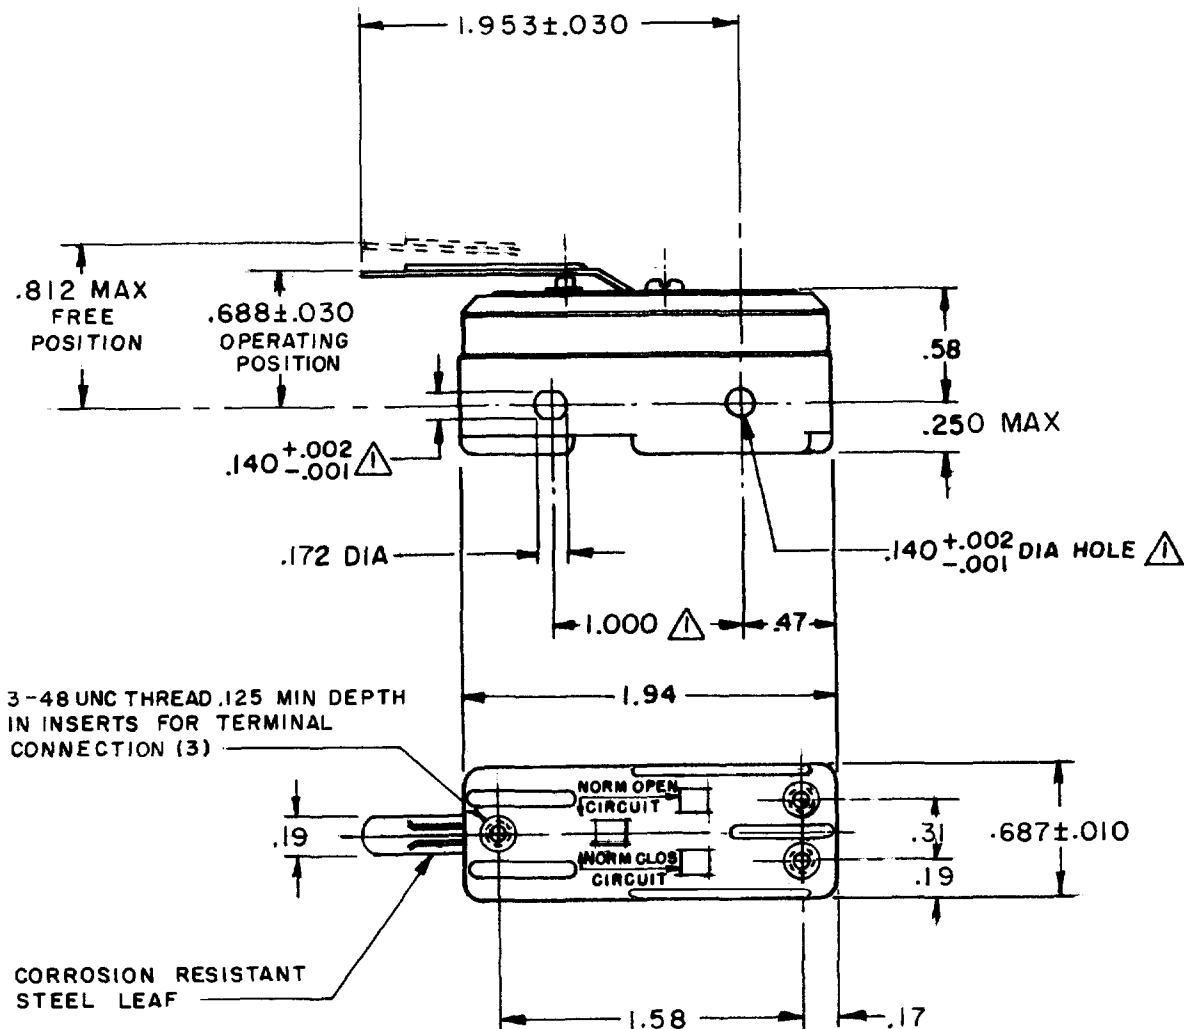

NOTE -

- △ - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ± .002 CENTERS
- 2 - 3-48 NC X .125 REF SCREW (3) FURNISHED UNASSEMBLED

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE — — — — 3 OZ MAX

RELEASE FORCE — — — — 1/2 OZ MIN

DIFFERENTIAL TRAVEL — — — .030 MAX

DO NOT OVERTRAVEL MORE THAN — .062

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

UNDERWRITERS' LAB. INC. LISTED RATING
-L103- 15 A-125, 250 OR 480 VAC
1/8 HP-125 VAC; 1/4 HP-250 VAC



SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

ONE PLACE (.0) ± .030
TWO PLACE (.00) ± .015
THREE PLACE (.000) ± .005
ANGLES

WEIGHT .050 LB

FORMTEK