

MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
PREPONT, ILLINOIS

FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

BZ-RLX

BZ-RLX

M

DRAWING
NUMBER

13

ISSUE

REPLACES

RELEASE NO.

CHECK

REVISIONS

A CO18748
M B F
21 JAN 64
B CO77590
DLT
9 JUN 94

CHECK


28 JAN 64

DAW

CHECK

21 JAN 64

M B F

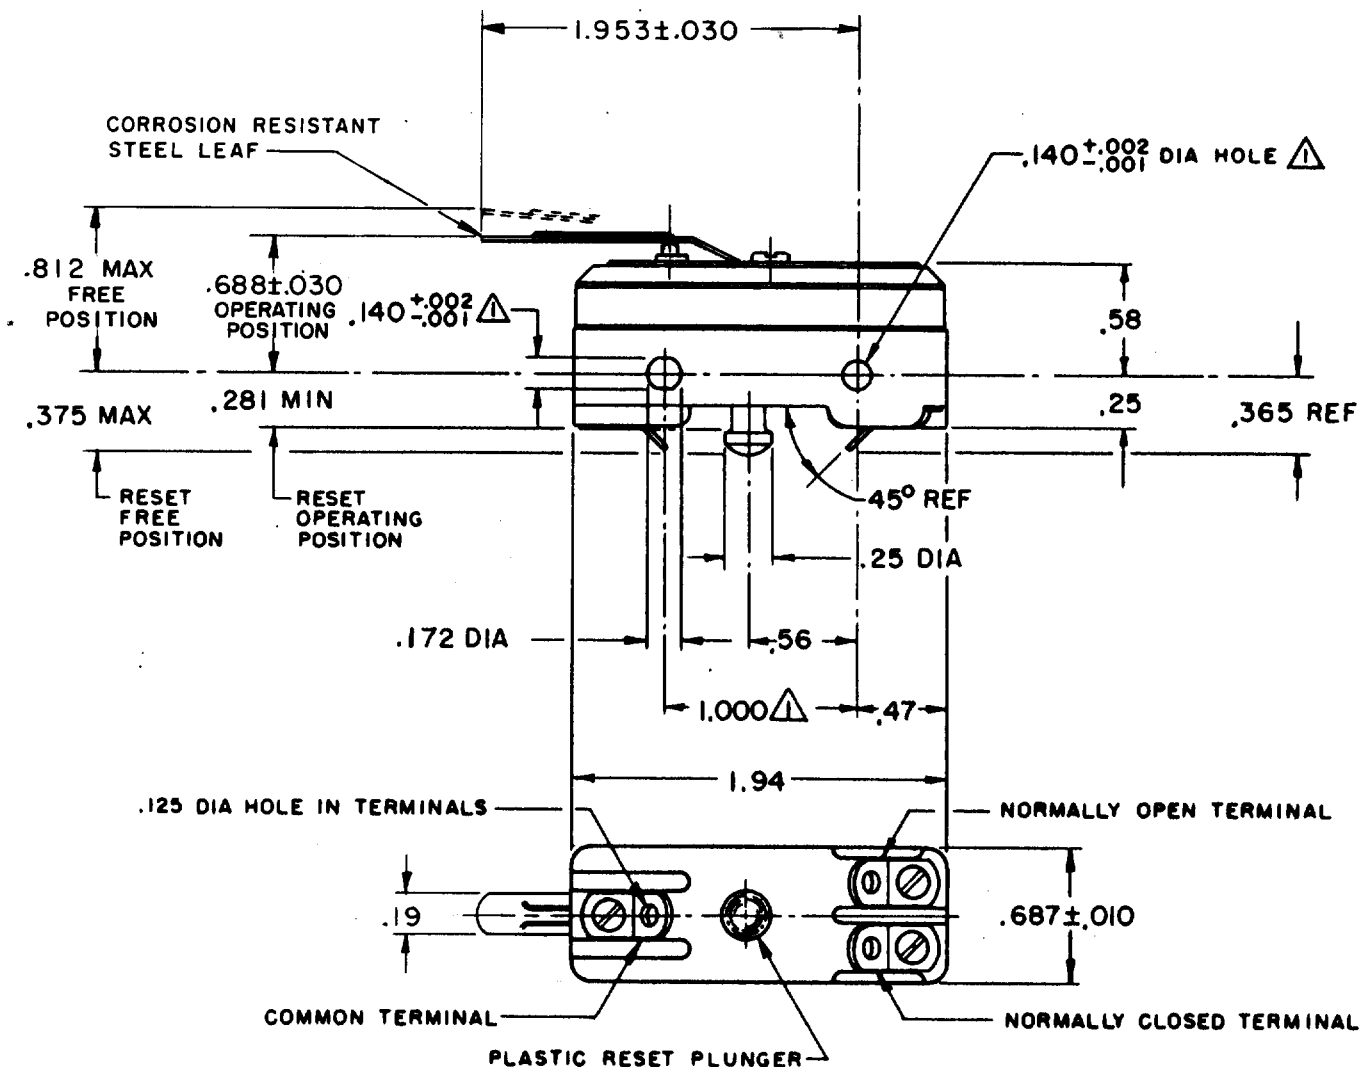

NOTE -

△ - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX DIA ON $1.000 \pm .002$ CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE - - - - - 3 OZ MAX
DO NOT OVERTRAVEL MORE THAN - - - .062

RESET CHARACTERISTICS

OPERATING FORCE - - - - - 2-10 OZ
OVERTRAVEL - - - - - .015 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
SINGLE POLE DOUBLE THROW
MAINTAINED CONTACT

UNDERWRITERS' LAB. INC. LISTED RATING
-L67-
15 A-125, 250, OR 480 VAC
1/4 HP-125 VAC; 1/2 HP-250 VAC
1/2 A-125 VDC; 1/4 A-250 VDC



SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
SPECIFIED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE (.0) $\pm .030$
TWO PLACE (.00) $\pm .015$
THREE PLACE (.000) $\pm .005$
ANGLES $\pm$

WEIGHT