

MICRO SWITCH


A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
PREPONT, ILLINOIS

FED. MFG. CODE 91020

SWITCH-BASIC

CATALOG LISTING

BZ-RQIX

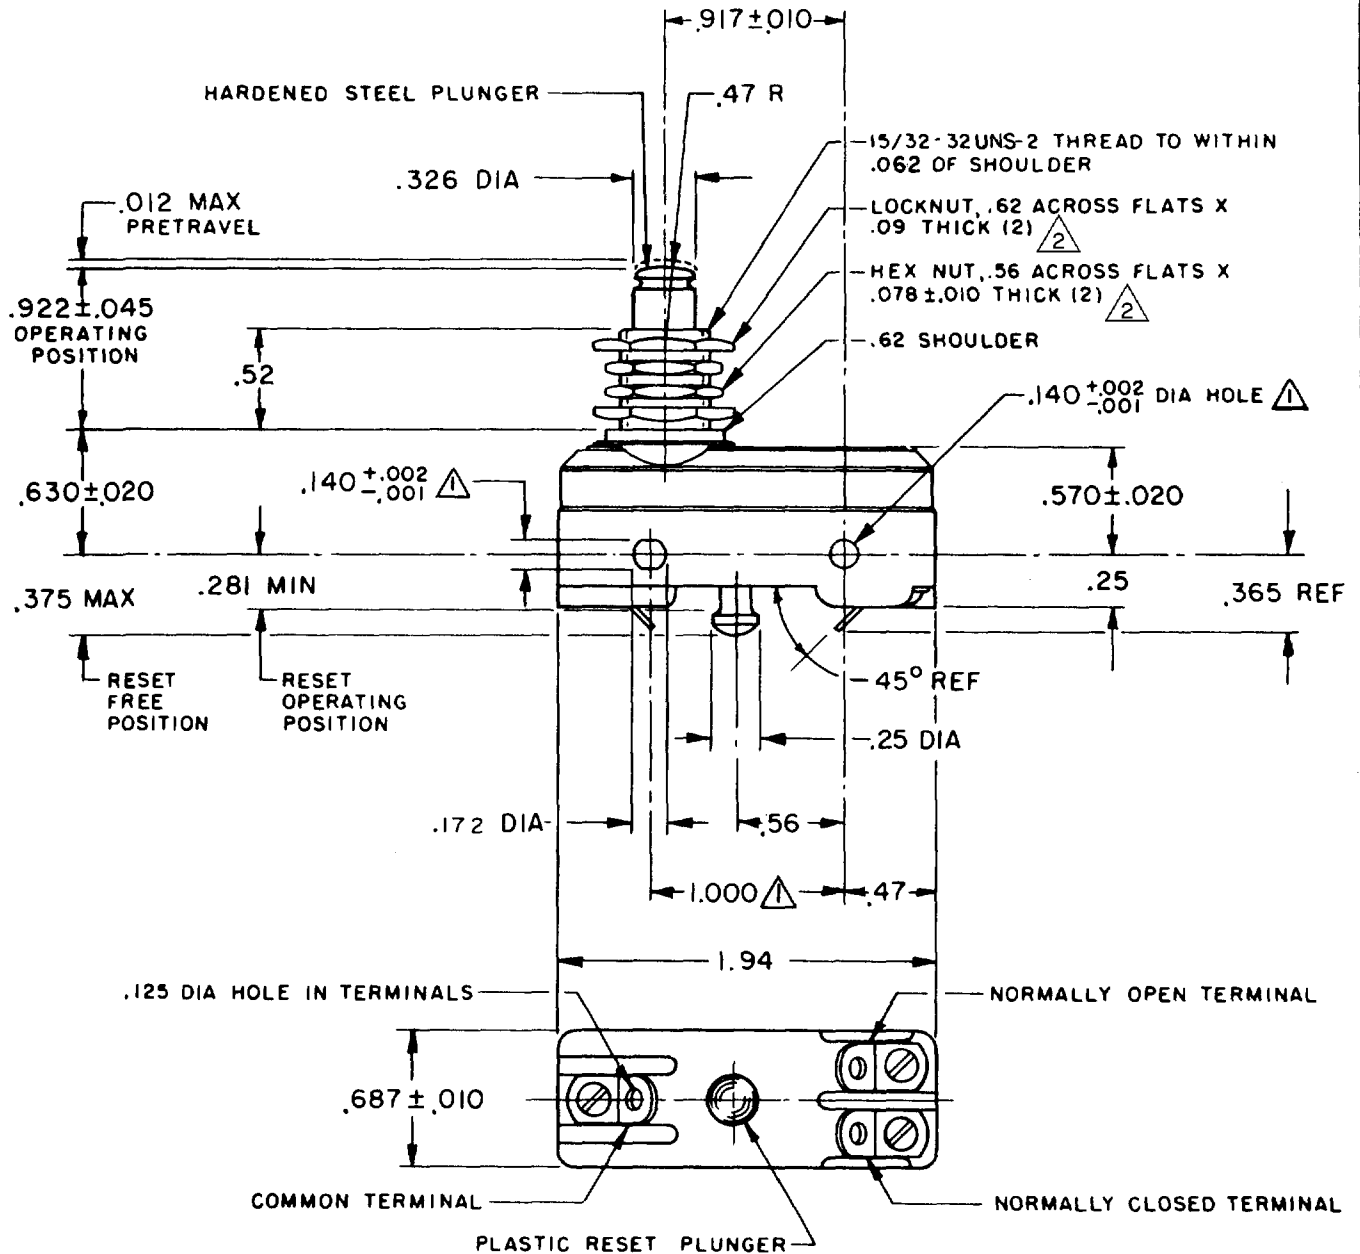

- NOTES
- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ± .002 CENTERS
 - 2 HARDWARE FURNISHED UNASSEMBLED

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE ----- 6 - 9 1/2 OZ
OVERTRAVEL ----- .219 MIN

RESET CHARACTERISTICS

OPERATING FORCE ----- 2 - 10 OZ
OVERTRAVEL ----- .015 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
SINGLE POLE DOUBLE THROW
MAINTAINED CONTACT

UNDERWRITERS' LAB. INC. LISTED RATING
15 A - 125, 250, OR 480 VAC
-L 67- 1/4 HP - 125 VAC; 1/2 HP - 250 VAC
1/2 A - 125 VDC; 1/4 A - 250 VDC



SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

ONE PLACE (.01) ± .030
TWO PLACE (.001) ± .015
THREE PLACE (.0001) ± .005
ANGLES ±

WEIGHT

BZ-RQIX

DRAWING NUMBER

ISSUE

16

16

REVISIONS

A CO 16325
GCH 15 JAN 62

B CO-34307
JAL 22 JAN 76

C CO 45448
SLB 15 FEB 79

D CO77590
DLT 9 JUN 94

E CO-82133
CSL 31 JUL 96

FORMTEK

BZ-RQIX
ISSUE II

REPLACES

RELEASE NO.

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK