

MICRO SWITCHFREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929**SWITCH—BASIC**

CATALOG LISTING

BZ-RQ69**BZ-RQ69****M**DRAWING
NUMBER

ISSUE

6

REPLACES

RELEASE NO. CO-8520

CHECK

REVISIONS

A	NEW DWG	CO34158
K	P	K
30	SEP	74
B	CO36098	
K	P	K
3	JUN	77
C	CO-	73287-J
	JAL	
22	NOV	93
D	CO-	77592
	DAW	
15	AUG	94

CHECK

OCT 74

JUN 75

JUN 76

JUN 77

JUN 78

JUN 79

JUN 80

JUN 81

JUN 82

JUN 83

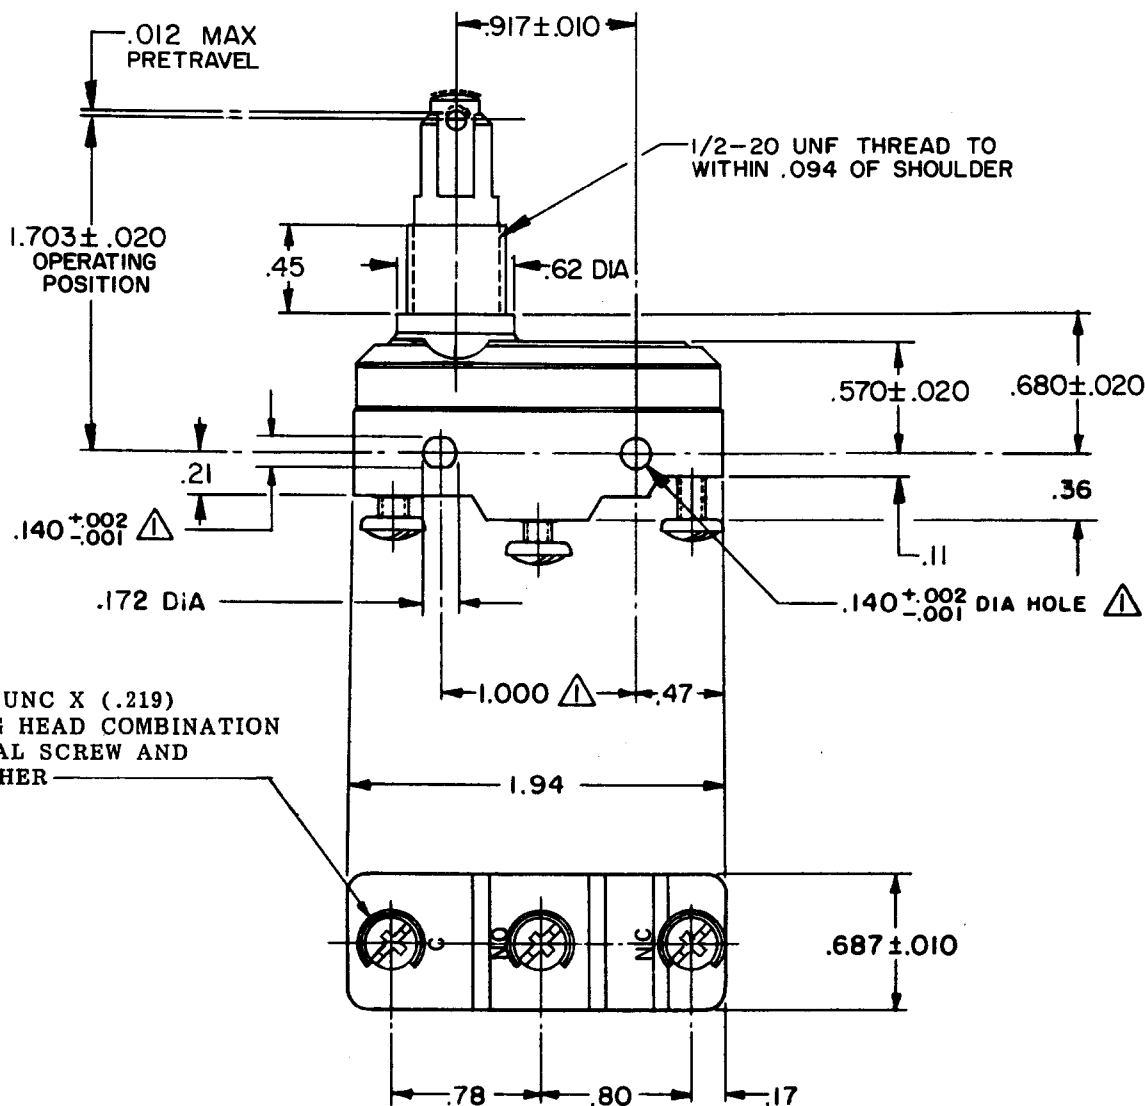
JUN 84

JUN 85

JUN 86

JUN 87


JUN 88

**NOTE -**

- △ - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000±.002 CENTERS
2 - THIS IS A REPLACEMENT TYPE SWITCH, .50 DIA ROLLER AND OTHER NECESSARY PARTS FURNISHED UNASSEMBLED AS A PACKET

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

**CHARACTERISTICS**

OPERATING FORCE-----6-9 1/2 OZ
RELEASE FORCE-----4 OZ MIN
DIFFERENTIAL TRAVEL---.0002-.0005
OVERTRAVEL-----.140 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

UL LISTED - FILE E12252
CODE L103 15A-125, 250 OR 480 VAC
1/8HP-125 VAC; 1/4HP-250 VAC

**SCALE FULL****DO NOT SCALE PRINT****TOLERANCES**

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

DIM.	TOL.	DIM.	TOL.
mm	mm/in	in	mm/in
NO PLACES	X	1/.04	X
ONE PLACE	X,X	0.4/.016	X,X
TWO PLACES	X,X,X	0.15/.006	X,X,X
THREE PLACES	X,X,X,X	0.38/.015	X,X,X,X
ANGLES	X,X,X,X	0.13/.005	X,X,X,X

SI METRIC

US CUSTOMARY

DESIGN UNITS



WEIGHT .138 LB

FO-52848-A

DRAWN

K P K30 SEP 74