



CATALOG LISTING
BZ - RS66

5

REVISIONS

A	CO15200
RES	
16 JUNE 64	
B	CO23645
M B F	
22 JAN 68	
C	CO44156
SJS	
20 APR 78	
D	OBS DWG
CO71605	
CSL	
20 JUL 92	
E	REINST
CO78269	
PLT	
12 JUL 94	

22 Jun 64

Q57


CHECK

NE 64

16 J

RES

DRAWN

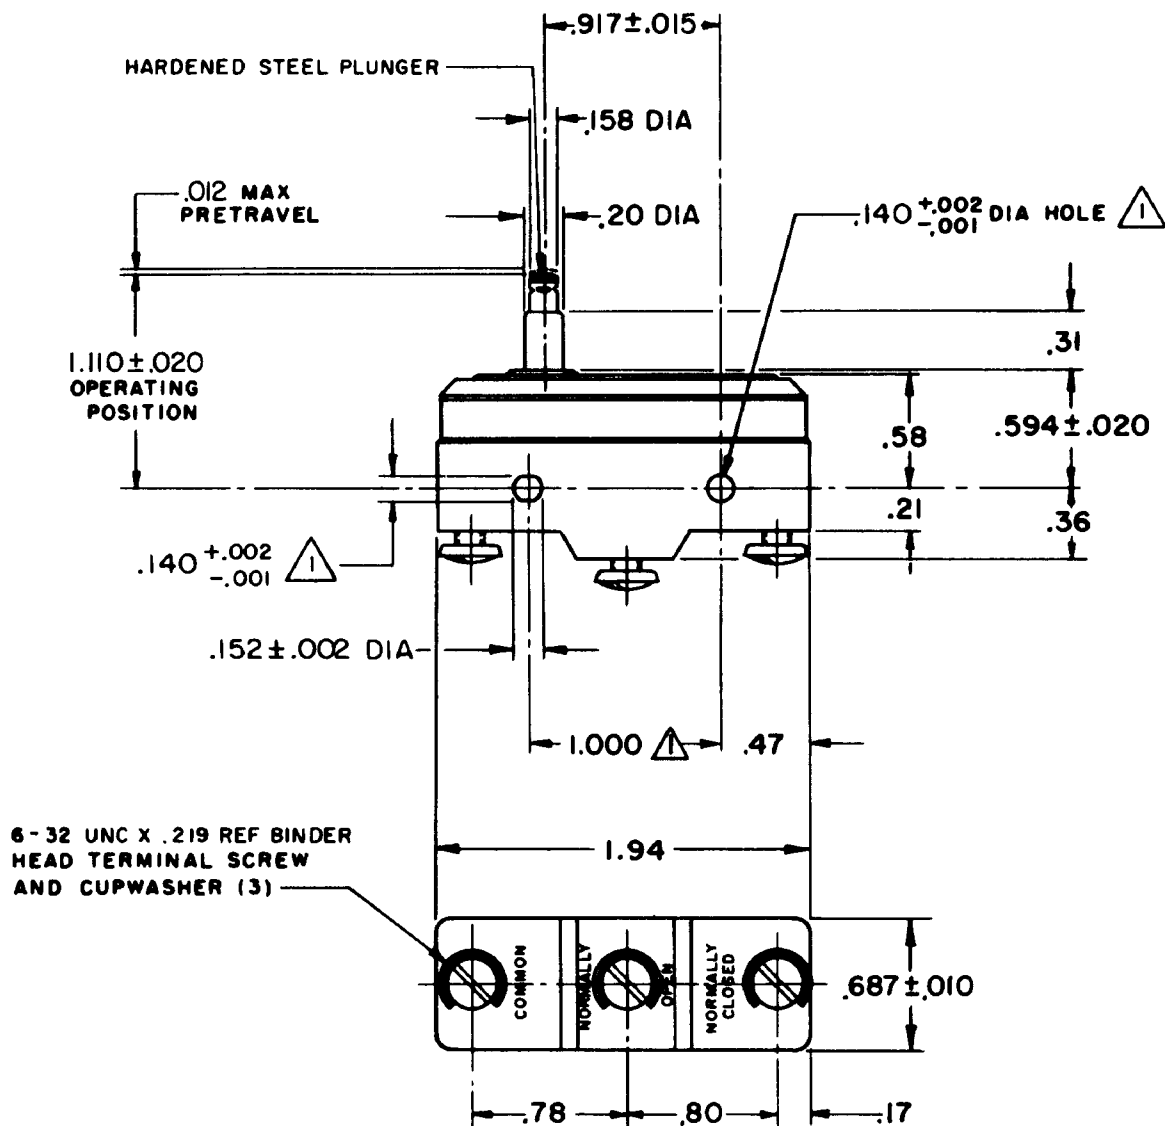

NOTE --

△- MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX DIA ON $1.000 \pm .002$ CENTERS.

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE — — — — 7 - 9 1/2 OZ	CONTACT ARRANGEMENT S P D T	DO NOT SCALE PRINT
RELEASE FORCE — — — — 4 OZ MIN	L103 15A 125, <u>250</u> OR 480 VAC 1/8HP 125 VAC, 1/4HP <u>250</u> VAC	UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES TOLERANCES ARE:
DIFFERENTIAL TRAVEL--.0002 - .0004		ONE PLACE (.0) ±.030 TWO PLACE (.00) ±.015 THREE PLACE (.000) ±.005 ANGLES ±
OVERTRAVEL - - - - - .060 MIN		WEIGHT .063 LB