

# MICRO SWITCH

FREEPORT ILLINOIS, U.S.A  
A DIVISION OF HONEYWELL  
FED. MFG. CODE 91929

## SWITCH - BASIC

CATALOG LISTING  
**BZ-RT04**

AGB0000

M8805/I-027

ISSUE 8

REPLACES

RELEASE NO.

ASD

CHECK

EVISONS

A

B

C

D

E

KVS

25JUL08

26JAN68

LSD

CHECK

5 JAN 68

RASTER

0-50378-1A

DRAWN

ISSUE

13

13

13

13

13


13

13

6-32 UNC X .219 REF BINDING  
HEAD TERMINAL SCREW AND  
LOCKWASHER (SEMS) (3)

NOTE -

△ - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS  
OF .139 MAX DIA ON 1.000±.002 CENTERS

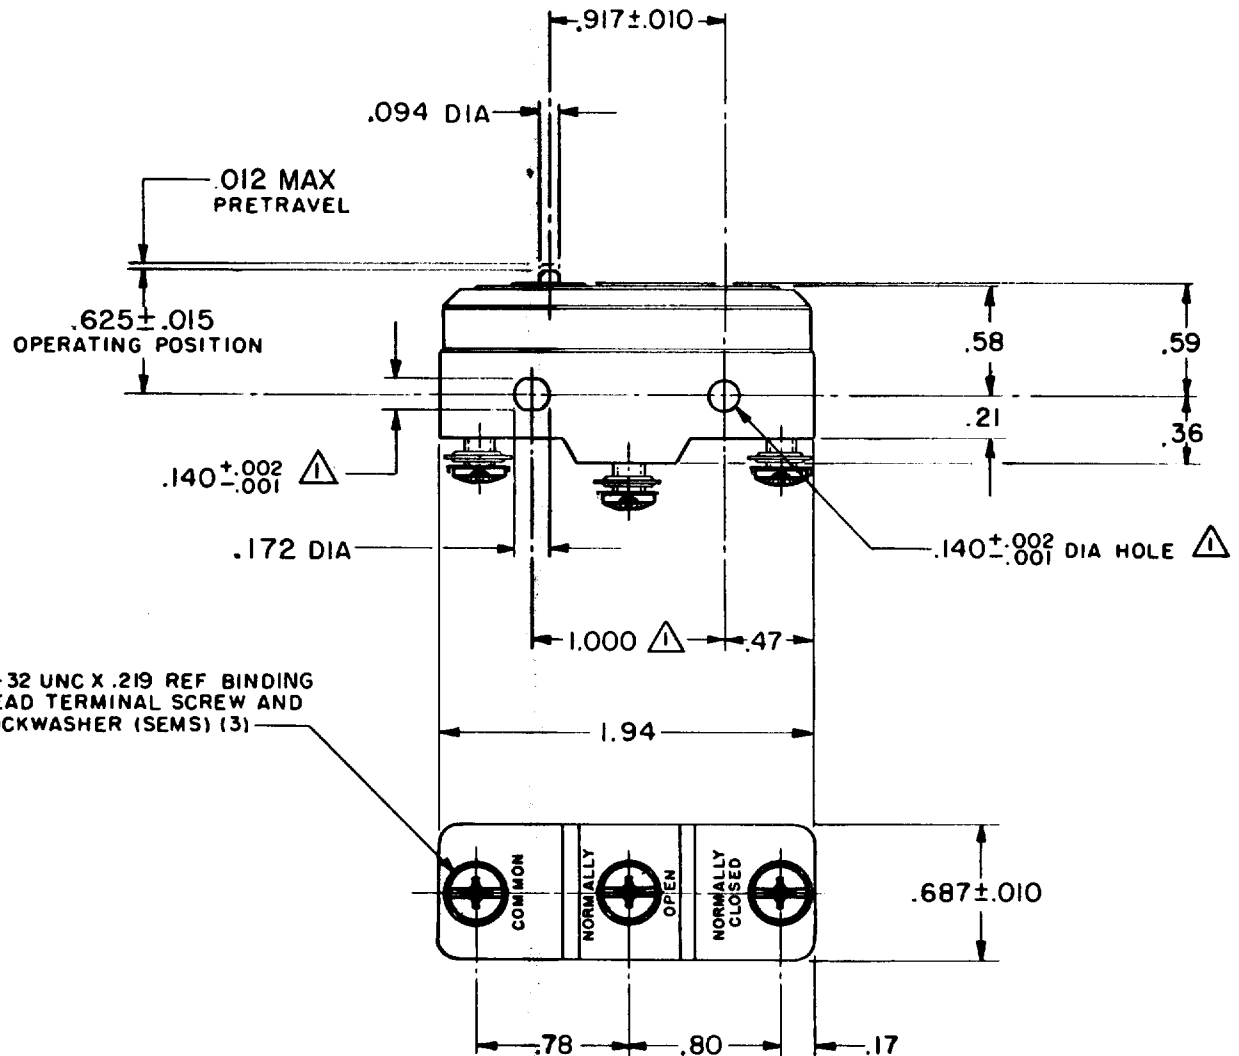

### CHARACTERISTICS

OPERATING FORCE — — — — — 7- 10 OZ  
RELEASE FORCE — — — — — 6 OZ MIN  
DIFFERENTIAL TRAVEL — — — .0015 MAX  
OVERTRAVEL — — — — — .005 MIN

### ELECTRICAL DATA

CONTACT ARRANGEMENT  
S P D T

L103  
15A 125, 250 OR 480 VAC  
1/8HP 125 VAC, 1/4HP 250 VAC



### SCALE -

DO NOT SCALE PRINT

UNLESS OTHERWISE  
NOTED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE (.0) ±.030  
TWO PLACE (.00) ±.015  
THREE PLACE (.000) ±.005  
ANGLES ±

WEIGHT .063 LB