


MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 81928

SWITCH - BASIC


CATALOG LISTING
BZ-RW80331

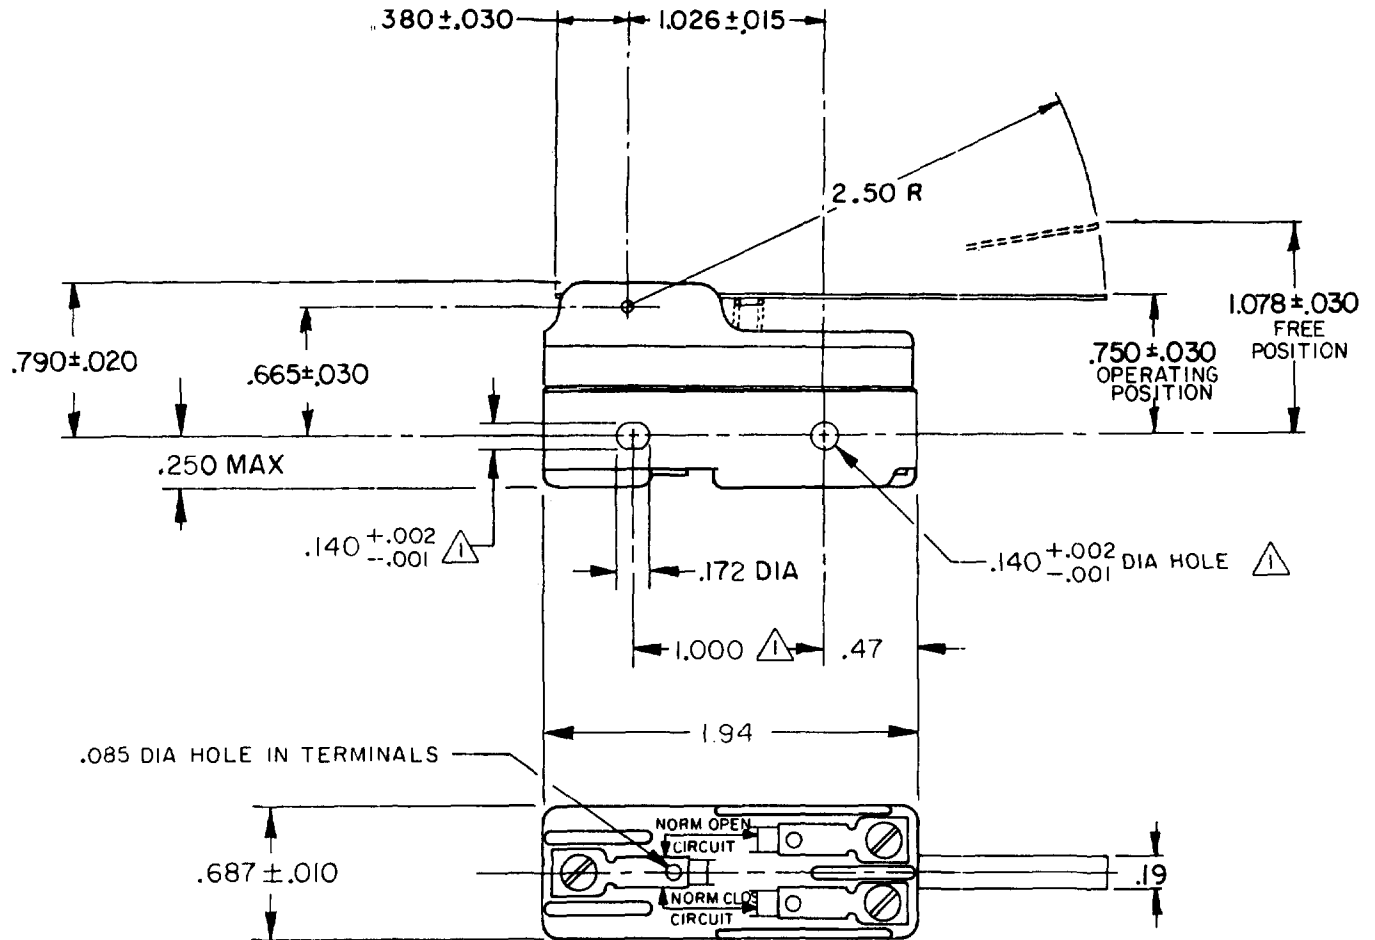

NOTE
MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX DIA ON $1.000 \pm .002$ CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE — — — $2 \frac{1}{4}$ OZ MAX
RELEASE FORCE — — — $\frac{1}{2}$ OZ MIN
DIFFERENTIAL TRAVEL — — .003-.015
OVERTRAVEL — — — — .219 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L103 15A 125, 250 OR 480 VAC
1/8HP 125 VAC, 1/4HP 250 VAC

L288
L299
L306



16A 250V $\sim$ T85 5E4

SCALE FULL DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE (.0) $\pm .030$
TWO PLACE (.00) $\pm .015$
THREE PLACE (.000) $\pm .005$
ANGLES $\pm$

WEIGHT .060 LB

CATALOG LISTING
BZ-RW80331
PAGE 1 OF 1

M

ISSUE
5

REPLACES

RELEASE NO. PR-9162

CHECK

REVISIONS

A 203155
CSL
24 MAY 01

CHECK

24 MAY 01

SAV

CHECK

24 MAY 01

RASTER

DRAWN

MICRO SWITCH

FREEPORT ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH - BASIC

BZ-RW80331

BZ-RW80331

PAGE 1 OF 1

M

DRAWING
NUMBER

8

X

ISSUE

4

REPLACES

RELEASE NO. PR-9162

CHECK

REVISIONS

A	CO-58037
	SMA 1 OCT 85
B	CO-77591
	DAW 22 JUN 94
C	CO-94212-C
	DLT 17 SEP 99

CHECK

10 JULY 80

C E B

CHECK


10 JUL 80

K A G

FORMTEK


FO-52848-A

DRAWN

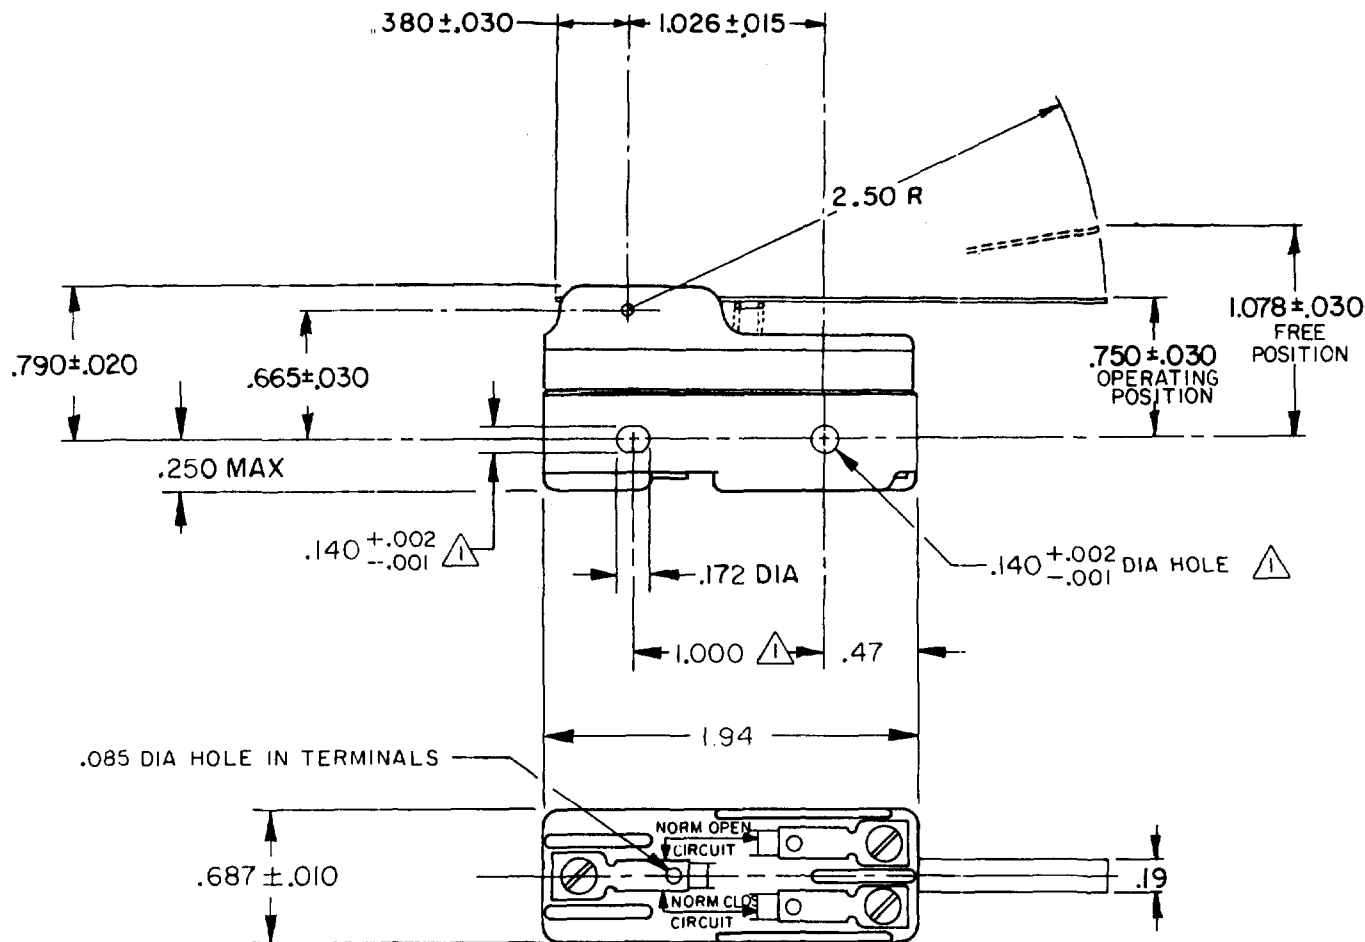

NOTE
MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX DIA ON 1.000 ± .002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.



CHARACTERISTICS

OPERATING FORCE ---- 2 1/4 OZ MAX
RELEASE FORCE ---- 1/2 OZ MIN
DIFFERENTIAL TRAVEL ---- .003 - .015
OVERTRAVEL ---- .219 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

UL LISTED - FILE E12252
CODE L103 15A-125, 250 OR 480 VAC
1/8HP-125 VAC; 1/4HP-250 VAC



SCALE FULL

DO NOT SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR
REFERENCE. UNLESS NOTED, TOLERANCES ARE:

NO PLACES	DIM.	TOL.	DIM.	TOL.
	mm	mm/in	in	in
ONE PLACE	X	1/16	X	1/16
TWO PLACES	X,X	0.4/0.016	X,X	0.016
THREE PLACES	X,X,X	0.15/0.006	X,X,X	0.006
ANGLES				

DESIGN UNITS ☐ METRIC ☐ US CUSTOMARY

WEIGHT .060 LB