

MICRO SWITCH

FREEPORT ILLINOIS U S A
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

BZ-RW80722-A2

BZ-RW80722-A2

PAGE 1 OF 1

M

DRAWING
NUMBER

5

ISSUE

REPLACES X66741-BZ

RELEASE NO. PR-6628

CHECK

REVISIONS

A	CO-73287-J	JAL	22 NOV 93
B	CO-77589	KDR	29 MAR 94
C	CO-82586	JAL	23 APR 96
D	C093346	DLT	19 AUG 98

CHECK


4 AUG 77

C E B

3 AUG 77

FORMITEK
FO-52848-A

DRAWN

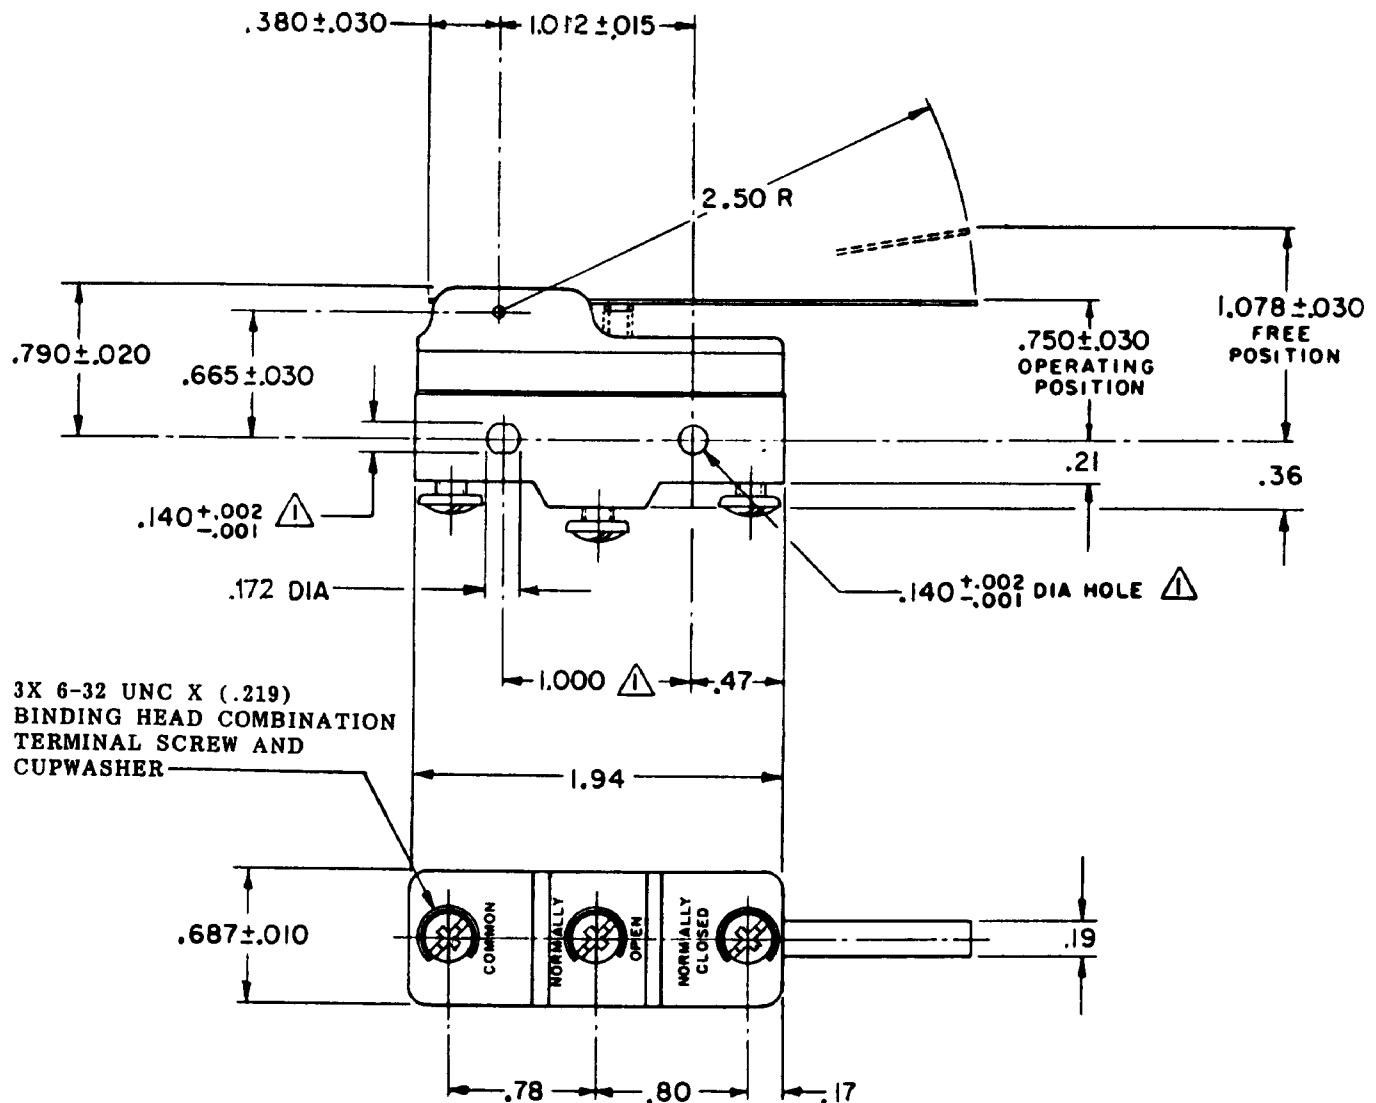


NOTES

- △ - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ± .002 CENTERS
- 2 - CONTACT MATERIAL - GOLD ALLOY

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE --- 2 1/4 OZ MAX
RELEASE FORCE --- 1/2 OZ MIN
DIFFERENTIAL TRAVEL --- .003-.015
OVERTRAVEL --- .219 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

UL LISTED - FILE E12252
CODE L22 1A-125 VAC

L288
L299
L307



1A 250V ~ T85 25E3

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS CONVERSIONS ARE ONLY FOR REFERENCE UNLESS NOTED TOLERANCES ARE ±

	DM.	TOL	DM.	TOL
	mm	mm/in	in	mm/in
NO PLACES	X	1/104	X	0.01/03
ONE PLACE	X,X	0.4/018	X,X	0.38/015
TWO PLACES	X,XX	0.15/008	X,XX	0.13/005
THREE PLACES	X,XXX		X,XXX	
ANGLES				

DESIGN UNITS ☐ SI METRIC ☒ US CUSTOMARY

WEIGHT .073 LB