


MICRO SWITCH

FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

BZ-RW82051-A2

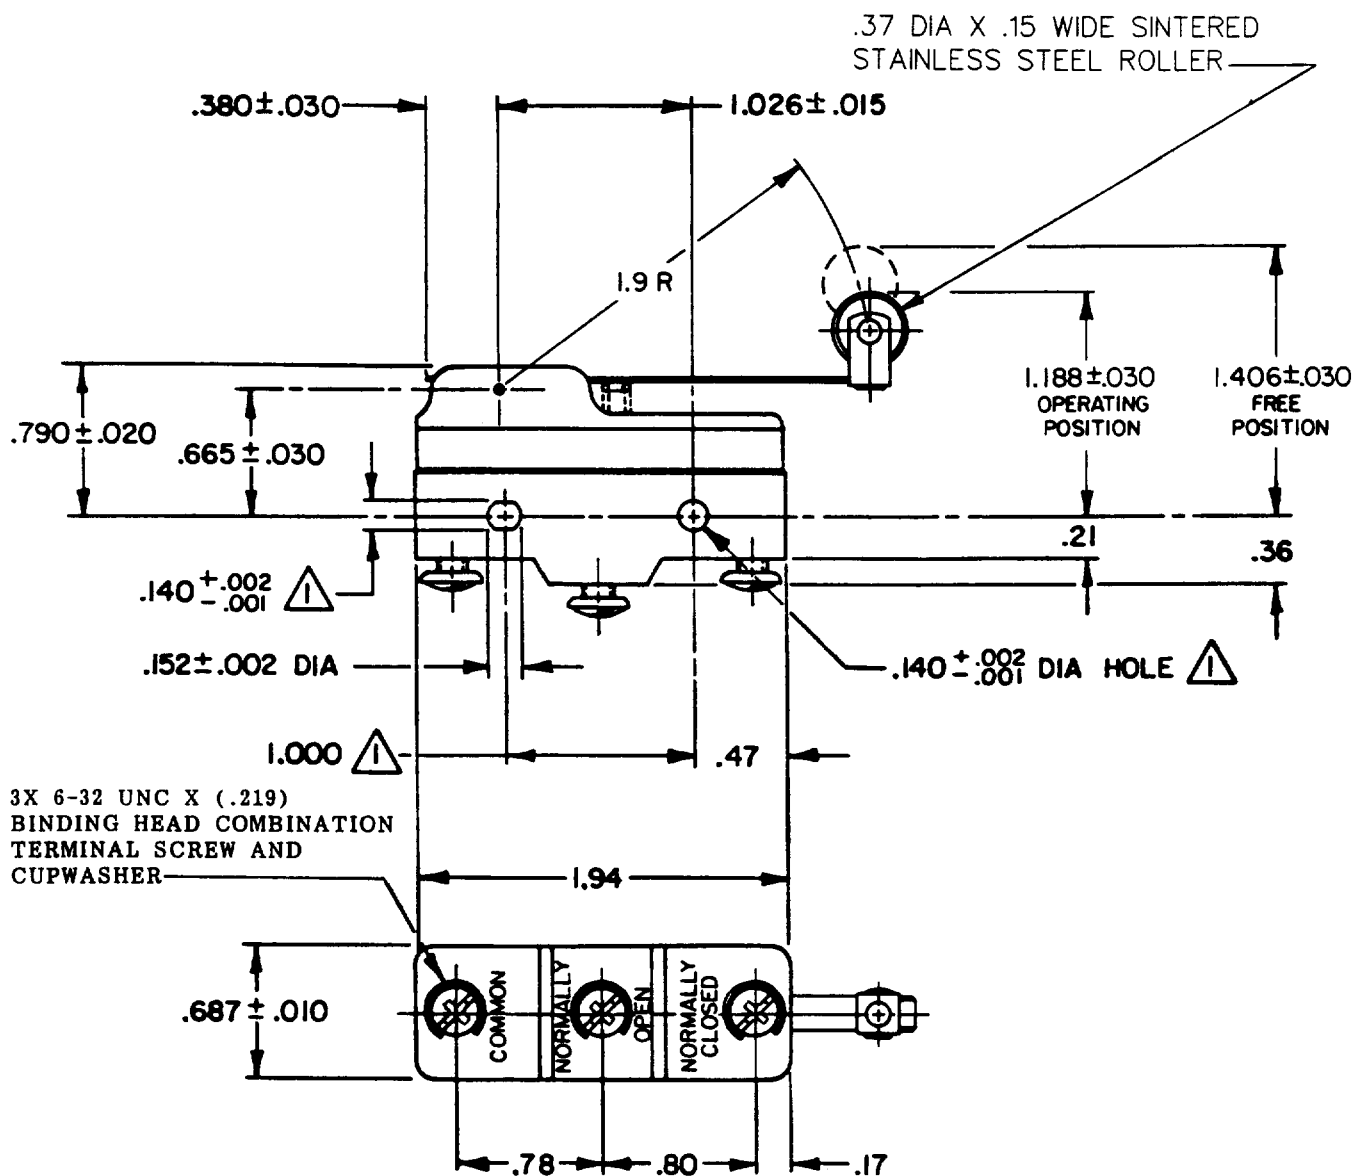

NOTE -

⚠ - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF $.139$ MAX DIA ON $1.000 \pm .002$ CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

CHARACTERISTICS

OPERATING FORCE — — — — 3 OZ MAX

RELEASE FORCE — — — — 3/4 OZ MIN

DIFFERENTIAL TRAVEL — — — .002-.015

OVERTRAVEL — — — — .156 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L103 15A 125, 250 OR 480 VAC
1/8HP 125 VAC, 1/4HP 250 VAC

L288
L299
L306



16A 250V $\sim$ T85 5E4

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE $\pm$

DESIGN UNITS	TOL.	DESIGN UNITS	TOL.
ONE PLACE	$\pm .1$	ONE PLACE	$\pm .01$
TWO PLACES	$\pm .01$	TWO PLACES	$\pm .001$
THREE PLACES	$\pm .001$	THREE PLACES	$\pm .0001$

DESIGN UNITS ☐ SI METRIC ☒ US CUSTOMARY

WEIGHT .076 LB

CATALOG LISTING

BZ-RW82051-A2

M

4

REVISIONS

A	CO-73287-J	JAL	22 NOV 93
B	CO-75204B	JWB	1 FEB 94
C	203155	CSL	24 MAY 01

CHECK

11 NOV 82

11 NOV 82

11 NOV 82

11 NOV 82

11 NOV 82

11 NOV 82

11 NOV 82

11 NOV 82

11 NOV 82

11 NOV 82

11 NOV 82

11 NOV 82

11 NOV 82

11 NOV 82

11 NOV 82

11 NOV 82

11 NOV 82

11 NOV 82

11 NOV 82

11 NOV 82

11 NOV 82

11 NOV 82

11 NOV 82

11 NOV 82

11 NOV 82

11 NOV 82

11 NOV 82

11 NOV 82

11 NOV 82

11 NOV 82

11 NOV 82

11 NOV 82

11 NOV 82

11 NOV 82

11 NOV 82

11 NOV 82

11 NOV 82

11 NOV 82

FO-32848-A

DRAWN

R J H II NOV 82

FREEPORT ILLINOIS, U. S. A
A DIVISION OF HONEYWELL
FED. MFG. CODE 81929

SWITCH-BASIC

CATALOG LISTING

BZ-RW82051-A2

BZ-RW82051-A2

M

DRAWING
NUMBER

☒

2

M

REVISIONS

A CO-
73287-J
JAL
22 NOV 93
B CO-
75204B
JWB
1 FEB 94

X74690-BZ

no. PR-11684

CHECK


CHECK

110

10

1

Q

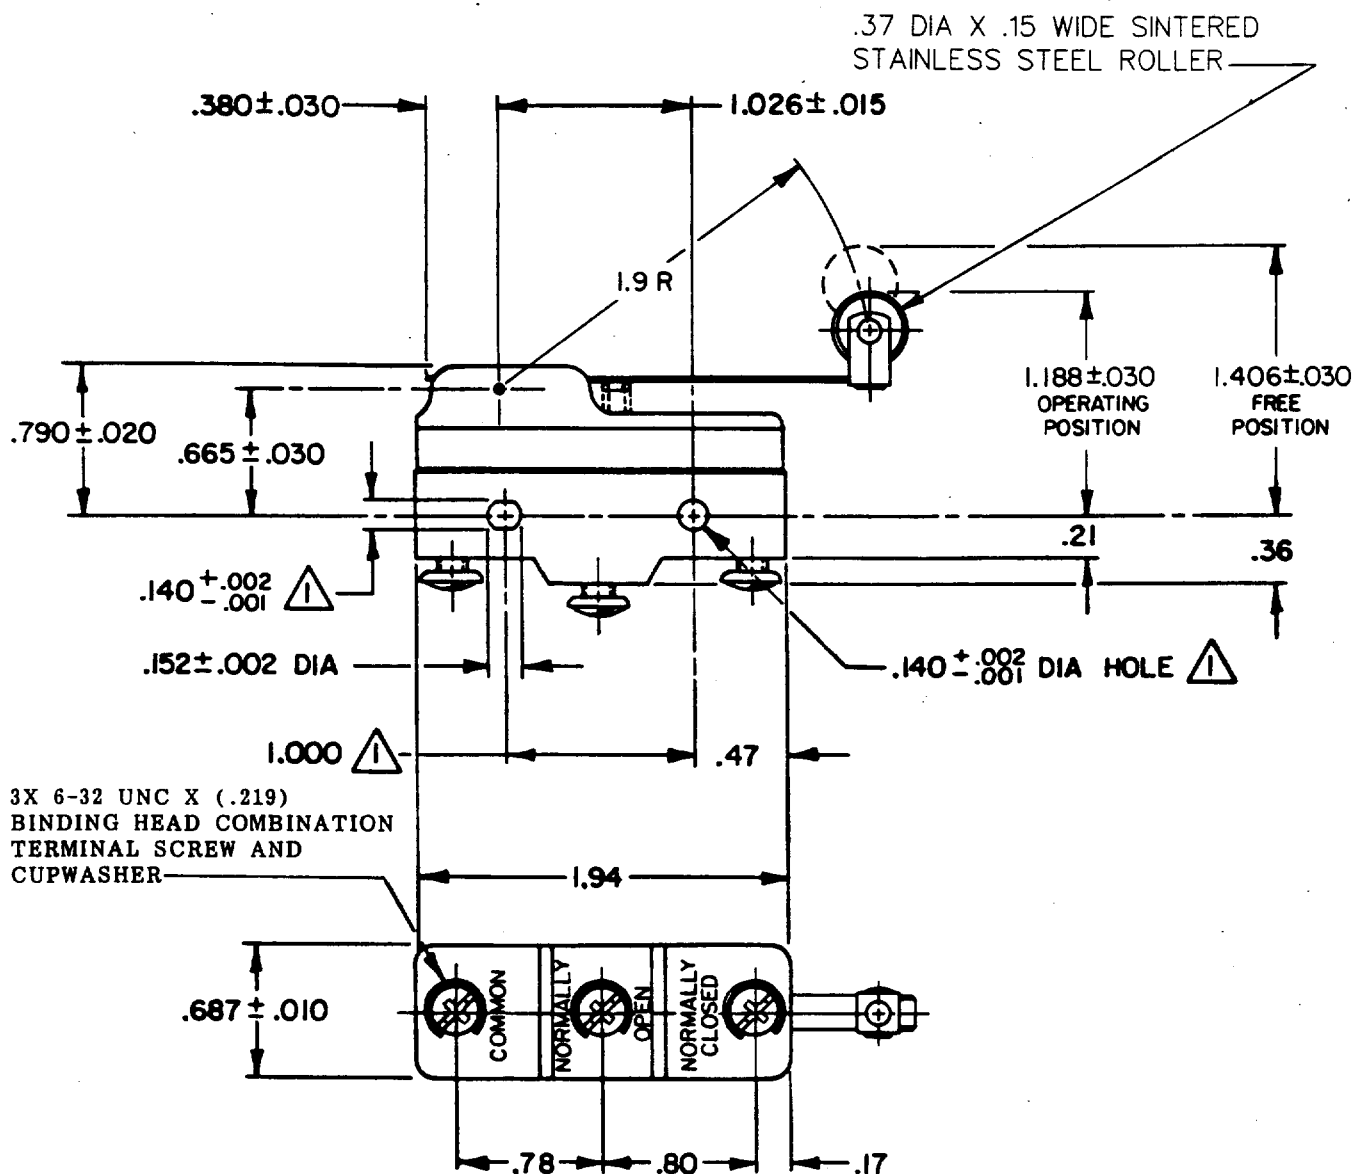


NOTE -

 - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON $1.000 \pm .002$ CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE — — — — 3 OZ MAX

RELEASE FORCE — — — — 3/4 OZ MIN

DIFFERENTIAL TRAVEL — — — .002-.015

OVERTRAVEL — — — — — .156 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

CODE L 103 15A-125, 250 OR 480 VAC
1/8HP-125 VAC; 1/4HP-250 VAC



SCALE FULL

DO NOT SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE $\pm$

	ONE.	TOL.	ONE.	TOL.
	one	one/10	10	one/10
NINE PLACES	X	1/100		
ONE PLACE	X,X	0.01/10	X,X	0.01/10
TWO PLACES	X,XX	0.10/100	X,XX	0.10/100
THREE PLACES			X,XXX	0.10/1000

DESIGN UNITS ☐ IN METRIC ☐

US CUSTOMARY

WEIGHT .076 LB

FO-52848-A