

MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY

FREDPORT, ILLINOIS

FED. MFR. CODE 91929

SWITCH - BASIC

CATALOG LISTING
BZ - RW822

CATALOG LISTING
BZ - RW822

ISSUE
12

REVISIONS

A	CO 16736 G C H 30 MAR 62
B	CO23645 M B F 23 JAN 68
C	CO46304 J A P 12 OCT 79
D	CO 58037 SMA 1 OCT 85
E	CO 70184-H G R T 2 JUN 92
F	CO- 75204B DAW 1 FEB 94
G	CO- 78874 DLT 18 NOV 94
H	CO- 94212-J J J A 5 OCT 99
J	203155 CSL 24 MAY 01

REPLACES

RELEASE NO.

CHECK

CHECK

11 APR 62


DAW

CHECK

30 MAR 62

RASTER

FO-30378

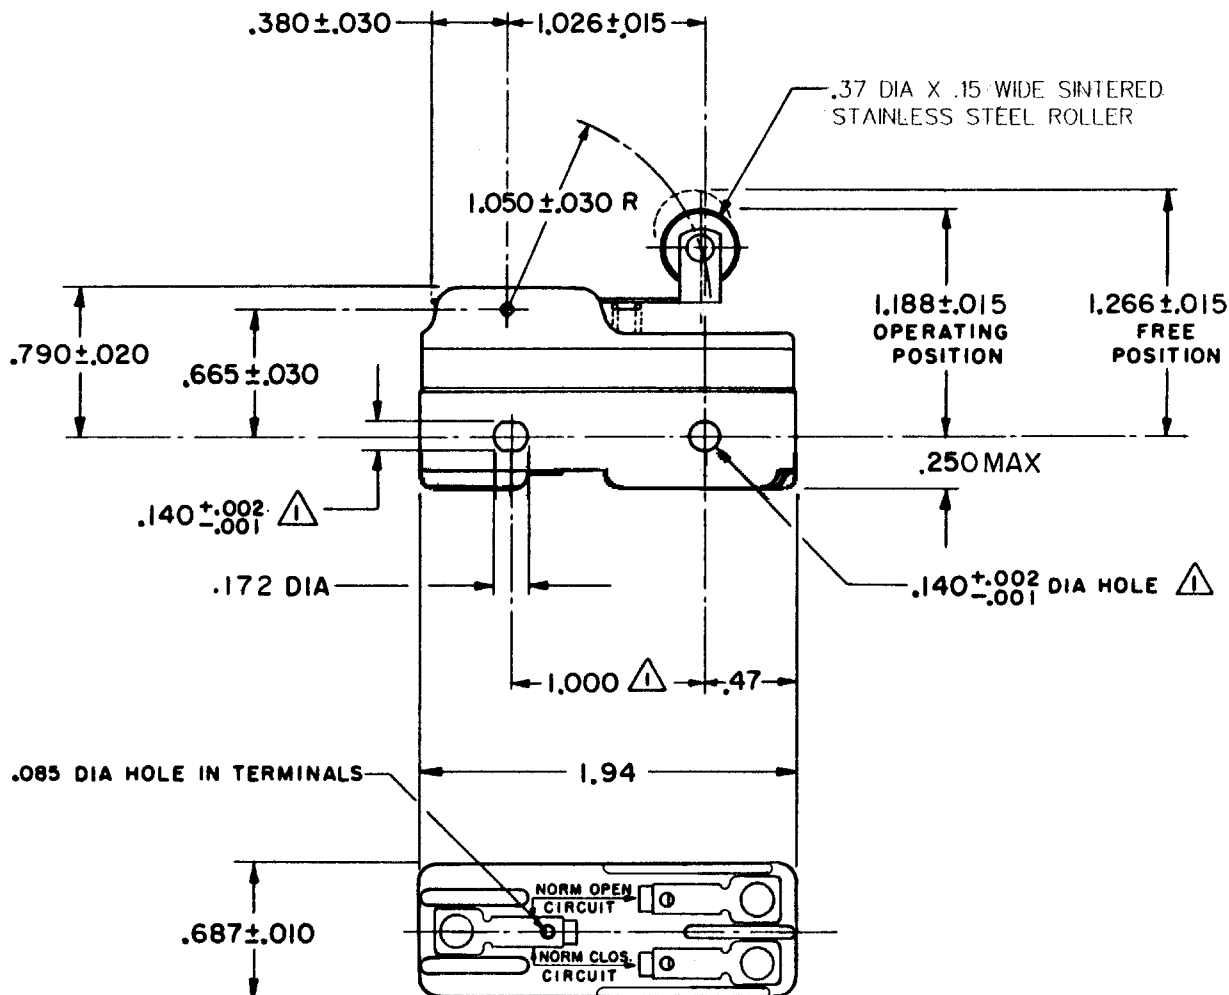

NOTE
MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX DIA ON 1.000 ± .002 CENTERS.

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE ----- 5 1/2 OZ MAX

RELEASE FORCE ----- 1 1/2 OZ MIN

DIFFERENTIAL TRAVEL ----- .001 - .006

OVERTRAVEL ----- .094 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT

S P D T

L103 15A 125, 250 OR 480 VAC
1/8HP 125 VAC, 1/4HP 250 VAC

L288
L299
L306



16A 250V ~ T85 5E4

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT .063 LB