

MICRO SWITCH

FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

BZ-RW8435149-A2

MBZ-RW8435149-A2

REPLACES

RELEASE NO. PR-14382

DRAWING
NUMBER

X 8

5

ISSUE

X 8

CHECK

REVISIONS

A	CO60882	J A S	22 JAN 87
B	CO68276	J A P	7 DEC 90
C	CO-73287-J	J A L	22 NOV 93
D	CO-82886	J A L	23 APR 96

CHECK

5 DEC 85

KAG


5 DEC 85

CHECK

3 DEC 85

G J W


DRAWN

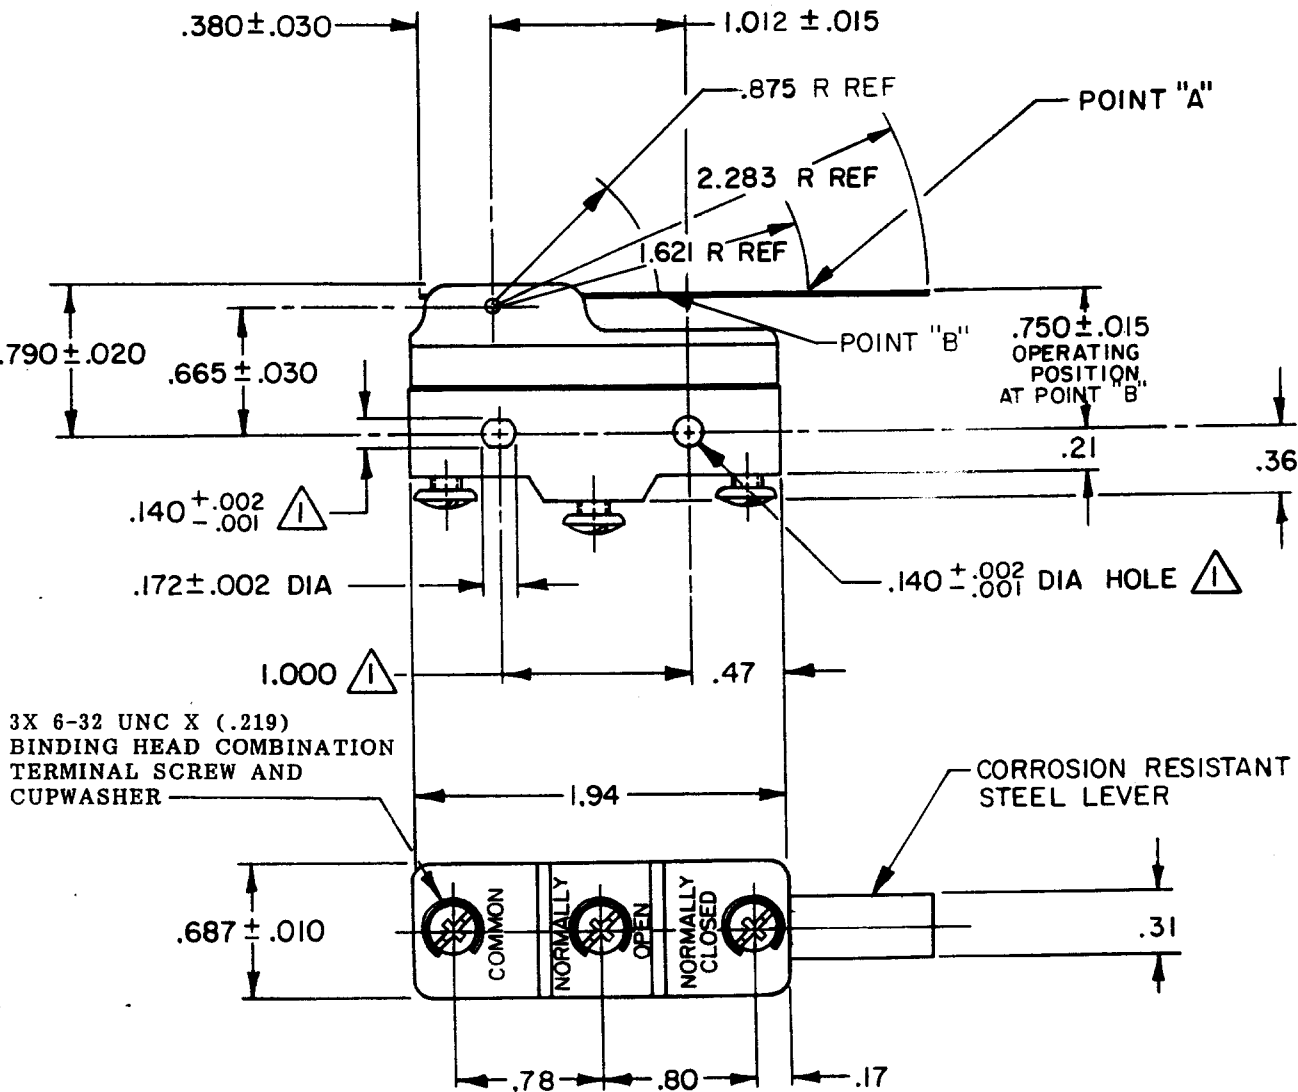

NOTE -
① - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX DIA ON 1.000 .002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS POINT "A"

OPERATING FORCE ----- 6 GRAM MAX
DIFFERENTIAL FORCE --- 1 1/2 GRAM MAX

DIFFERENTIAL TRAVEL ----- .006 MAX
OVERTRAVEL ----- .141 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

10A 125, 250, 277 VAC
1/8 HP 125 VAC, 1/4 HP 250 VAC



SCALE FULL

DO NOT SCALE PRINT

TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR
REFERENCE. UNLESS NOTED, TOLERANCES ARE 2

	DES.	TOL.	DES.	TOL.
	mm	mm/in	in	mm/in
NO PLACES	X	1/.04	X	0.01/0.03
ONE PLACE	X,X	0.4/.010	X,X	0.004/0.015
TWO PLACES	X,X,X	0.10/.002	X,X,X	0.10/.002
THREE PLACES				
ANGLES				

DESIGN UNITS ☐ SI METRIC ☒ US CUSTOMARY

WEIGHT .073 LB

FO-52848-A