

MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
PESSEY, ILLINOIS

FED. MFR. CODE 91929

SWITCH - BASIC

CATALOG LISTING

BZ - RW843515

DRAWING NUMBER
BZ - RW843515
PAGE 1 OF 1
RELEASE NO.

M

ISSUE
8

REVISIONS

A	CO 16736 GCH 18 MAY 62
B	CO34306 RER 4 DEC 75
C	CO 39569 TMM 25 OCT 77
D	CO46304 JAP 12 OCT 79
E	CO 58037 SMA 1 OCT 85
F	CO 78874 DLT 18 NOV 94
G	CO- 94212-J JJA 5 OCT 99

REPLACES

PAGE 1 OF 1

CHECK

CHECK

29 MAY 62


DAW

CHECK

18 MAY 62

GCH

DRAWN

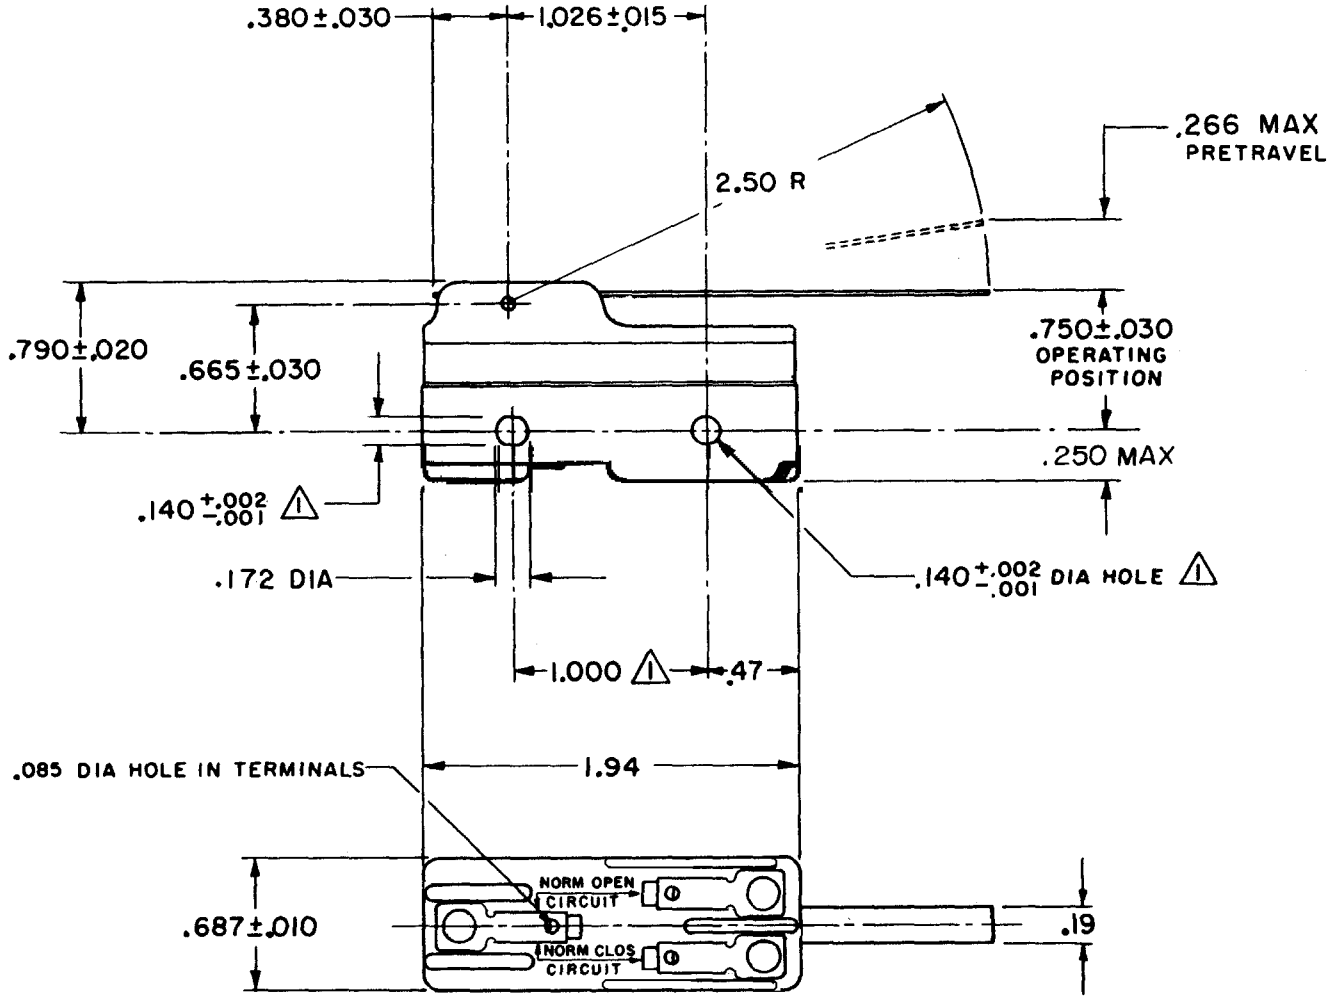

NOTE -
△ - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX DIA ON 1.000 ± .002 CENTERS.

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE ----- 1/4 OZ MAX	CONTACT ARRANGEMENT S P D T	DO NOT SCALE PRINT
DIFFERENTIAL TRAVEL ----- .003 - .015	L169 10A 125, 250, 277 VAC 1/8HP 125 VAC, 1/4HP 250 VAC	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:
OVERTRAVEL ----- .219 MIN		ONE PLACE (.0) ±.030 TWO PLACE (.00) ±.015 THREE PLACE (.000) ±.005 ANGLES ±
		WEIGHT .060 LB

FORMTEK

FO-50378