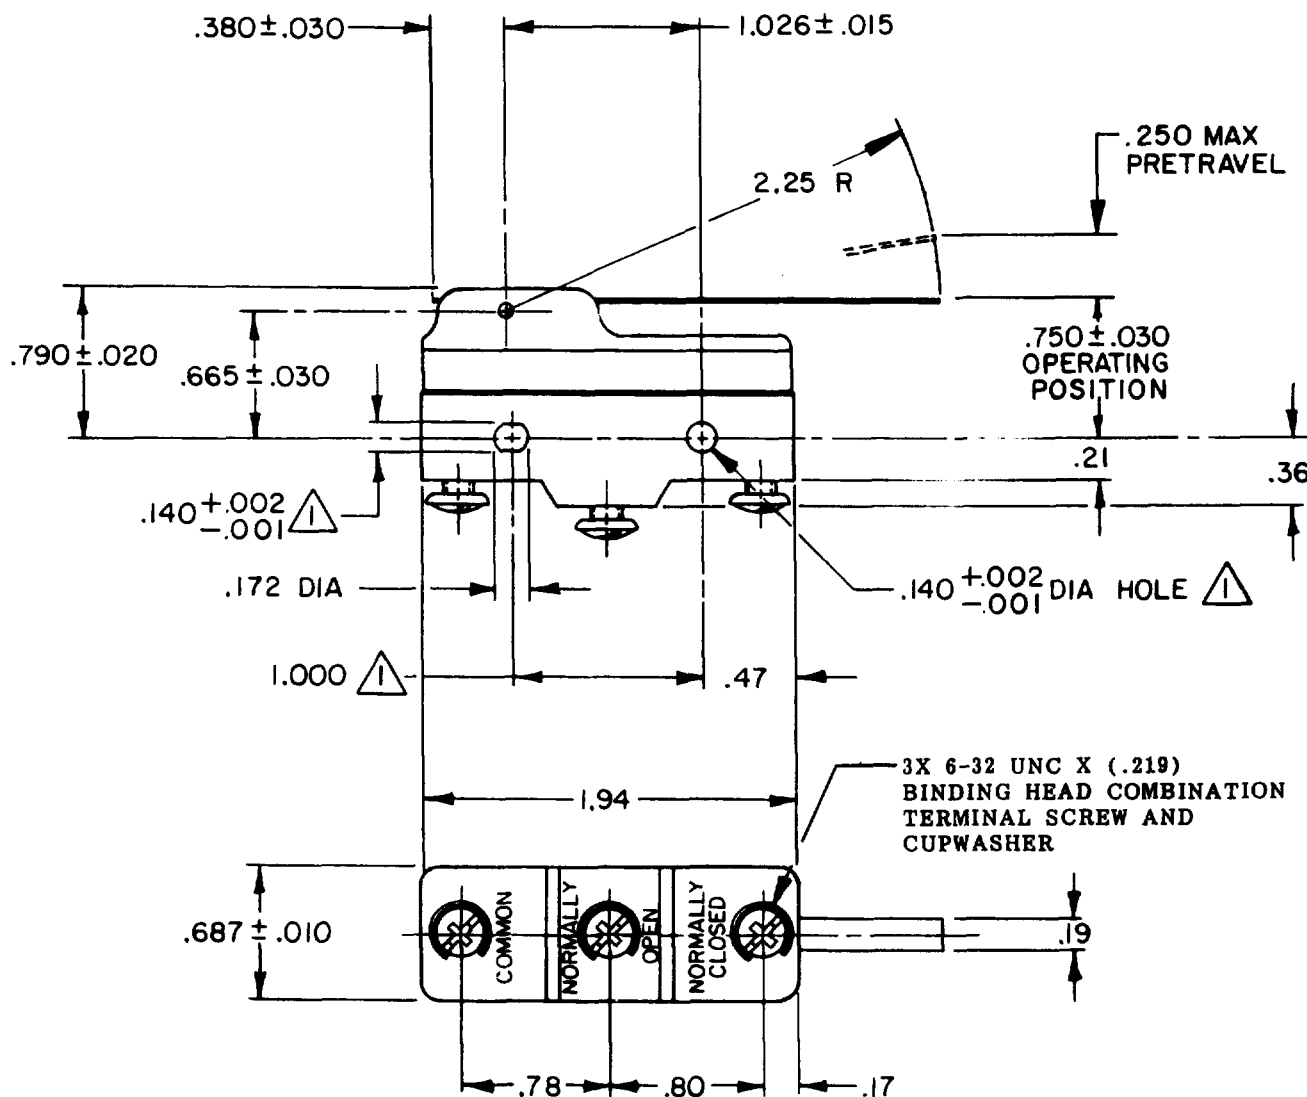


MICRO SWITCHFREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH — BASIC


CATALOG LISTING

BZ-RW8435161-A2**NOTES:**

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 DIA ON $1.000 \pm .002$ CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

**CHARACTERISTICS**

OPERATING FORCE — 7 GRAMS MAX

DIFFERENTIAL TRAVEL — .003 — .012

OVERTRAVEL — .203 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT

S P D T

L95

10A 125, 250 OR 480 VAC
1/8HP 125 VAC, 1/4HP 250 VAC

L288



SCALE FULL

DO NOT SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE 2

	DIM. mm	TOL. mm/in	DIM. in	TOL. mm/in
NO PLACES	X	1/64	X	0.01/63
ONE PLACE	X.X	0.02/818	X.X	0.001/63
TWO PLACES	X.XX	0.001/63	X.XX	0.0001/63
THREE PLACES	X.XXX	0.0001/63	X.XXX	0.00001/63
ANGLES				

DESIGN UNITS ☐ SI METRIC ☐ US CUSTOMARY

WEIGHT .073 LB

CATALOG LISTING
BZ-RW8435161-A2

PAGE 1 OF 1

MISSUE
5

REVISIONS

A	C064626	JJA	16 JUN 89
B	CO-73287-J	JAL	22 NOV 93
C	CO-77589	MAM	29 MAR 94
D	203222	CSL	6 JUN 01

CHECK

CHECK

RASTER
FO-52848-A

DRAWN

REPLACES X89225-BZ

RELEASE NO. RR-16777

CHECK

CHECK

CHECK

J A P 24 SEPT 88

MICRO SWITCHFREEPORT ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929**SWITCH — BASIC**

CATALOG LISTING

BZ-RW8435161-A2**M BZ-RW8435161-A2**

REPLACES X89225-BZ

RELEASE NO. PR-16777

DRAWING
NUMBER

X8

ISSUE

X4

CHECK

REVISIONS

A C064626

YJA

16 JUN 89

B CO-

73287-J

JAL

22 NOV 93


C CO-

77589

MAM

29 MAR 94

CHECK

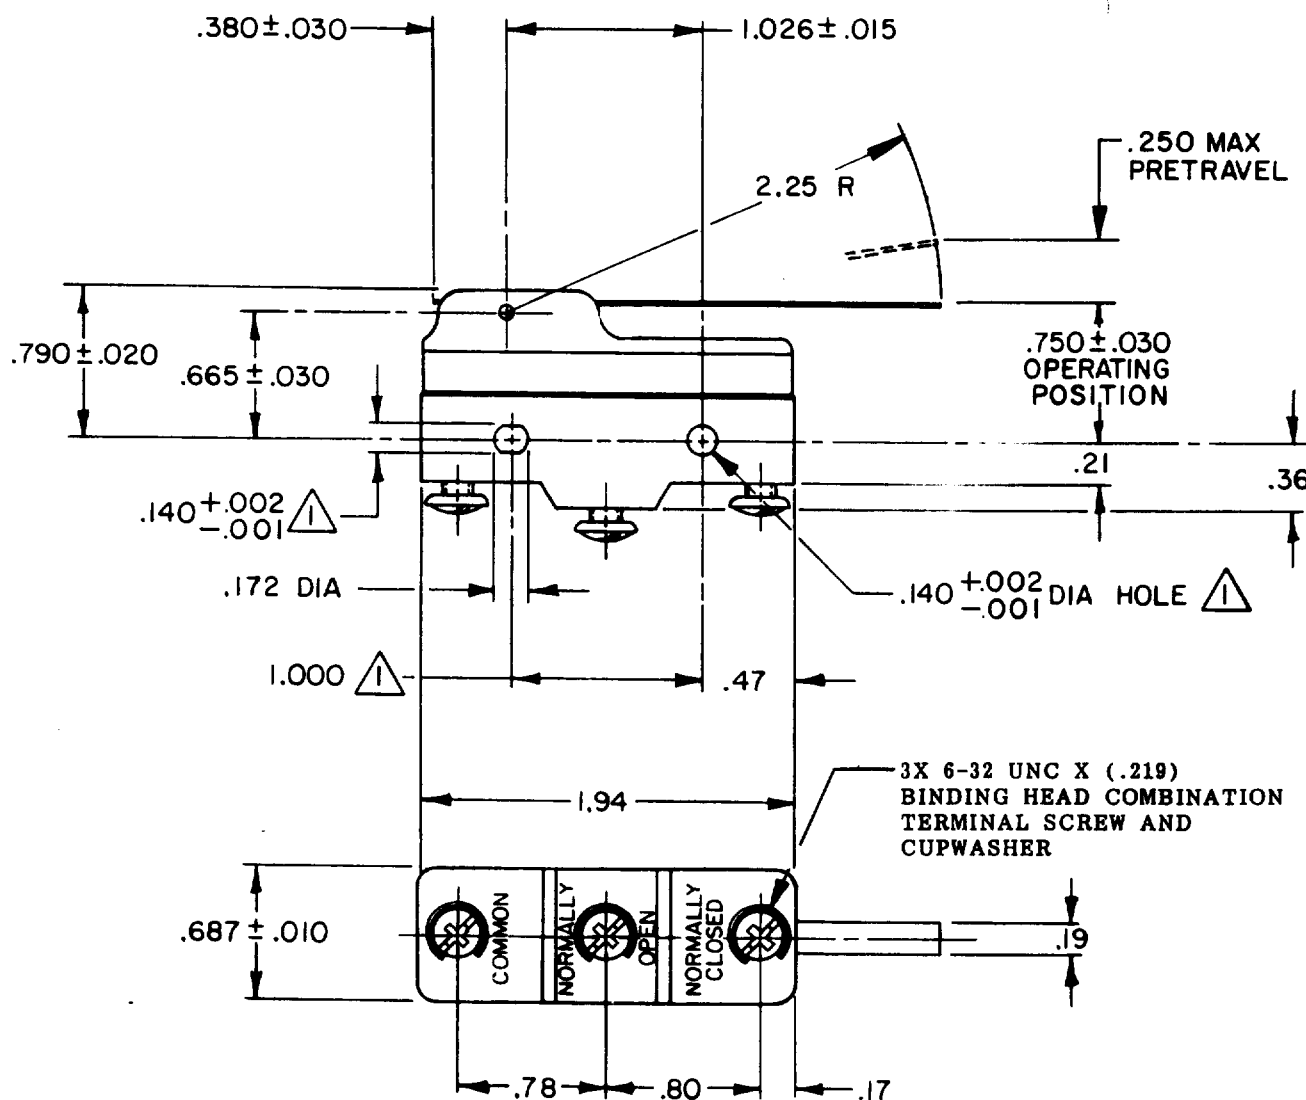


NOTES:

- ① MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 DIA ON 1.000 ± .002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

**CHARACTERISTICS**

OPERATING FORCE — 7 GRAMS MAX

DIFFERENTIAL TRAVEL — .003 — .012

OVERTRAVEL — .203 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT

S P D T

10A 125, 250 OR 480 VAC
1/8 HP 125 VAC, 1/4 HP 250 VAC



SCALE FULL

DO NOT SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

	DIM. in	TOL. mm/in	DIM. in	TOL. mm/in
NO PLACES	X	1/.04	X	0.07/0.03
ONE PLACE	X,X	0.47/.010	X,X	0.38/.015
TWO PLACES	X,X,X	0.10/.000	X,X,X	0.13/.000
THREE PLACES				

DESIGN UNITS ☐ SI METRICUS CUSTOMARY ☐

WEIGHT .073 LB

FO-52848-A

DRAWN

J A P 24 SEPT 88 CHECK