

MICRO SWITCHFREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL INC.
FED. MFG. CODE 91929**SWITCH - BASIC**

CATALOG LISTING

BZ-RW8435164-A2CATALOG LISTING
BZ-RW8435164-A2
PAGE 1 OF 1ISSUE
M
6

RELEASE NO. PR-17860 REPLACES X90392-BZ

REVISIONS

A	CO70499	JWB	10 JUL 91
B	CO-73287-J	JAL	22 NOV 93
C	CO-77589	MAM	29 MAR 94
D	CO-82886	JALA	23 APR 96
E	203222	CSL	6 JUN 01

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK


CHECK

CHECK

CHECK

CHECK

CHECK

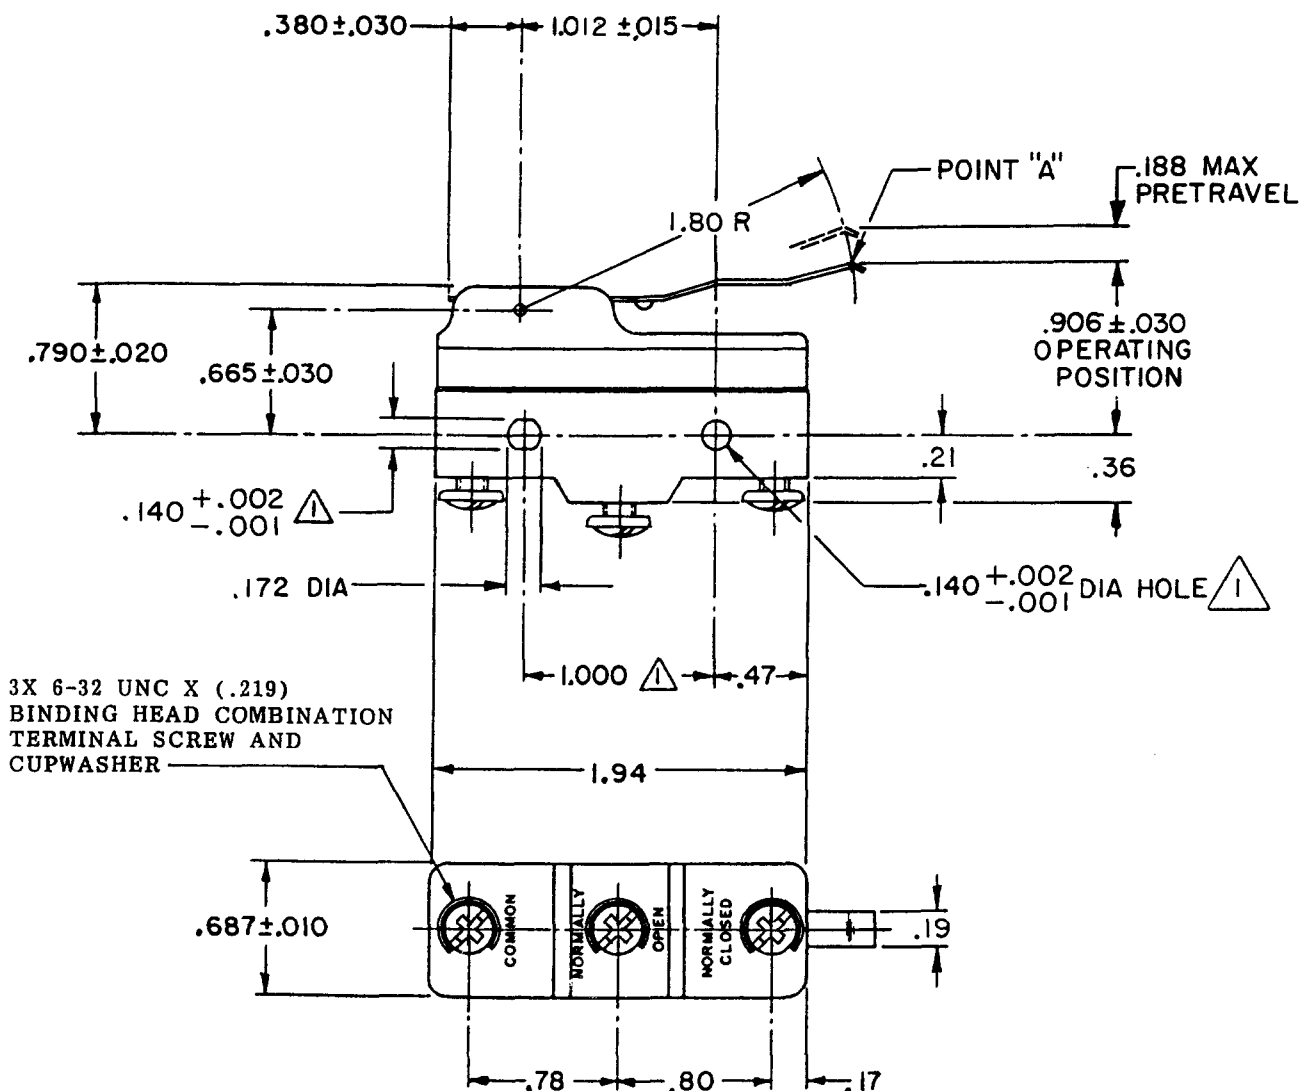


NOTE -

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ± .002 CENTERS
- 2 OPERATING FORCE MEASURED WITH SWITCH IN VERTICAL POSITION WITH LEVER DOWNWARD

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

**CHARACTERISTICS** 2

OPERATING FORCE — 8 1/2 GRAM MAX

DIFFERENTIAL TRAVEL — .003—.010

OVERTRAVEL — .156 MIN

ELECTRICAL DATACONTACT ARRANGEMENT
S P D TL95
10A 125, 250 OR 480 VAC
1/8HP 125 VAC, 1/4HP 250 VAC

L288



SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE

ONE PLACE (.0) ± .030

TWO PLACE (.00) ± .015

THREE PLACE (.000) ± .006

ANGLES ±

RAW MATERIAL - COMMERCIAL STANDARD

DIMENSIONS ARE IN INCHES AND ARE
TO BE MET BEFORE PROTECTIVE
COATINGS ARE APPLIED

MICRO SWITCH STANDARDS APPLY

WEIGHT .073 LB

RASTER

FO-52848-B

DRAWN

J A P 127 DEC 89

MICRO SWITCH

FREEPORT ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL INC.
FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

BZ-RW8435164-A2

BZ-RW8435164-A2

M

DRAWING
NUMBER

ISSUE

2

5

8

REPLACES X90392-BZ

PR-17860

CHECK

REVISIONS

A	CO7049 S	JWB	10 JUL 91
B	CO-73287-J	JAL	22 NOV 93
C	CO-77589	MAM	29 MAR 94
D	CO-82886	JALA	23 APR 96

CHECK

30 DEC '89

DAW

89

DEC 89


DEC 89

DEC 89

DEC 89

DEC 89

DEC 89

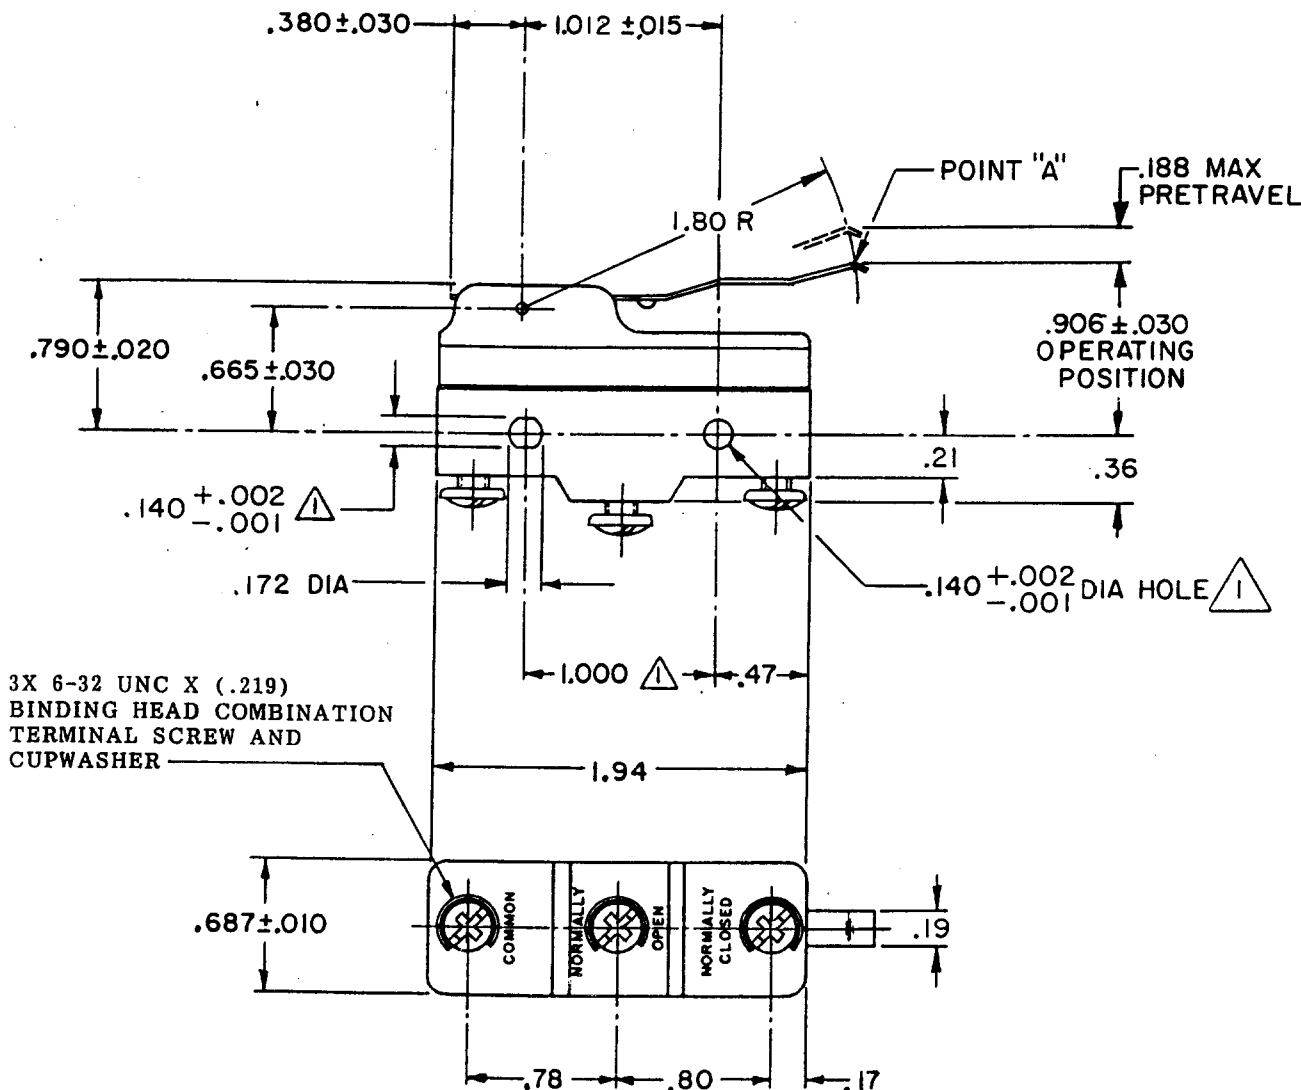


NOTE -

- MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ± .002 CENTERS
- OPERATING FORCE MEASURED WITH SWITCH IN VERTICAL POSITION WITH LEVER DOWNWARD

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS 2

OPERATING FORCE — 8 1/2 GRAM MAX

DIFFERENTIAL TRAVEL — .003 — .010
OVERTRAVEL — .156 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L95
10A 125, 250 OR 480 VAC
1/8 HP 125 VAC, 1/4 HP 250 VAC



SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE (.0) ± .030
TWO PLACE (.00) ± .015
THREE PLACE (.000) ± .005

ANGLES ±

RAW MATERIAL — COMMERCIAL STANDARD

DIMENSIONS ARE IN INCHES AND ARE TO BE MET BEFORE PROTECTIVE COATINGS ARE APPLIED

MICRO SWITCH STANDARDS APPLY

WEIGHT .073 LB

FO-52848-S

DRAWN

J A P 27 DEC 89