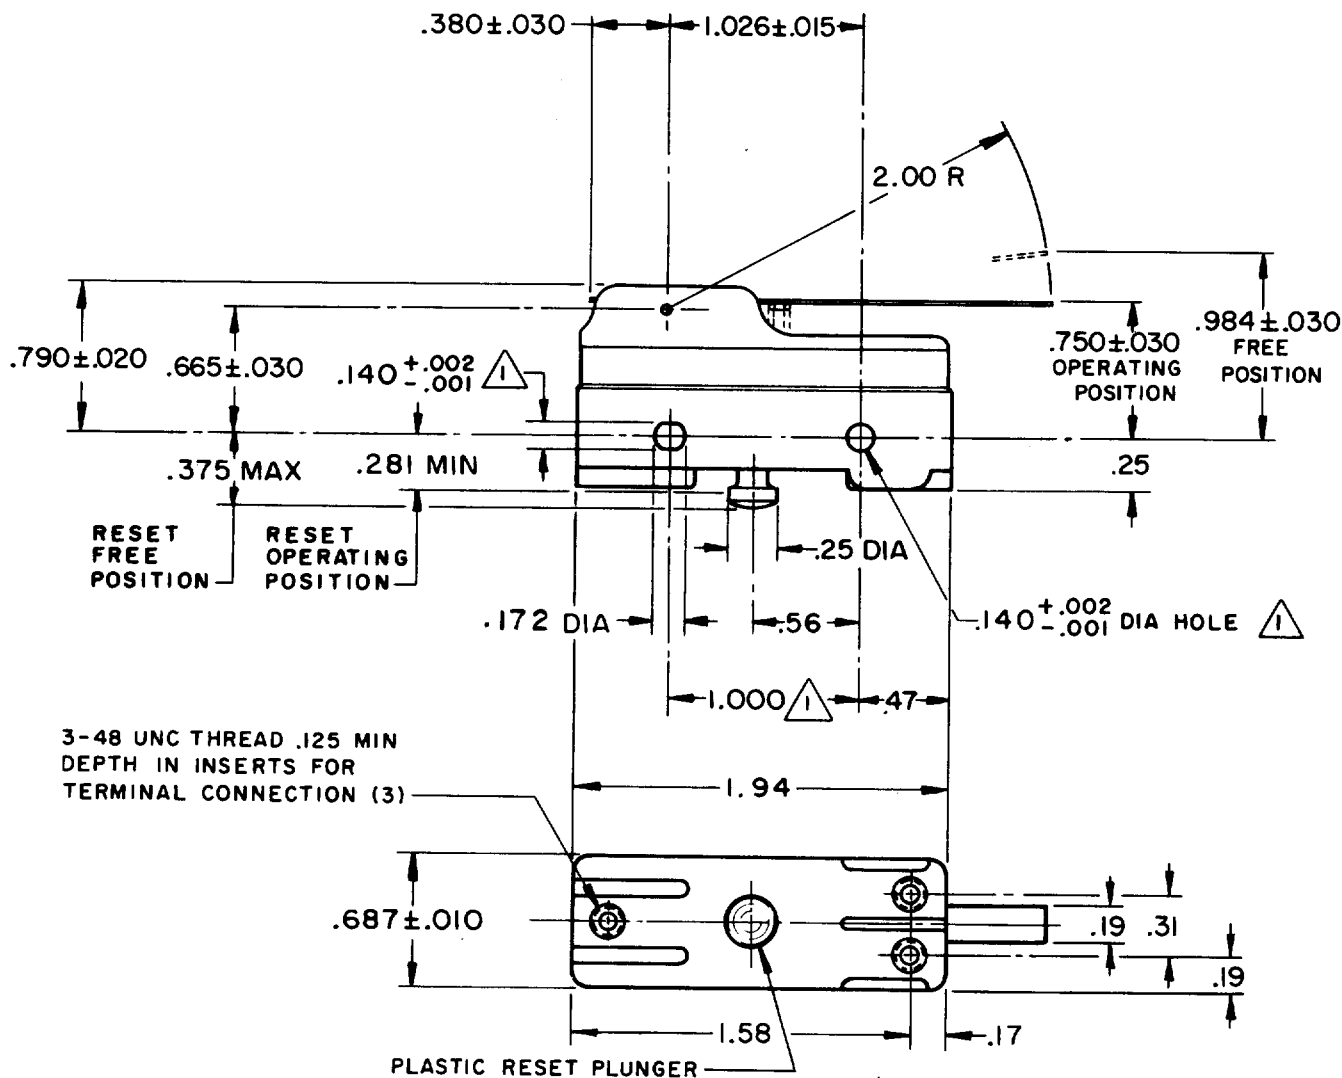


**MICRO SWITCH**FREEPORT, ILLINOIS, U. S. A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

BZ-RW85X2**NOTE-**

△ MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX DIA ON $1.000 \pm .002$ CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE — — — — — 3 OZ MAX
OVERTRAVEL — — — — — .172 MIN

RESET CHARACTERISTICS

OPERATING FORCE — — — — — 2-10 OZ
OVERTRAVEL — — — — — .015 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
SINGLE POLE-DOUBLE THROW-MAINTAINED CONTACT

UNDERWRITERS' LAB. INC. LISTED RATING
-L67- 15 A-125, 250, OR 480 VAC
1/4 HP-125 VAC; 1/2 HP-250 VAC
1/2 A-125 VDC; 1/4 A-250 VDC

**SCALE FULL****DO NOT SCALE PRINT****UNLESS OTHERWISE
NOTED****DIMENSIONS ARE IN INCHES****TOLERANCES ARE:**

ONE PLACE	(.0)	$\pm .030$
TWO PLACE	(.00)	$\pm .015$
THREE PLACE	(.000)	$\pm .005$
ANGLES		$\pm$

WEIGHT**BZ-RW85X2****DRAWING
NUMBER****ISSUE****2****REVISIONS**

A C077590
DLT
10 JUN 94

REPLACES

RELEASE NO. PR-714

CHECK

CHECK

17 MAY 69

D.C.S.

CHECK

69

14 MAY

O.M.W.

FO-50378-004