

MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
PINEBROOK, ILLINOIS

FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

BZ - RX

BZ - RX
ISSUE 10

REPLACES

RELEASE NO.

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

BZ - RX

M


DRAWING
NUMBER

ISSUE

13

REVISIONS

A	CO	16325	GCH	19 JAN 62
B	CO	34307	DLH	19 JAN 76
C	CO	77590	DLT	9 JUN 94

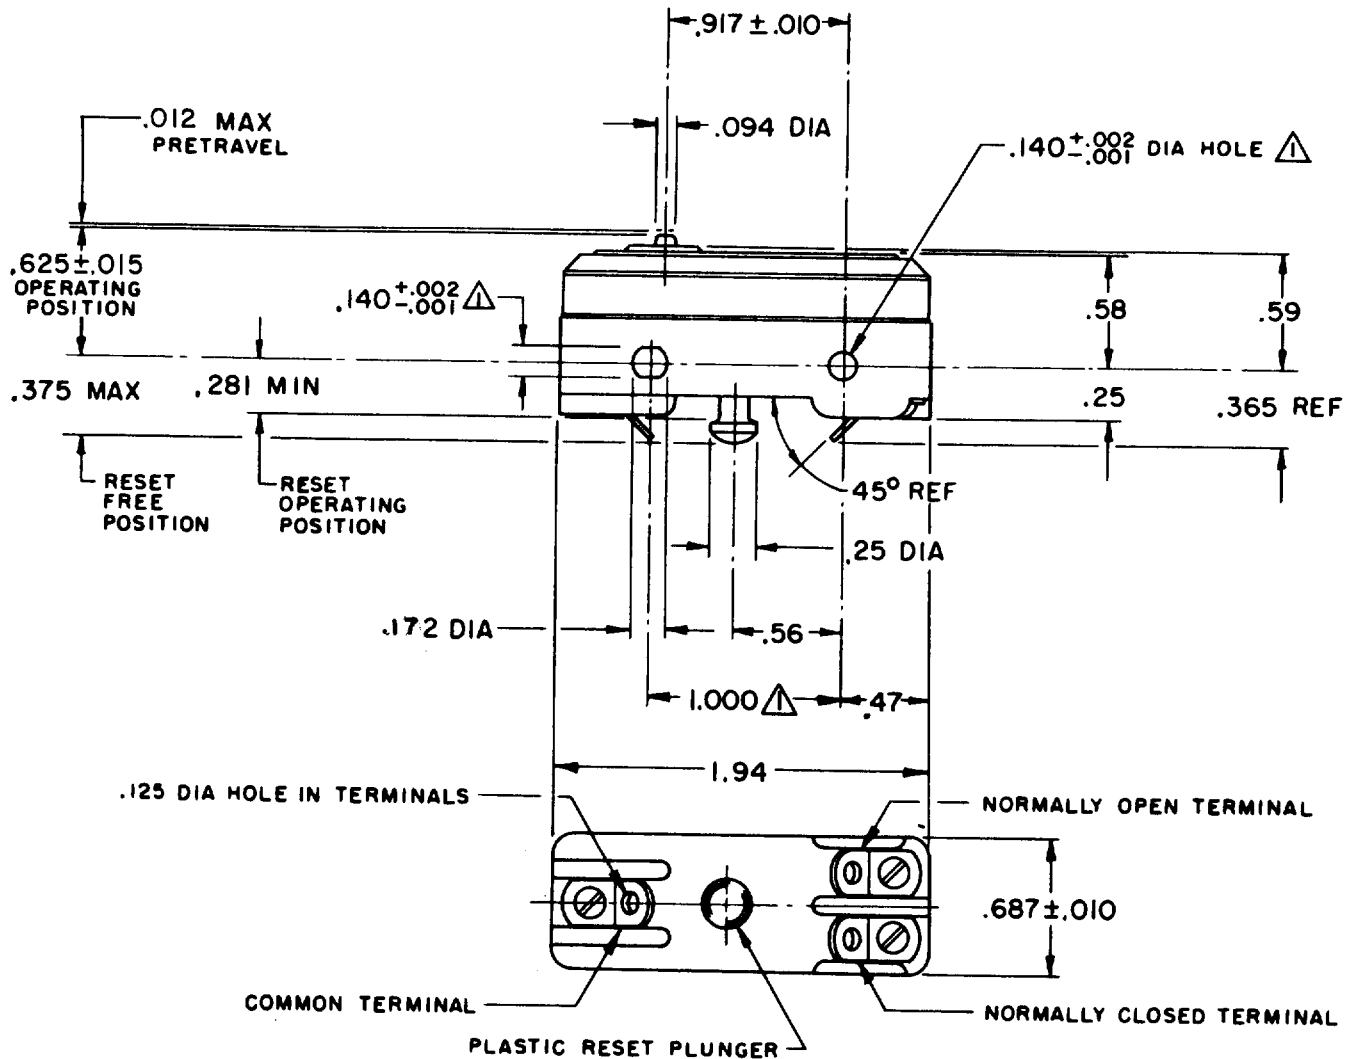

NOTE -

△ - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX DIA ON 1.000 ± .002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE ----- 7-9 OZ
OVERTRAVEL ----- .005 MIN

RESET CHARACTERISTICS

OPERATING FORCE ----- 2-10 OZ
OVERTRAVEL ----- .015 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
SINGLE POLE DOUBLE THROW
MAINTAINED CONTACT

BREAK DISTANCE

UNDERWRITERS' LAB. INC. LISTED RATING
15 A-125, 250, OR 480 VAC
-L 67- 1/4 HP-125 VAC; 1/2 HP-250 VAC
1/2 A-125 VDC; 1/4 A-250 VDC



SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
ONE PLACE (.0) ± .030
TWO PLACE (.00) ± .015
THREE PLACE (.000) ± .005
ANGLES ±

WEIGHT .055 LB