

BZ-RX122

CATALOG LISTING

PAGE 1 OF 1

REPLACES

PR-5286

RELEASE NO.

CHECK

CHECK


CHECK

GR T 27 MAR 98

FORMTEK


DRAWN

REVISIONS	
A	CO 92530
	GRT 27 MAR 98
B	207078
	JAH 18 DEC 02

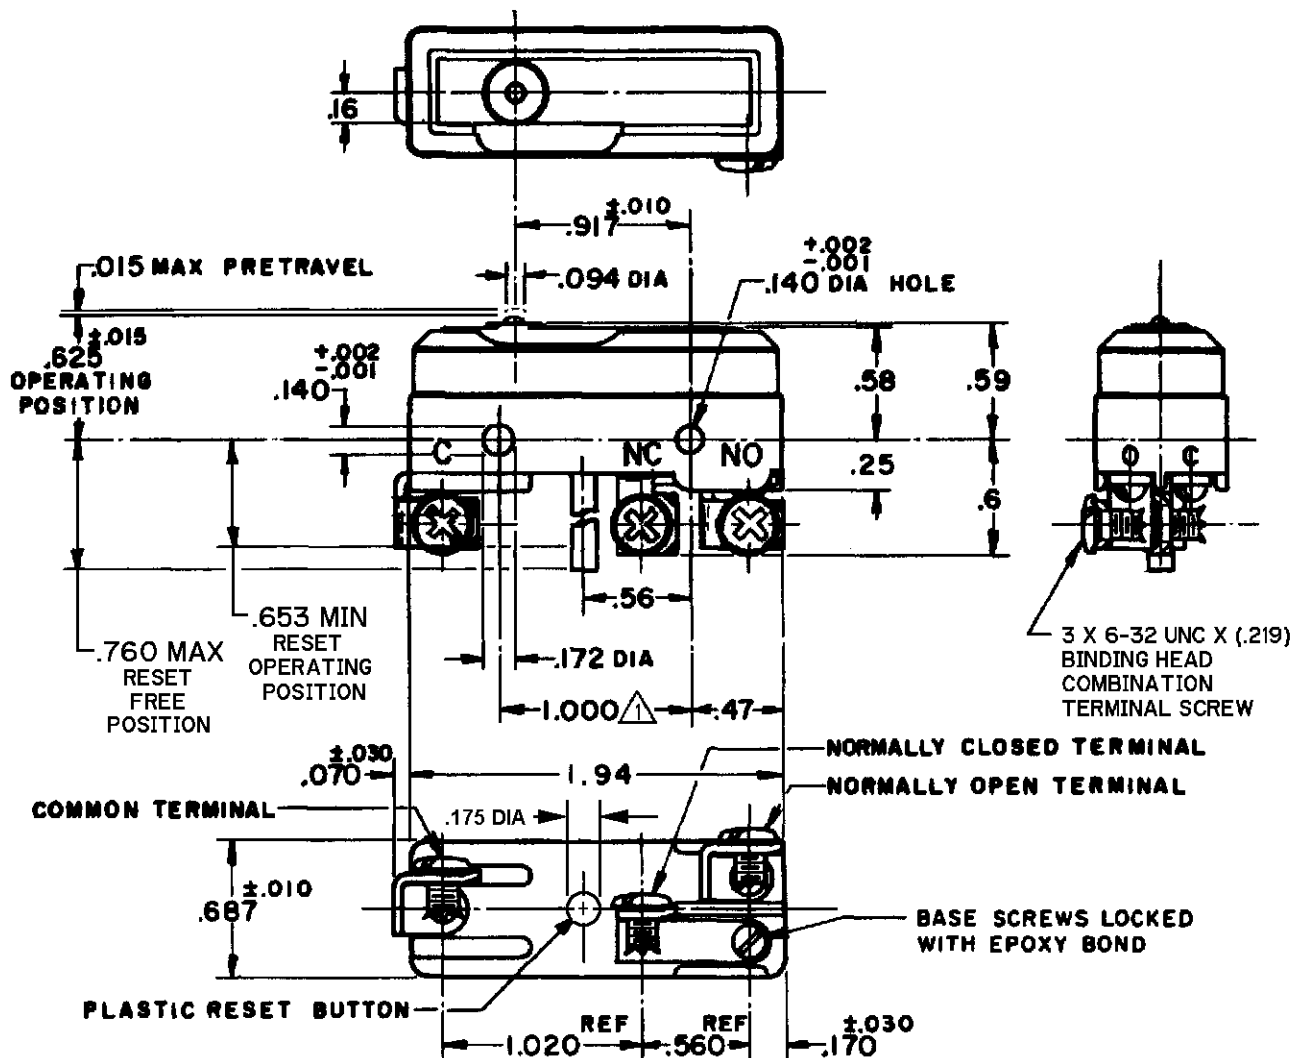

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE ----- 7-10 OZ
OVERTRAVEL ----- .005 MIN

RESET CHARACTERISTICS

OPERATING FORCE ----- 5-10 OZ
OVERTRAVEL ----- .015 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T MAINTAINED CONTACT

L144 15A 125, 250 OR 480 VAC
1/4HP 125 VAC, 1/2HP 250 VAC
1/2A 125 VDC, 1/4A 250 VDC
2A 600 VAC



SCALE FULL

DO NOT
SCALE PRINT

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE

ONE PLACE (.0) ±.030

TWO PLACE (.00) ±.015

THREE PLACE (.000) ±.005

ANGLES ±

WEIGHT