

FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING
BZ-RX20

BZ-RX20

M

DRAWING
NUMBER

ISSUE 2

REPLACES

RELEASE NO. PR 6564

CHECK

CHECK

CEB

CHECK


227

24 JUL

MM

FO-52848-A

DRAWN

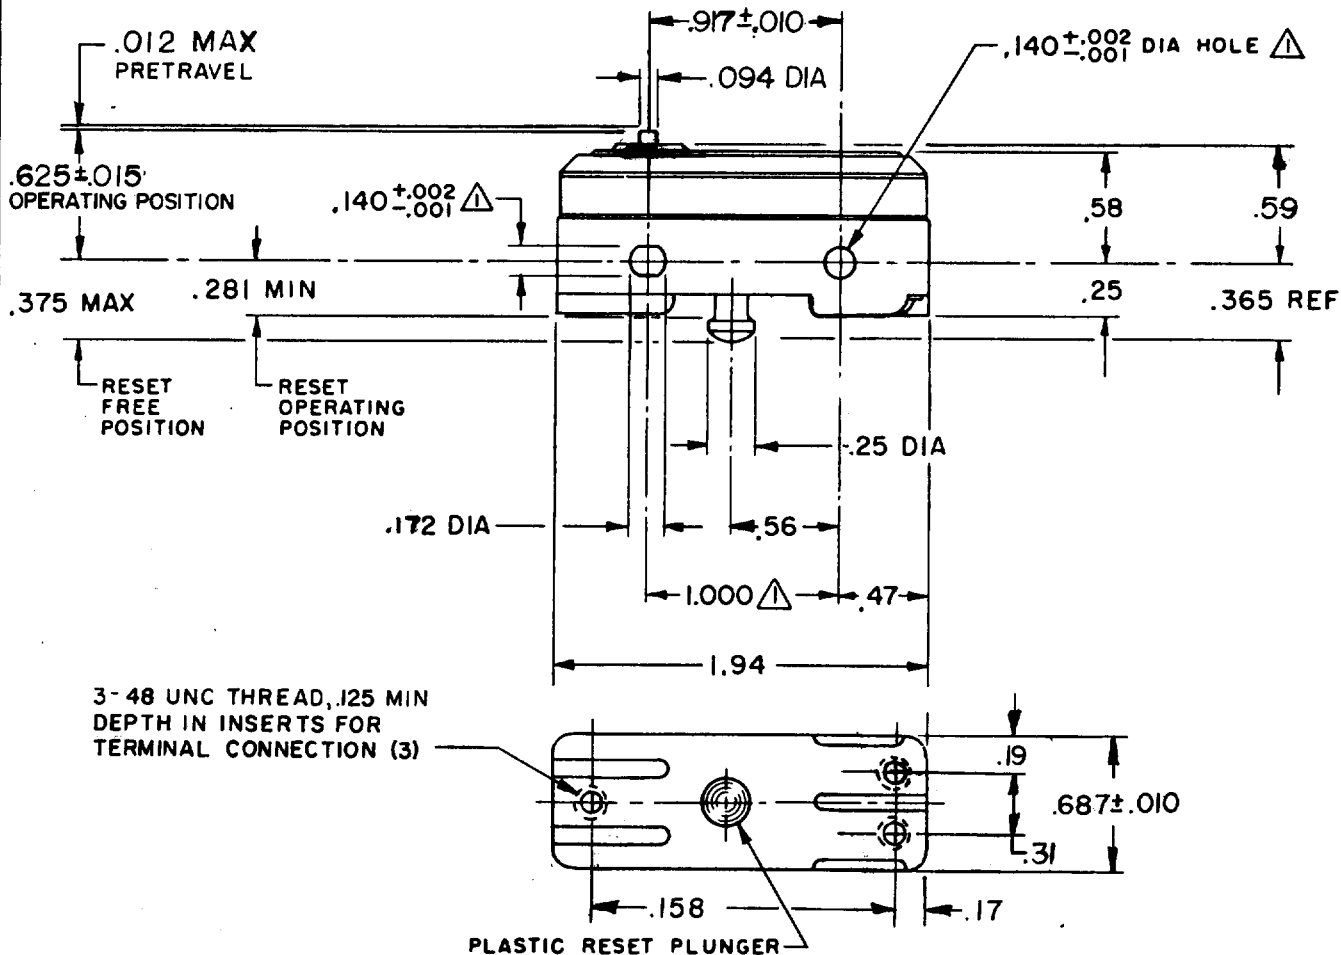


NOTE -

① - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON $1.000 \pm .002$ CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE-----7-9 OZ
OVERTRAVEL-----005 MIN

RESET CHARACTERISTICS

OPERATING FORCE----- 2-10 OZ
OVERTRAVEL----- 0.15 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
SPDT MAINTAINED CONTACT

UL LISTED - FILE E12252
CODE L67 15A-125, 250 OR 480 VAC
1/4HP-125 VAC; 1/2HP-250 VAC
1/2A-125 VDC; 1/4A-250 VDC



SCALE FULL

DO NOT SCALE PRINT

TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR
REFERENCE UNLESS NOTED. TOLERANCES ARE $\pm$

	DIM. mm	TOL. mm/in	DIM. in	TOL. mm/in
NO PLACES	X	1/04		
ONE PLACE	X,X	0.4/016	X,X	0.8/03
TWO PLACES	X,X,X	0.15/006	X,X,X	0.38/015
THREE PLACES			X,X,X,X	0.13/005
ANGLES				

DESIGN UNITS ☐ SI METRIC ☐

WEIGHT .055 LB