

**MICRO SWITCH**FREEPORT ILLINOIS
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929**SWITCH-BASIC**CATALOG LISTING
BZ-RX43**BZ-RX43****M**DRAWING
NUMBER

4

ISSUE

REPLACES

RELEASE NO. SR 10763

CHECK

CHECK

BCH 1 FEB 63

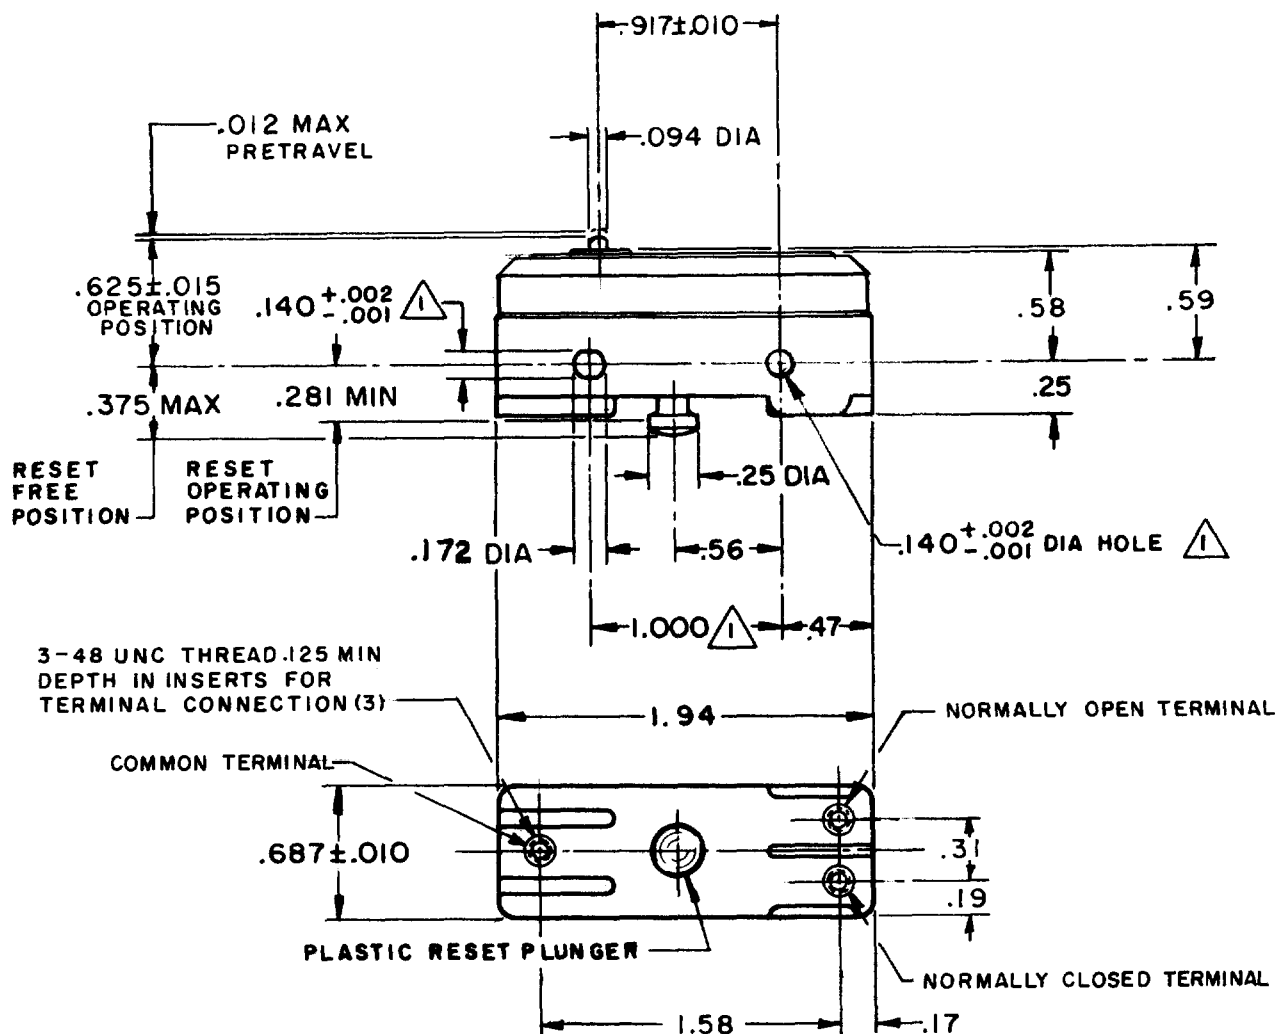
CHECK

1 FEB 63

MBF

DRAWN

FORMTEK

**NOTE-**

⚠ MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX DIA ON 1.000 ± .002 CENTERS
2-3-48 UNC X .125 REF TERMINAL SCREW FURNISHED UNASSEMBLED (3)

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE ——— 7-9 OZ
OVERTRAVEL ——— .005 MIN

RESET CHARACTERISTICS

OPERATING FORCE ——— 2-10 OZ
OVERTRAVEL ——— .015 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
SINGLE POLE DOUBLE THROW
MAINTAINED CONTACT

BREAK DISTANCE

UNDERWRITERS' LAB. INC. LISTED RATING
-L67- 15 A-125, 250, OR 480 VAC
1/4 HP-125 VAC; 1/2 HP-250 VAC
1/2 A-125 VDC; 1/4 A-250 VDC

**SCALE FULL**

DO NOT SCALE PRINT

UNLESS OTHERWISE
SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

ONE PLACE (.0) ±.030
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.005
ANGLES ±

WEIGHT .055 LB