


MICRO SWITCH

FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

BZ-RX47

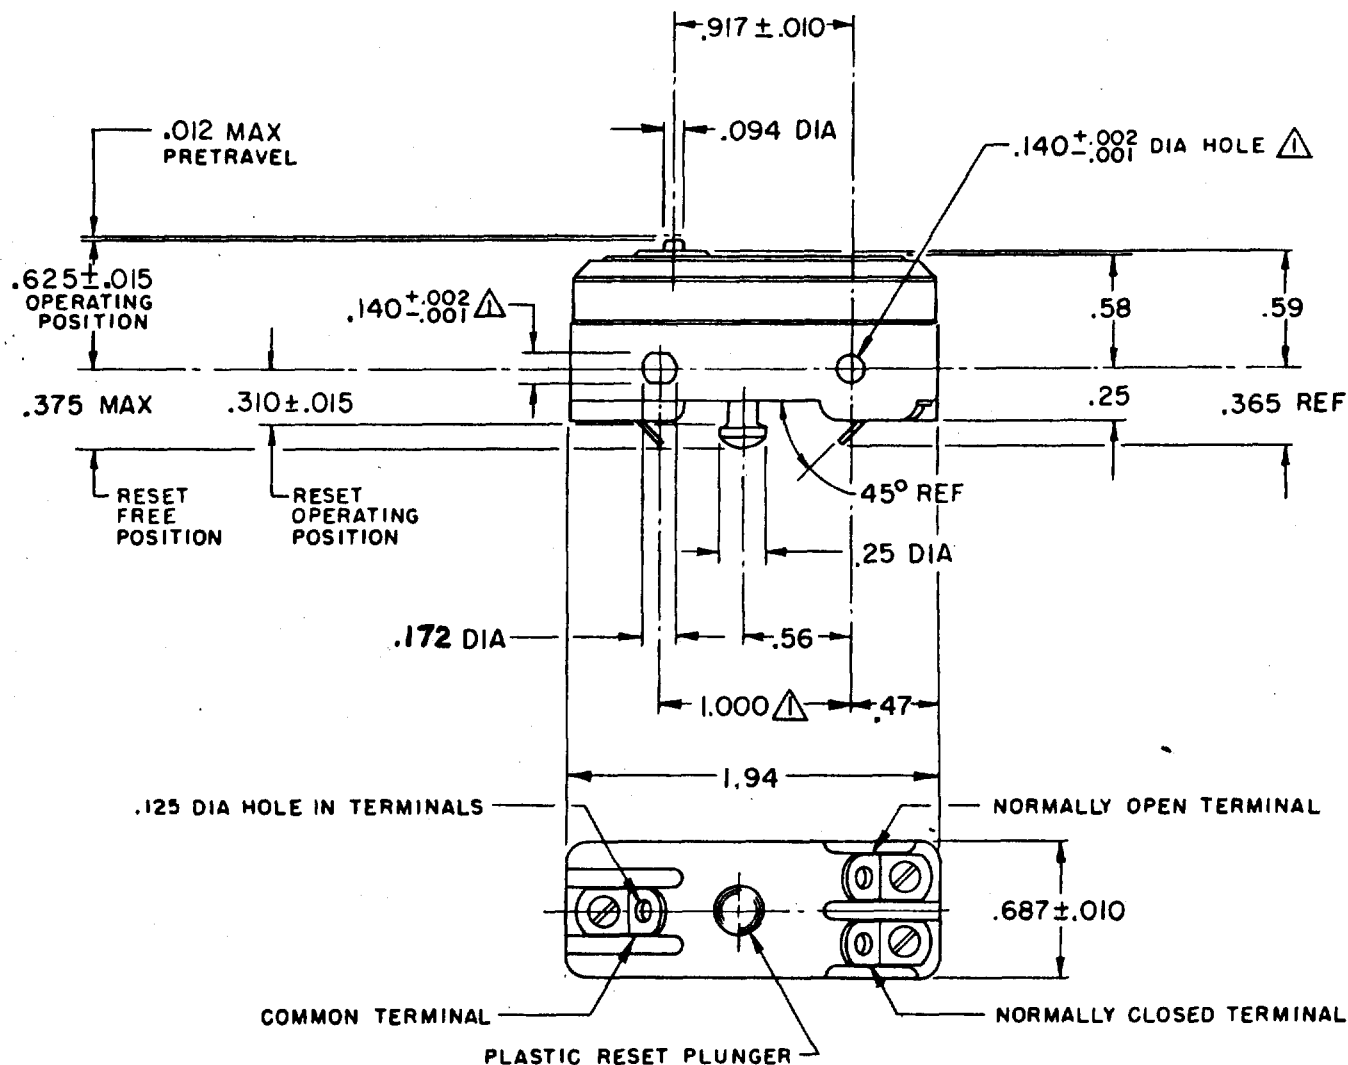

NOTE -
△ - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX DIA ON 1.000 ± .002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

CHARACTERISTICS

OPERATING FORCE - - - 18 - 30 OZ
OVERTRAVEL - - - - - .005 MIN

RESET CHARACTERISTICS

OPERATING FORCE - - - - 6 OZ MIN
OVERTRAVEL - - - - - .015 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
SINGLE POLE DOUBLE THROW
MAINTAINED CONTACT

UL LISTED - FILE E12252
CODE L144 15A-125, 250, 480VAC
1/4HP-125VAC; 1/2HP-250VAC; 2A-600VAC
1/2A-125VDC; 1/4A-250VDC



SCALE FULL

DO NOT SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR
REFERENCE UNLESS NOTED. TOLERANCES ARE ±

DIM.	TOL.	DIM.	TOL.
mm	mm/in	in	mm/in
NO PLACES	X	1/64	X, X
ONE PLACE	X, X	0.016	X, X, X
TWO PLACES	X, X, X	0.0005	X, X, X, X
THREE PLACES	X, X, X, X		
ANGLES			

SI METRIC
DESIGN UNITS ☐

US CUSTOMARY
☒

WEIGHT .055 LB

BZ-RX47

M

DRAWING
NUMBER

ISSUE

5

REPLACES

RELEASE NO. PR-6254

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

FO-52848-A

DRAWN

DEC 76

DEC 76

DEC 76

DEC 76

DEC 76

DEC 76

DEC 76

DEC 76

DEC 76

DEC 76

DEC 76

DEC 76

DEC 76

DEC 76

DEC 76

DEC 76

DEC 76

DEC 76

DEC 76

DEC 76

DEC 76

DEC 76

DEC 76

DEC 76

DEC 76

DEC 76

DEC 76

DEC 76

DEC 76

DEC 76

DEC 76

DEC 76

DEC 76

DEC 76

DEC 76

DEC 76

DEC 76

DEC 76

DEC 76

DEC 76

DEC 76

DEC 76

DEC 76

DEC 76

DEC 76

DEC 76