

MICRO SWITCH

FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

BZ-RX48

BZ-RX48

M

DRAWING
NUMBER

X 2

ISSUE

X 4

REPLACES X60313-BZ

RELEASE NO. PR-3722

CHECK

CHECK


4 DEC 73

LS D

NOV 73

FO-52848

DRAWN

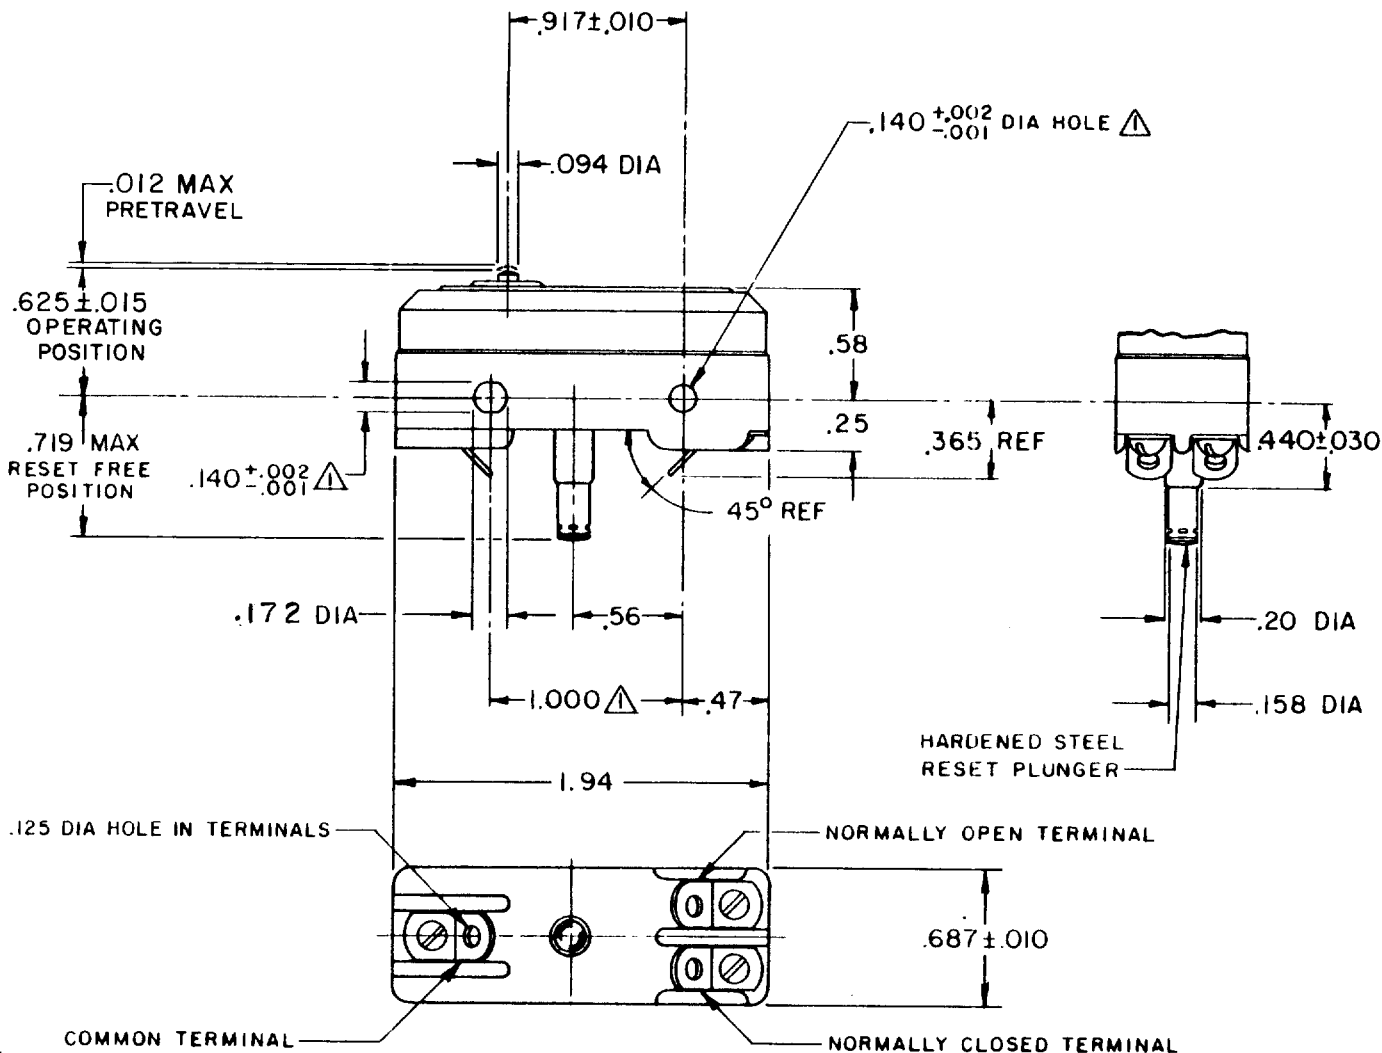

NOTE -
△ MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX DIA ON 1.000 ± .002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE ———— 20-30 OZ OVERTRAVEL ———— .005 MIN	CONTACT ARRANGEMENT SINGLE POLE DOUBLE THROW MAINTAINED CONTACT L144	DO NOT SCALE PRINT UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES TOLERANCES ARE ONE PLACE (.0) ± .030 TWO PLACE (.00) ± .015 THREE PLACE (.000) ± .005 ANGLES ±
RESET CHARACTERISTICS OPERATING FORCE ———— 16 OZ MAX	15A 125, <u>250</u> OR 480 VAC 1/4 HP 125 VAC, 1/2 HP <u>250</u> VAC 1/2A 125 VDC, 1/4A 250 VDC 2A 600 VAC RJ	WEIGHT