

MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
PREEPORT, ILLINOIS

FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

BZ-RX9

BZ-RX9
ISSUE 4

REPLACES

RELEASE NO.

CHECK

REVISIONS

A	CO	16325	GCH	19 JAN 62
B	CO	23088	LEB	24 JUL 67
C	CO	25391	OMW	10 FEB 69
D	CO	77589	MAM	29 MAR 94

CHECK

11 JUNE 62

CHECK


19 JAN 62

M BZ-RX9

DRAWING
NUMBER

ISSUE

88

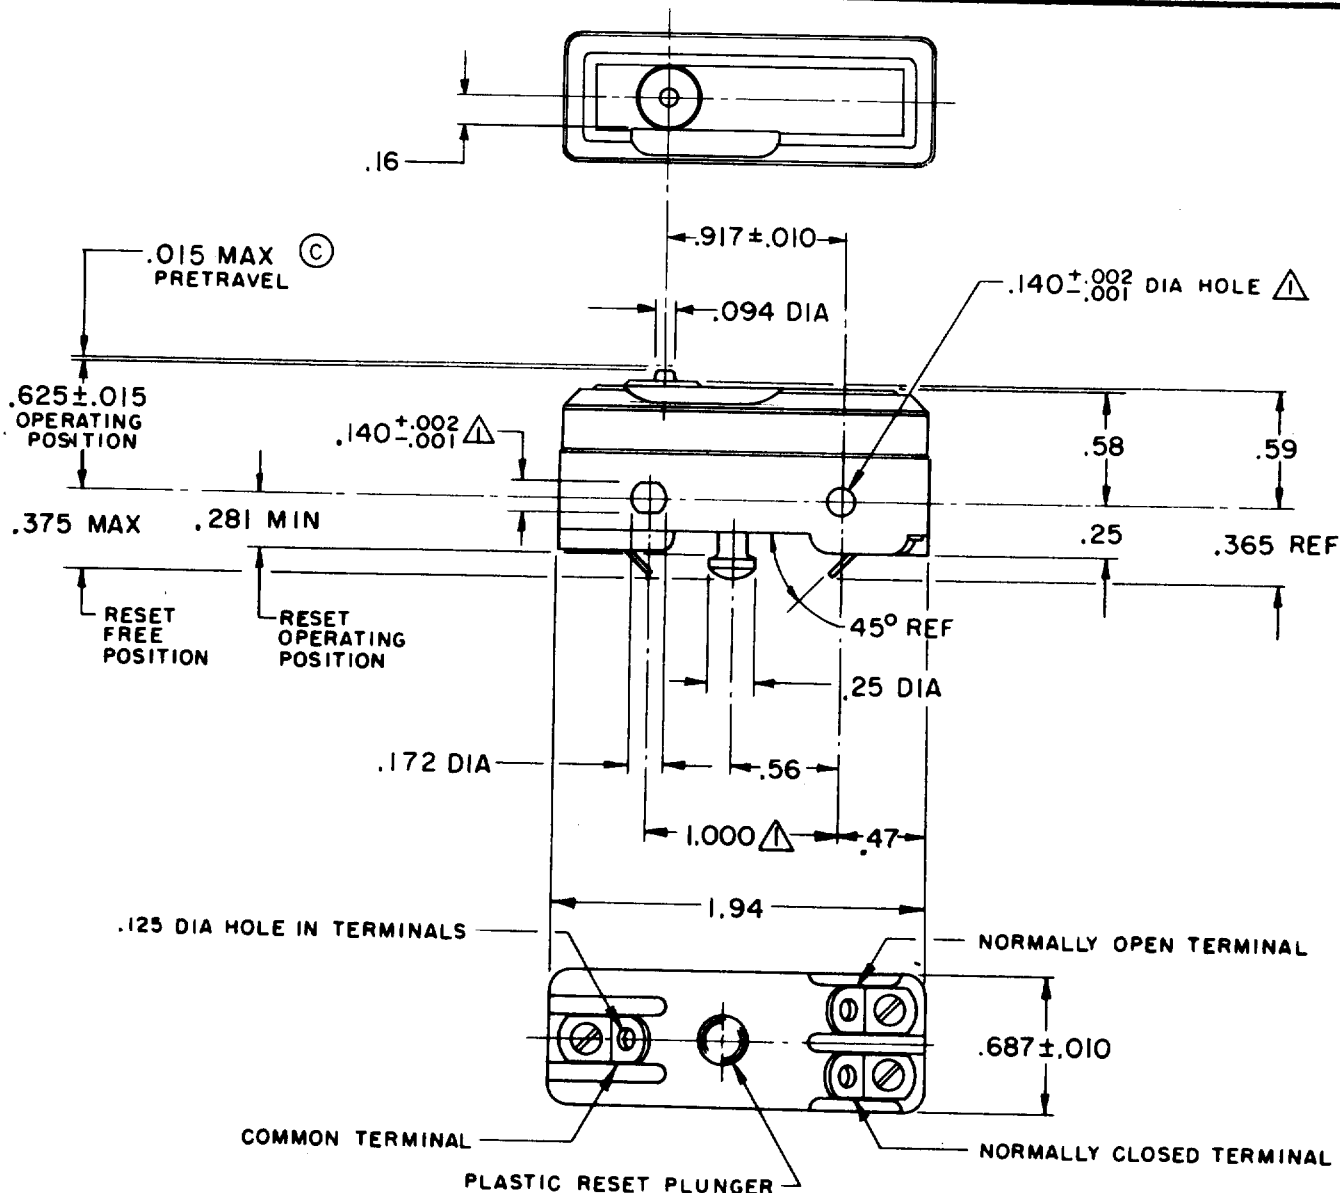

NOTE -

△ - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX DIA ON 1.000 ± .002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE ----- 7-9 OZ
OVERTRAVEL ----- .005 MIN

RESET CHARACTERISTICS

OPERATING FORCE ----- 5-10 OZ
OVERTRAVEL ----- .015 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
SINGLE POLE DOUBLE THROW
MAINTAINED CONTACT

UNDERWRITERS' LAB. INC. LISTED RATING
15 A-125, 250, OR 480 VAC
-L 67- 1/4 HP-125 VAC; 1/2 HP-250 VAC
1/2 A-125 VDC; 1/4 A-250 VDC



SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.018
THREE PLACE	(.000)	±.008
ANGLES		±

WEIGHT