



MICRO SWITCH
FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91829

SWITCH-ENCLOSED

CATALOG LISTING
BZE6-2AN

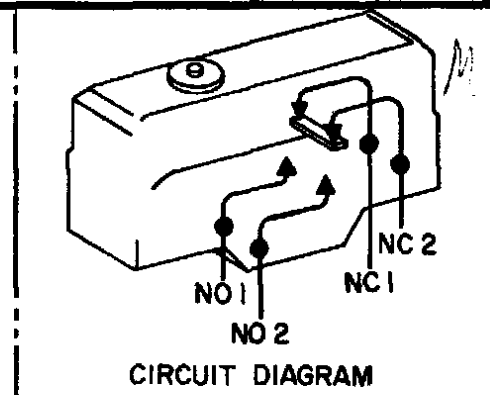


CIRCUIT DIAGRAM

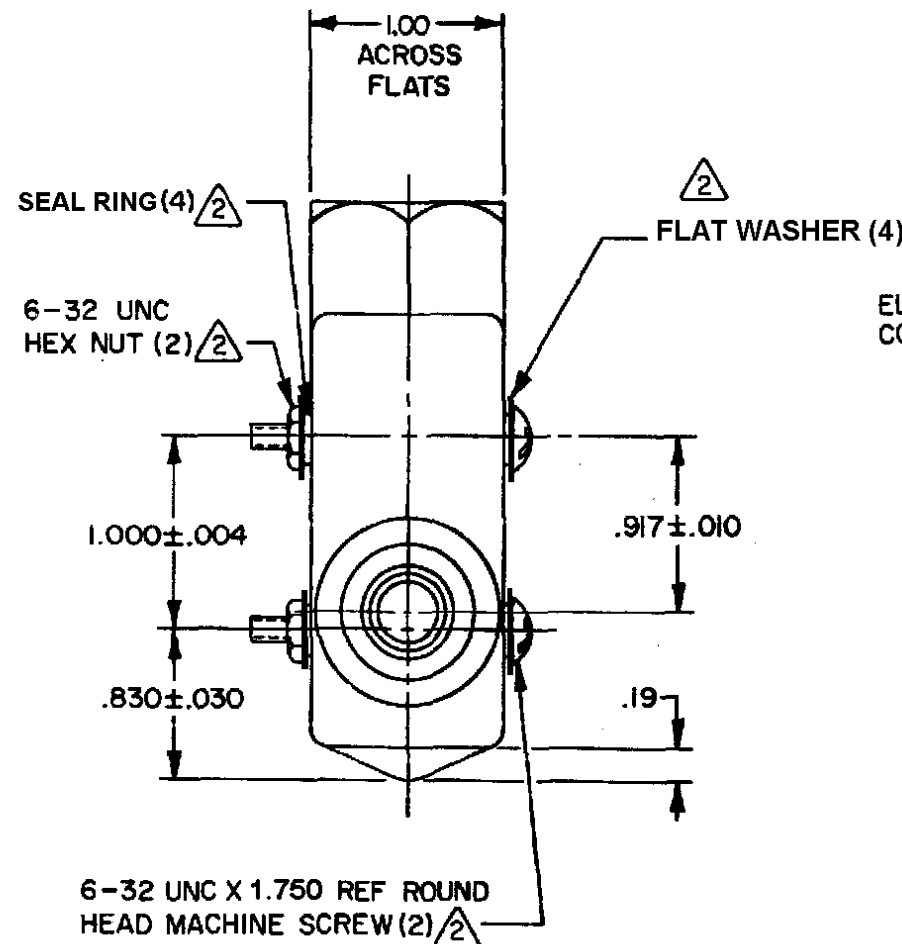

ELASTOMER PLUNGER SEAL SECURED TO COMPONENTS BY EXTERNAL BANDING

HARDENED STEEL PLUNGER

.33 DIA
.47 SPHERICAL R

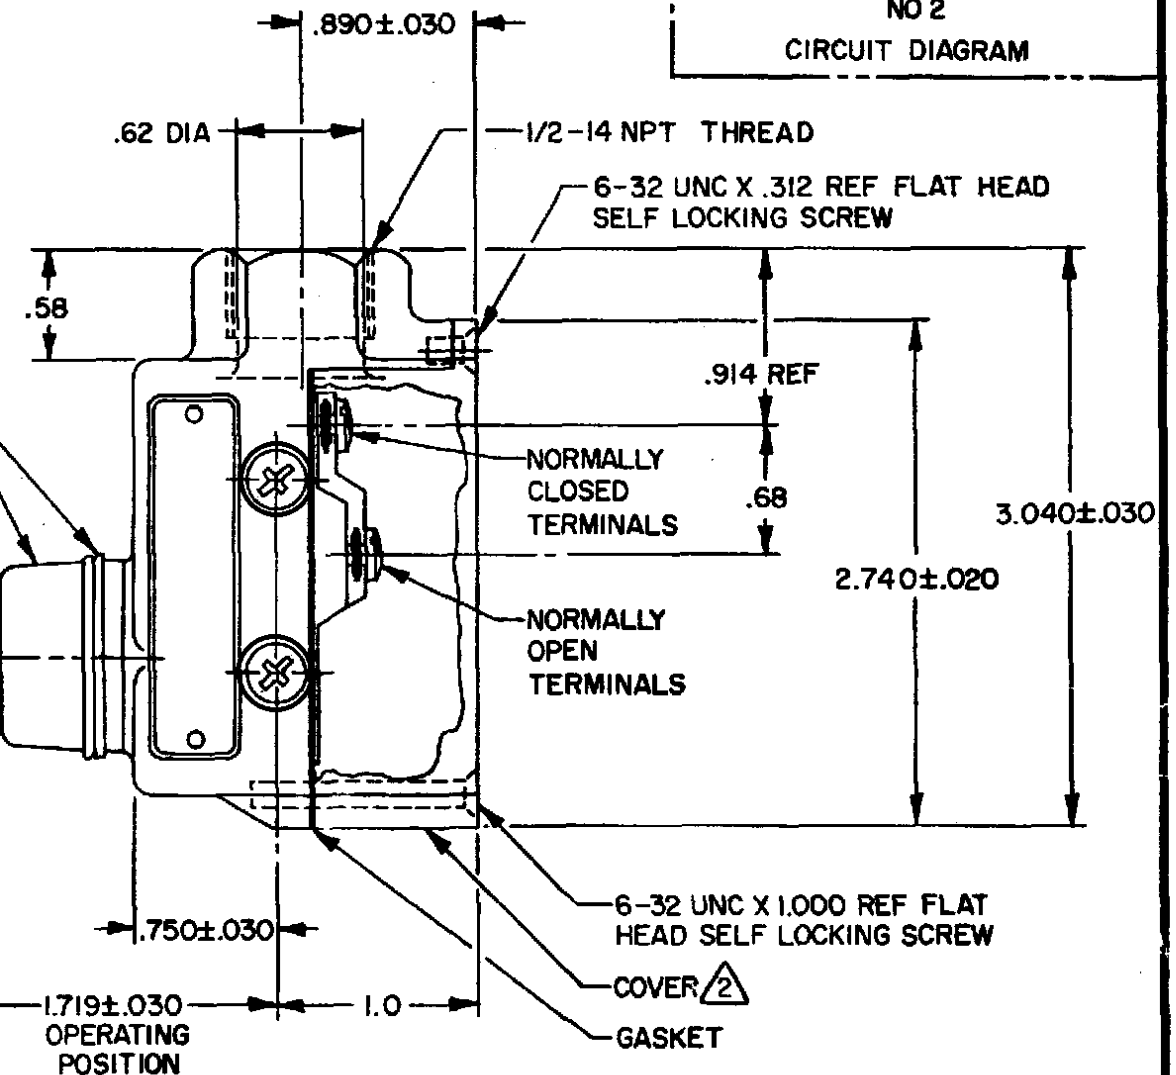

NOTES-

- 1 - 6-32 UNC X .219 REF BINDING HEAD TERMINAL SCREW AND WASHER(SEMS)(4)
- 2 - FURNISHED UNASSEMBLED
- 3 - SUITABLE ONLY FOR APPLICATIONS IMPARTING A RAPID STROKE TO THE SWITCH PLUNGER
- 4 - SEAL RATING: NEMA 1,3,4
IP66

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE ——— 14-35 OZ	CONTACT ARRANGEMENT S P D T DOUBLE BREAK	DO NOT SCALE PRINT
RELEASE FORCE ——— 4 OZ MIN		UNLESS OTHERWISE NOTED
DIFFERENTIAL TRAVEL ——— .004 MAX	15A-125, 250 OR 480 VAC	DIMENSIONS ARE IN INCHES
OVERTRAVEL ——— .219 MIN	1A-125 VDC; 0.5A-250 VDC	TOLERANCES ARE:
BASIC SWITCH REPLACEMENT — BZ-2AQ77T	1/4 HP-125 VAC; 1/2 HP-250 VAC	ONE PLACE (.0) ±.030
	CODE L73	TWO PLACE (.00) ±.015
	CE 1.5A, 240 Vac	THREE PLACE (.000) ±.005
		ANGLES
		WEIGHT .56 LB

BZE6-2AN

M

DRAWING
NUMBER

14

ISSUE

REPLACES

RELEASE NO.

29AUG07

PSR

CHECK

30OCT06

PM

30OCT06

CHECK

21AUG06

DVM

21AUG06

CHECK

26AUG77

BS

29AUG07

MASTER
DRAWN