
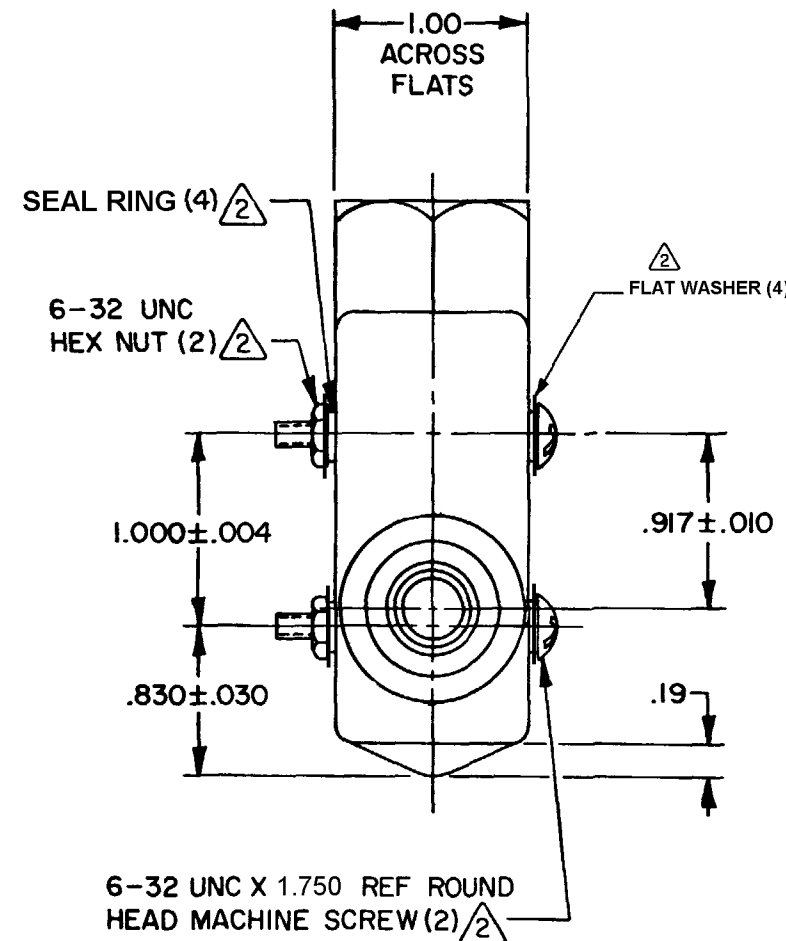


MICRO SWITCH
FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH-ENCLOSED

CATALOG LISTING
BZE6-2AN5

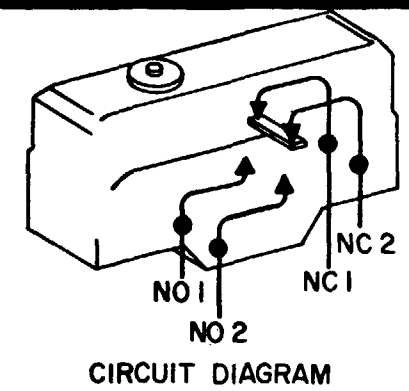


ELASTOMER PLUNGER SEAL SECURED TO COMPONENTS BY EXTERNAL BANDING

HARDENED STEEL PLUNGER

.33 DIA
.47 SPHERICAL R

.078 MAX PRETRAVEL

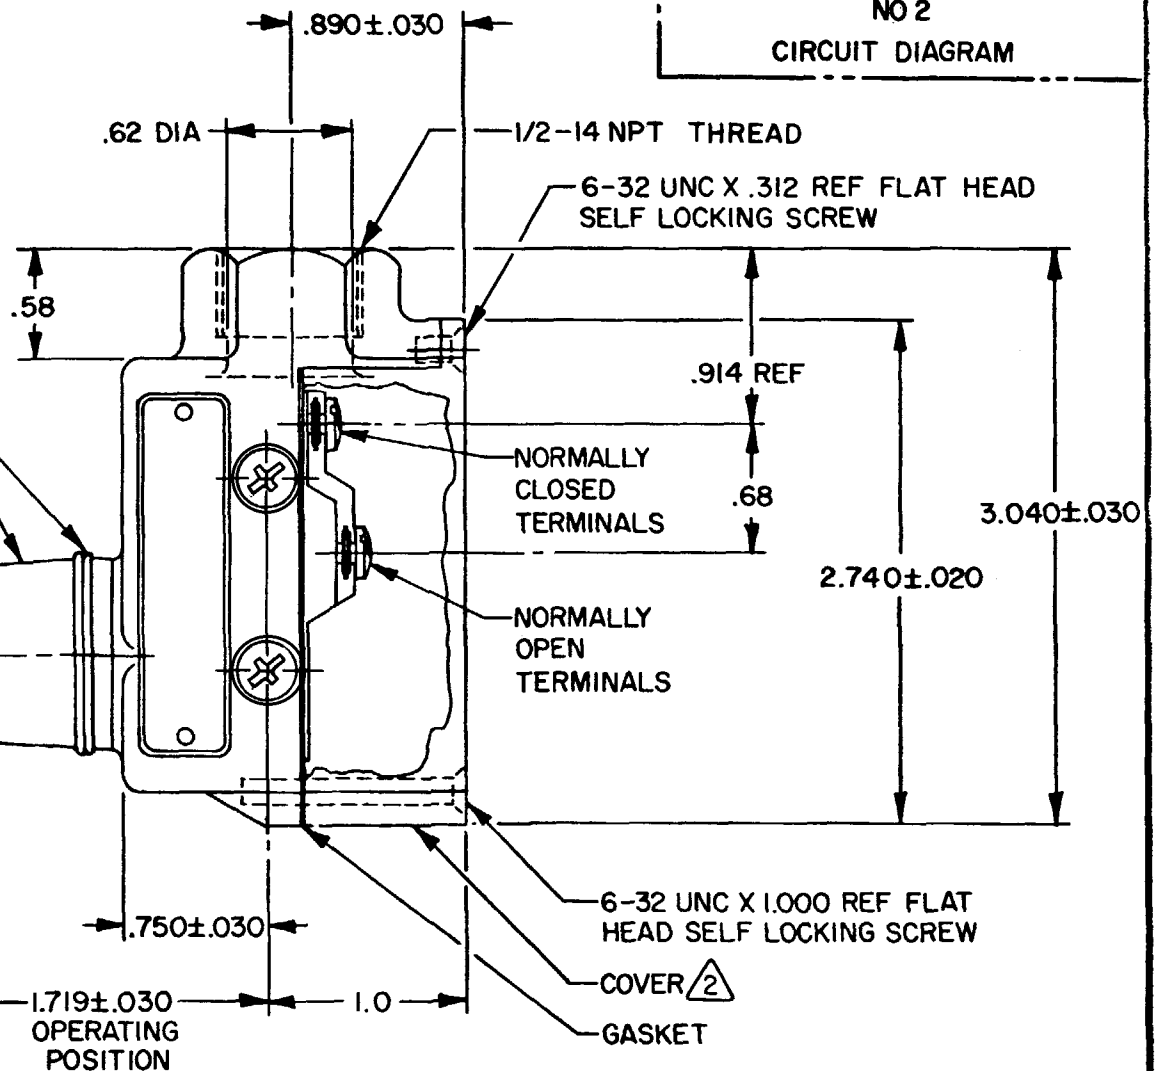

NOTES

- 1 - 6-32 UNC X .219 REF BINDING HEAD TERMINAL SCREW AND WASHER(SEMS)(4)
- 2 - FURNISHED UNASSEMBLED
- 3 - SUITABLE ONLY FOR APPLICATIONS IMPARTING A RAPID STROKE TO THE SWITCH PLUNGER
- 4 - SEAL RATING: NEMA 1,3,4
IP66

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE — — — — 20-53 OZ	CONTACT ARRANGEMENT S P D T DOUBLE BREAK	DO NOT SCALE PRINT
RELEASE FORCE — — — — 10 OZ MIN		UNLESS OTHERWISE NOTED
DIFFERENTIAL TRAVEL — — — .004 MAX	15A-125, <u>250</u> OR 480 VAC	DIMENSIONS ARE IN INCHES
OVERTRAVEL — — — — .219 MIN	1A-125 VDC; 0.5A-250 VDC	TOLERANCES ARE:
BASIC SWITCH REPLACEMENT — — BZ -2AQ77T	1/4 HP-125 VAC; 1/2 HP- <u>250</u> VAC	ONE PLACE (.01) ±.030
	CODE L73	TWO PLACE (.00) ±.015
	CE 1.5A, 240 Vac	THREE PLACE (.000) ±.005
		ANGLES ±
		WEIGHT .56 LB

CATALOG LISTING
BZE6-2AN5
PAGE 1 OF 1
ISSUE 12
DRAWING NUMBER
29AUG07
PSR
CHECK
30OCT06
PM
CHECK
21AUG06
DVM
CHECK
8JAN
S L B 30 JAN
RASTER
FO-52851-A
DRAWN