

MICRO SWITCH
FREEPORT, ILLINOIS, U.S.A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91928

SWITCH-ENCLOSED

CATALOG LISTING
BZE 6-2AQ

BZE 6-2AQ

M

DRAWING
NUMBER

12

12

ISSUE

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

REPLACES

PR-7336

29AUG07

PSR

CHECK

10 NOV 05

RJ

CHECK

11 MAR 85

2 SEP 77




4 SEP 92

10 NOV 05

29AUG07

RASTER
DRAWN

J A L 30 AUG 77

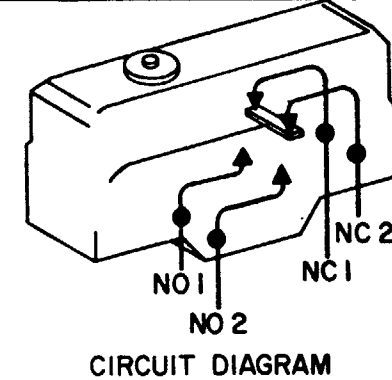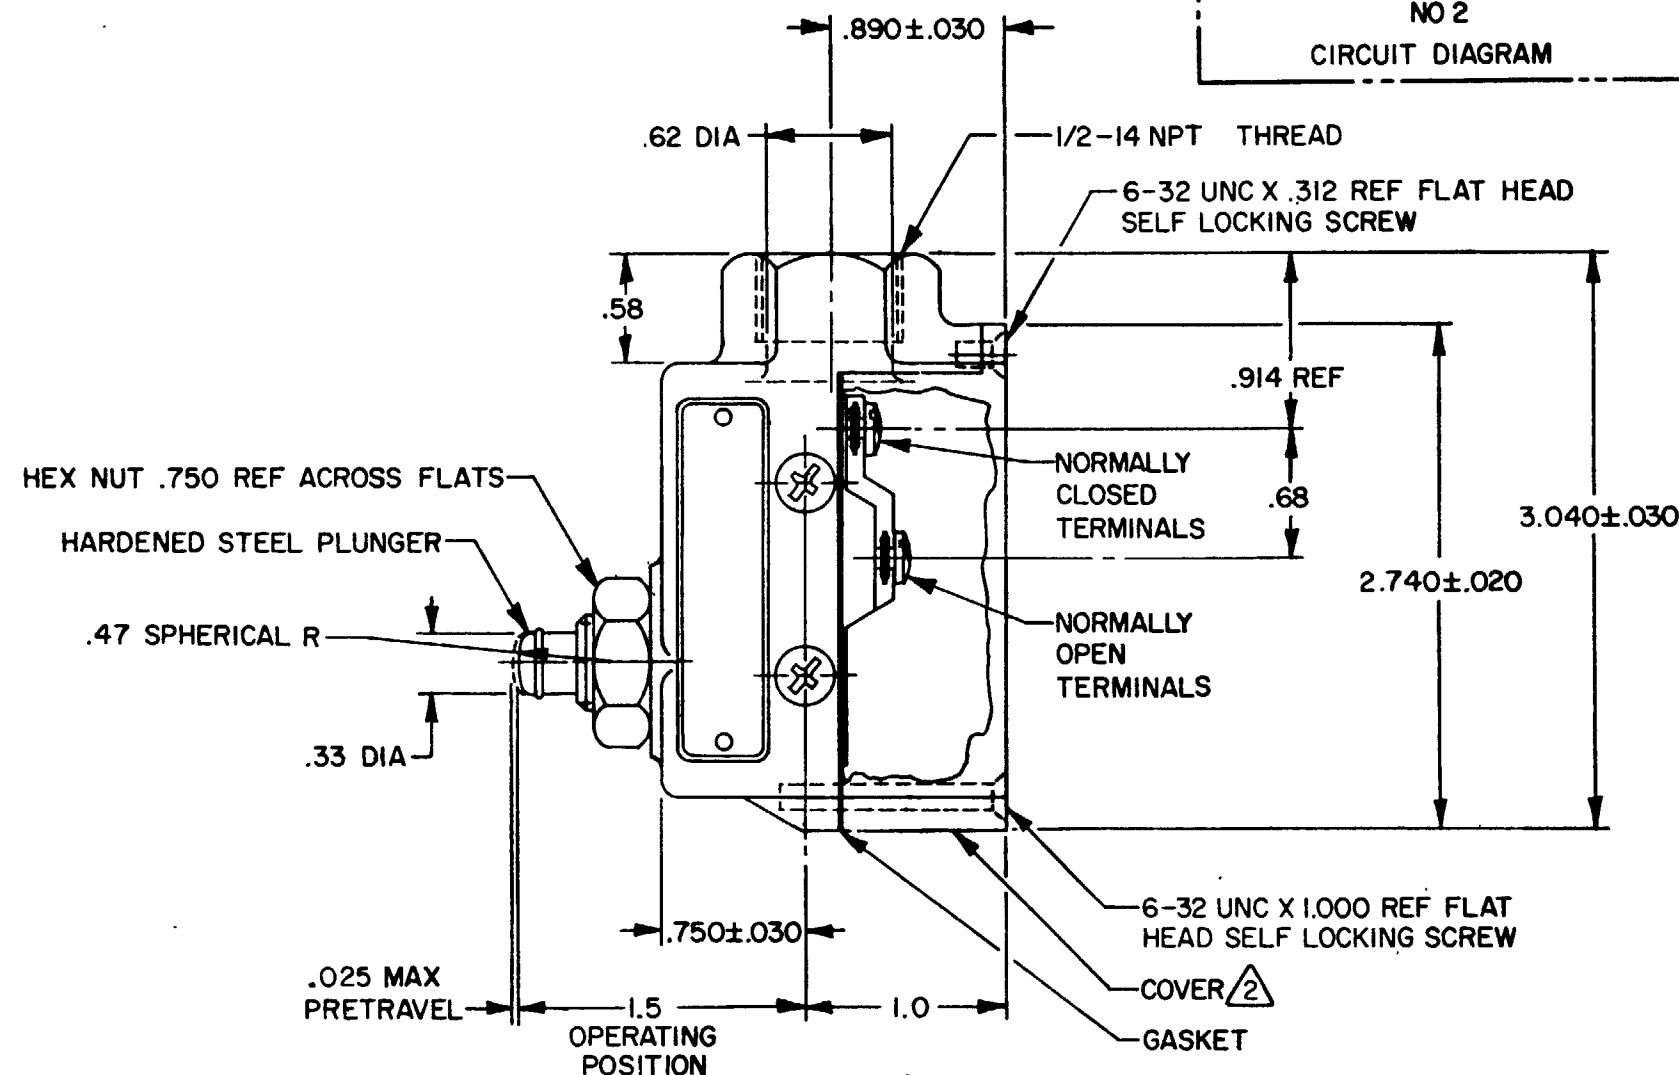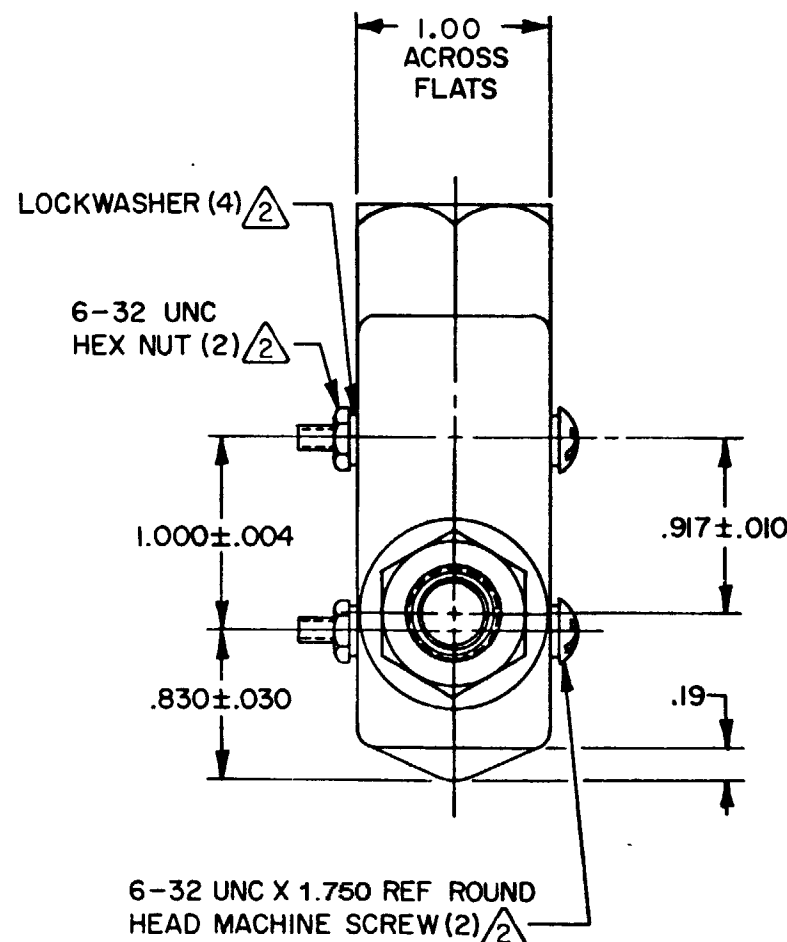

NOTES-

- 1 - 6-32 UNC X .219 REF BINDING HEAD TERMINAL SCREW AND WASHER (SEMS) (4)
- 2 - FURNISHED UNASSEMBLED
- 3 - SUITABLE ONLY FOR APPLICATIONS IMPARTING A RAPID STROKE TO THE SWITCH PLUNGER
- 4 - SEAL RATING: NEMA1
IP40

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE - - - - - 14-24 OZ	CONTACT ARRANGEMENT S P D T DOUBLE BREAK	DO NOT SCALE PRINT
RELEASE FORCE - - - - - 4 OZ MIN		UNLESS OTHERWISE NOTED
DIFFERENTIAL TRAVEL - - - - .005 MAX	CODE L73 15A-125, 250 OR 480 VAC 1A-125 VDC; 0.5A-250 VDC 1/4HP-125 VAC; 1/2HP-250 VAC	DIMENSIONS ARE IN INCHES
OVERTRAVEL - - - - - .219 MIN		TOLERANCES ARE:
BASIC SWITCH REPLACEMENT - - - BZ-2AQ66T	CE 1.5A, 240 Vac	ONE PLACE (.0) ±.030 TWO PLACE (.00) ±.015 THREE PLACE (.000) ±.005 ANGLES ±
		WEIGHT