

MICRO SWITCH
FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH-ENCLOSED

CATALOG LISTING
BZE6-2AQ8T

BZE6-2AQ8T

M

DRAWING
NUMBER

9

8

ISSUE

8

REPLACES

RELEASE NO.

29AUG07

PSR

8

check

10 NOV 05

check

10 NOV 05

check

13 APR 84

check

8 NOV 84

check

26 FEB 85

check

4 SEP 92

check

10 NOV 05

check

24 AUG 77

check




24 AUG 77

check

24 AUG 77

check

MASTER
DRAWN

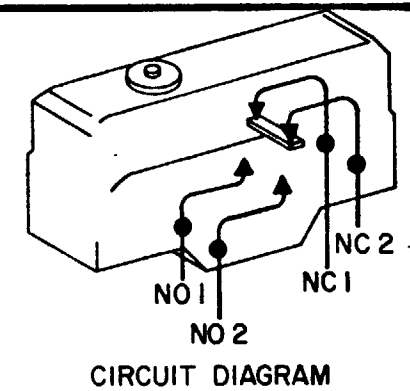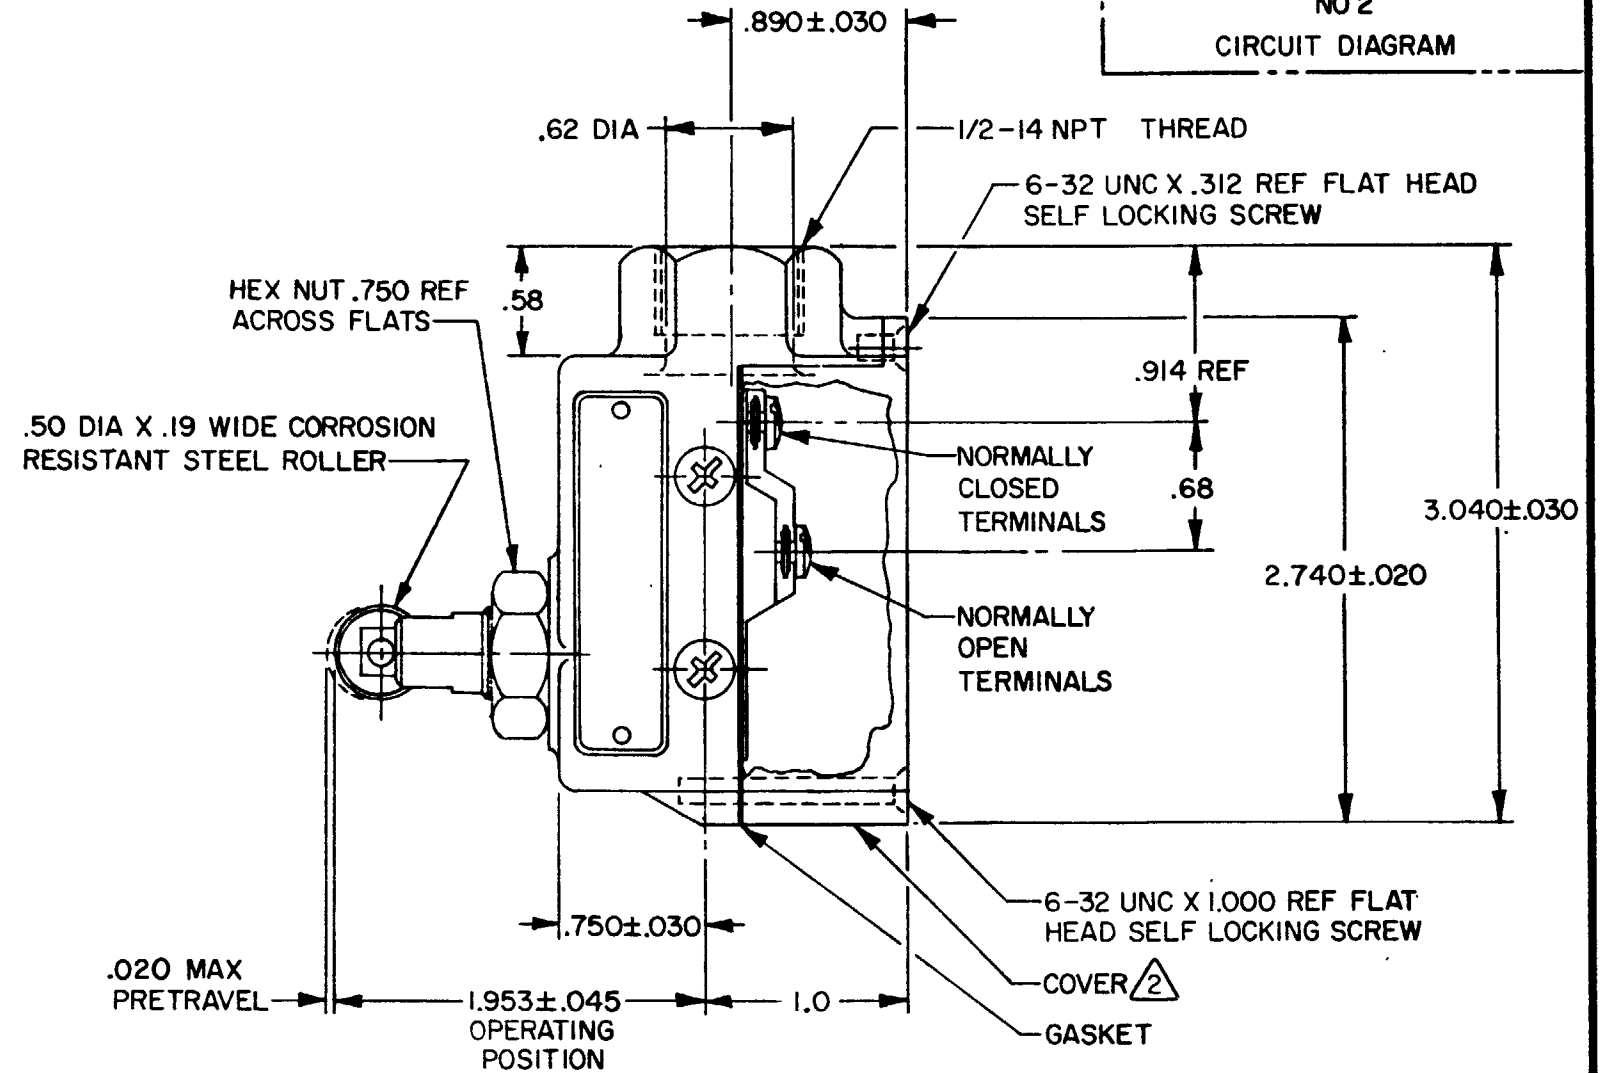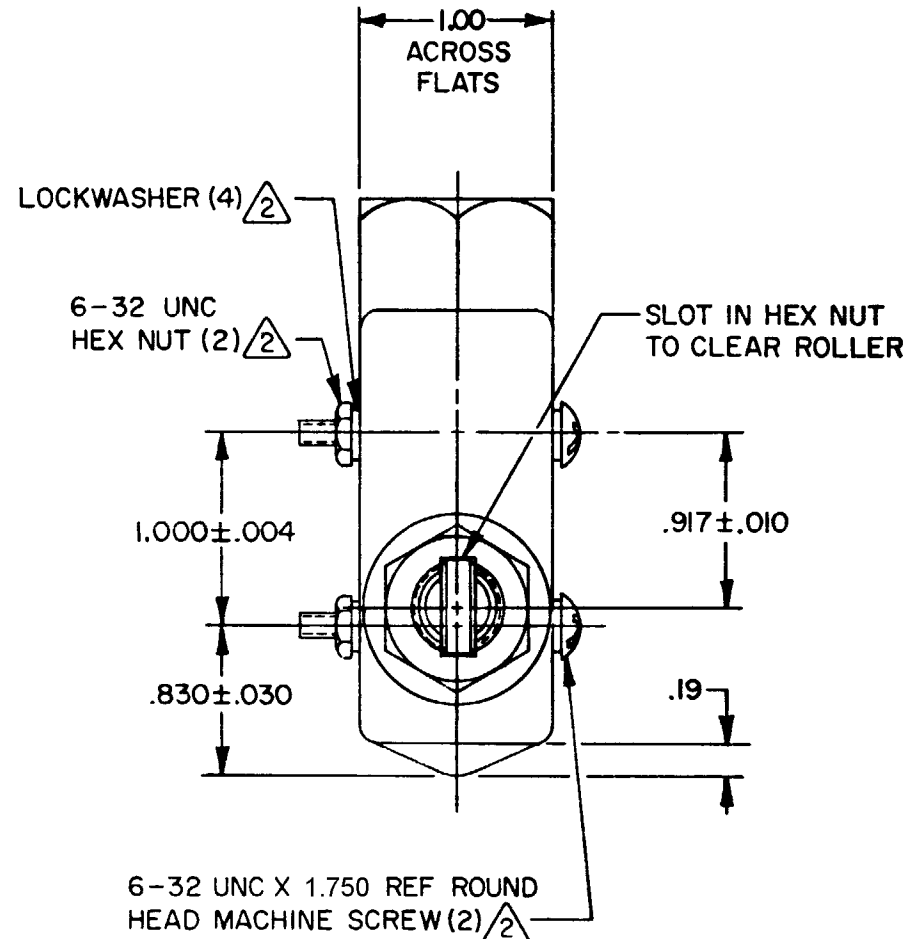

NOTES -

- 1 - 6-32 UNC X .219 REF BINDING HEAD TERMINAL SCREW AND WASHER (SEMS)(4)
- $\triangle 2$ - FURNISHED UNASSEMBLED
- 3 - SUITABLE ONLY FOR APPLICATIONS IMPARTING A RAPID STROKE TO THE SWITCH PLUNGER
- 4 - SEAL RATING: NEMA1
IP40

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE — 14-24 OZ

RELEASE FORCE — 4 OZ MIN

DIFFERENTIAL TRAVEL — .004 MAX

OVERTRAVEL — .140 MIN

BASIC SWITCH REPLACEMENT — BZ-2AQ784T

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T DOUBLE BREAK

15A-125, 250 OR 480 VAC
1A-125 VDC; 0.5A-250 VDC
1/4 HP-125 VAC; 1/2 HP-250 VAC
CODE L73

CE 1.5A, 240 Vac



SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
NOTED
DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE (.0) $\pm .030$
TWO PLACE (.00) $\pm .015$
THREE PLACE (.000) $\pm .005$
ANGLES $\pm .005$

WEIGHT