

CATALOG LISTING

BZE6-2RN-C

ISSUE

5

PSR

29AUG07

RELEASE NO.

PR-23063

REPLACES

REVISIONS

A 0017057

VKR

22NOV05

B 0023923

RKP

23AUG06

C 0025947

KNS

30OCT06

D 0033014

BS

29AUG07

CHECK

23AUG06

DVM

CHECK

8 JAN 98

GLH

CHECK

8 JAN 98

GLH


RASTER

DRAWN

MICRO SWITCH
a Honeywell Division
FED. MFG. CODE 91929

SWITCH – ENCLOSED

CATALOG LISTING
BZE6-2RN-C

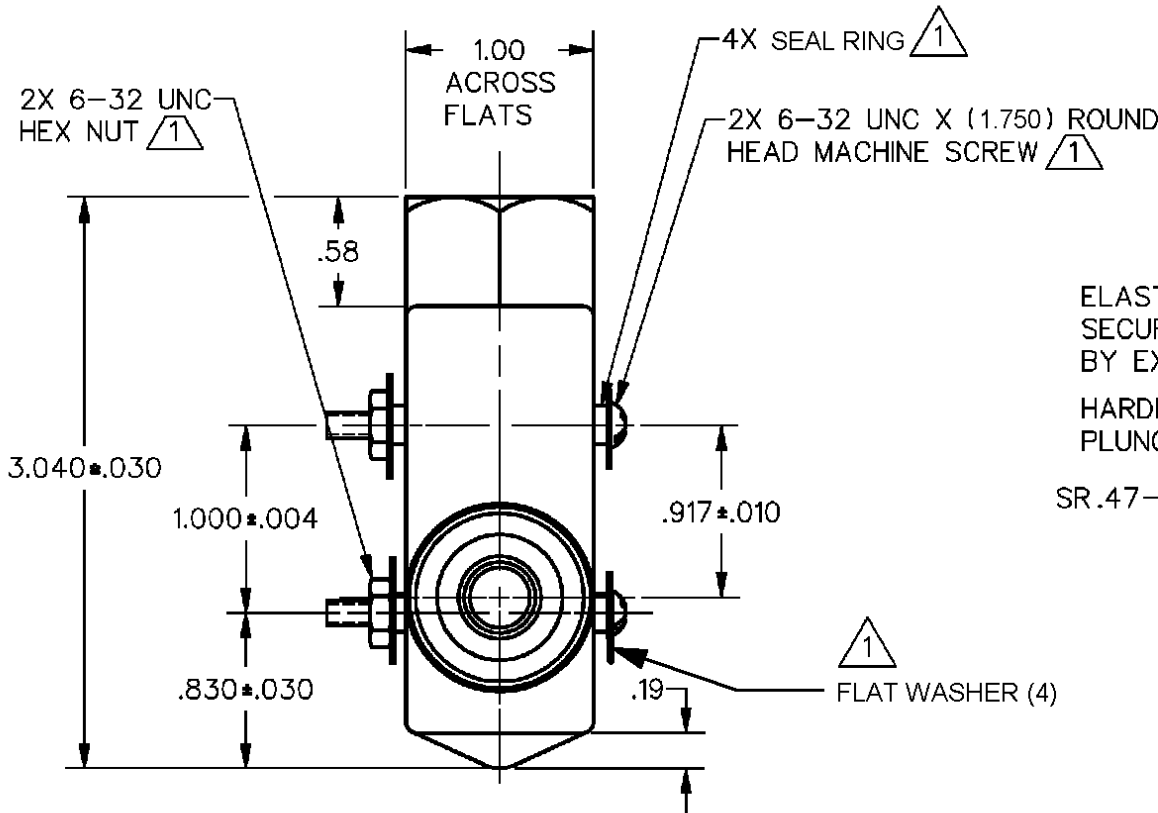


NOTE

¹ FURNISHED UNASSEMBLED

2 - 3X 6-32 UNC X (.219) BINDING HEAD TERMINAL SCREW AND CUPWASHER

3 - SEAL RATING: NEMA1,3,4
IP66

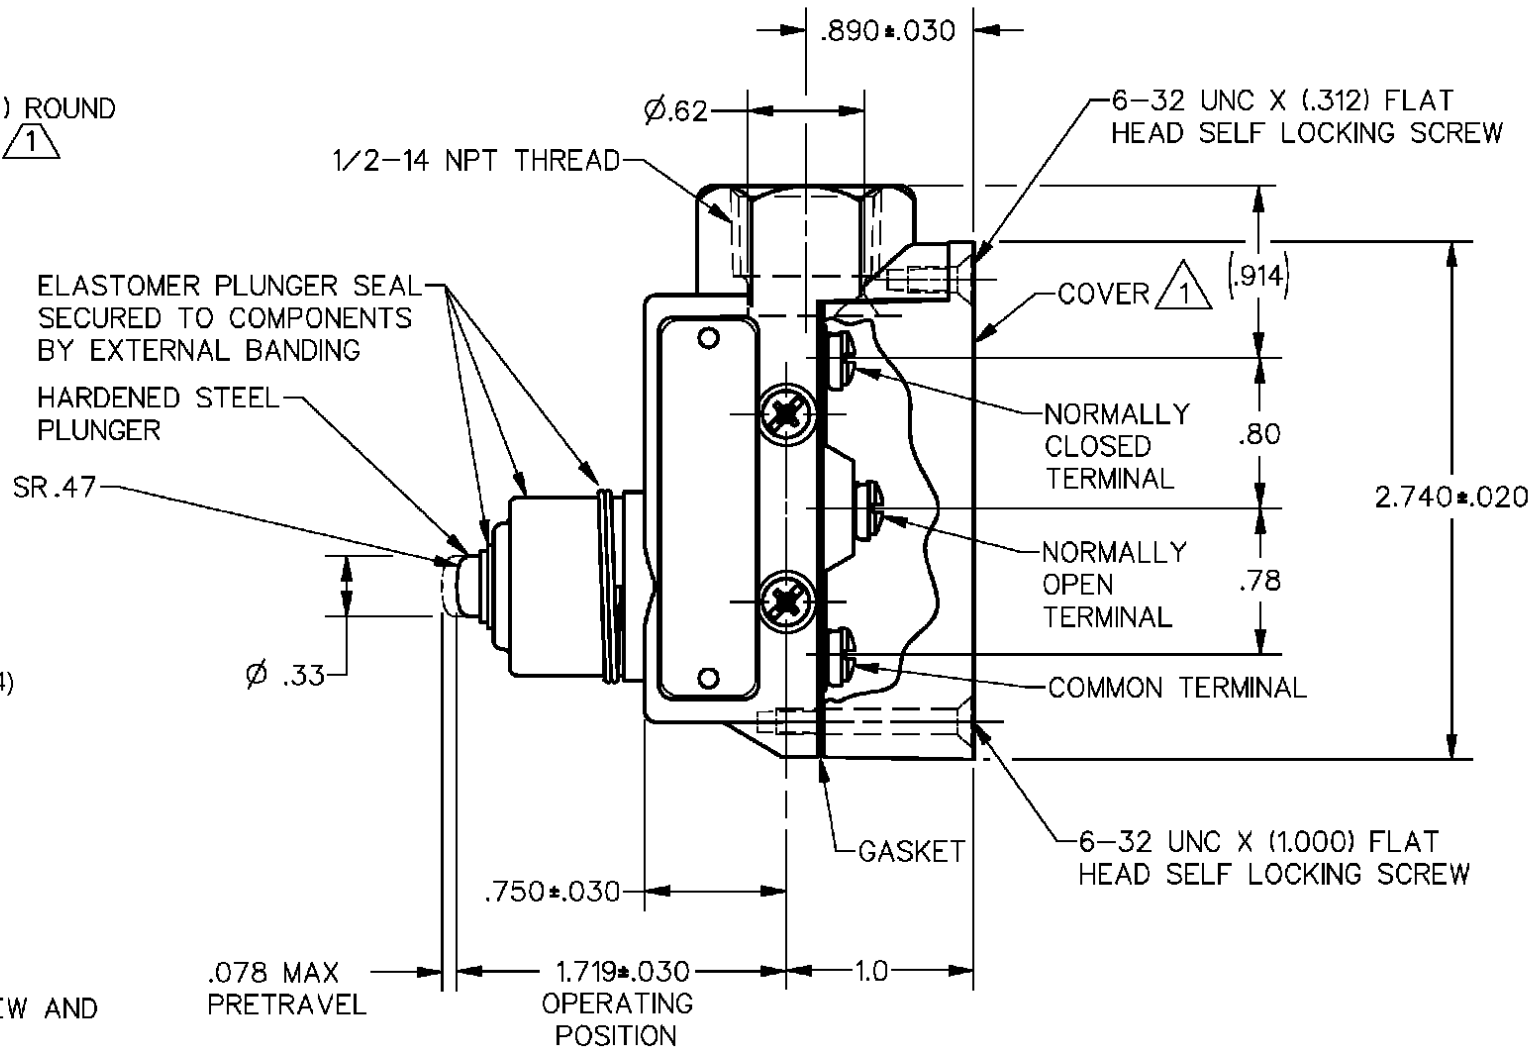

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH		THIRD ANGLE PROJECTION
CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE ——— 9-24 OZ	CONTACT ARRANGEMENT	DO NOT SCALE PRINT
RELEASE FORCE ——— 4 OZ MIN	S P D T	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
DIFFERENTIAL TRAVEL ——— .002 MAX	L74 15A 125, 250 OR 480 VAC	ONE PLACE (.01) ±.030
OVERTRAVEL ——— .219 MIN	2A 600 VAC	TWO PLACE (.00) ±.015
BASIC SWITCH REPLACEMENT ——— BZ-2RQ77	1/8HP 125 VAC, 1/4HP 250 VAC	THREE PLACE (.000) ±.005
	1/2A 125 VDC, 1/4A 250 VDC	ANGLES ±
	CE 1.5A, 240Vac	WEIGHT .56 LB

ANSI Y14.5M-1982 APPLIES