

BZE6-2RN18-C3

M

DRAWING NUMBER

7

ISSUE

8

REPLACES

PR-19438

CHECK

29AUG07

PSR

22AUG06

DVM

23NOV05

BP

23NOV05

BS

29AUG07

RASTER DRAWN

SA

V

17

OCT


91

CHECK

MICRO SWITCH
a Honeywell Division
FED. MFG. CODE 91928

SWITCH - ENCLOSED

CATALOG LISTING
BZE6-2RN18-C3

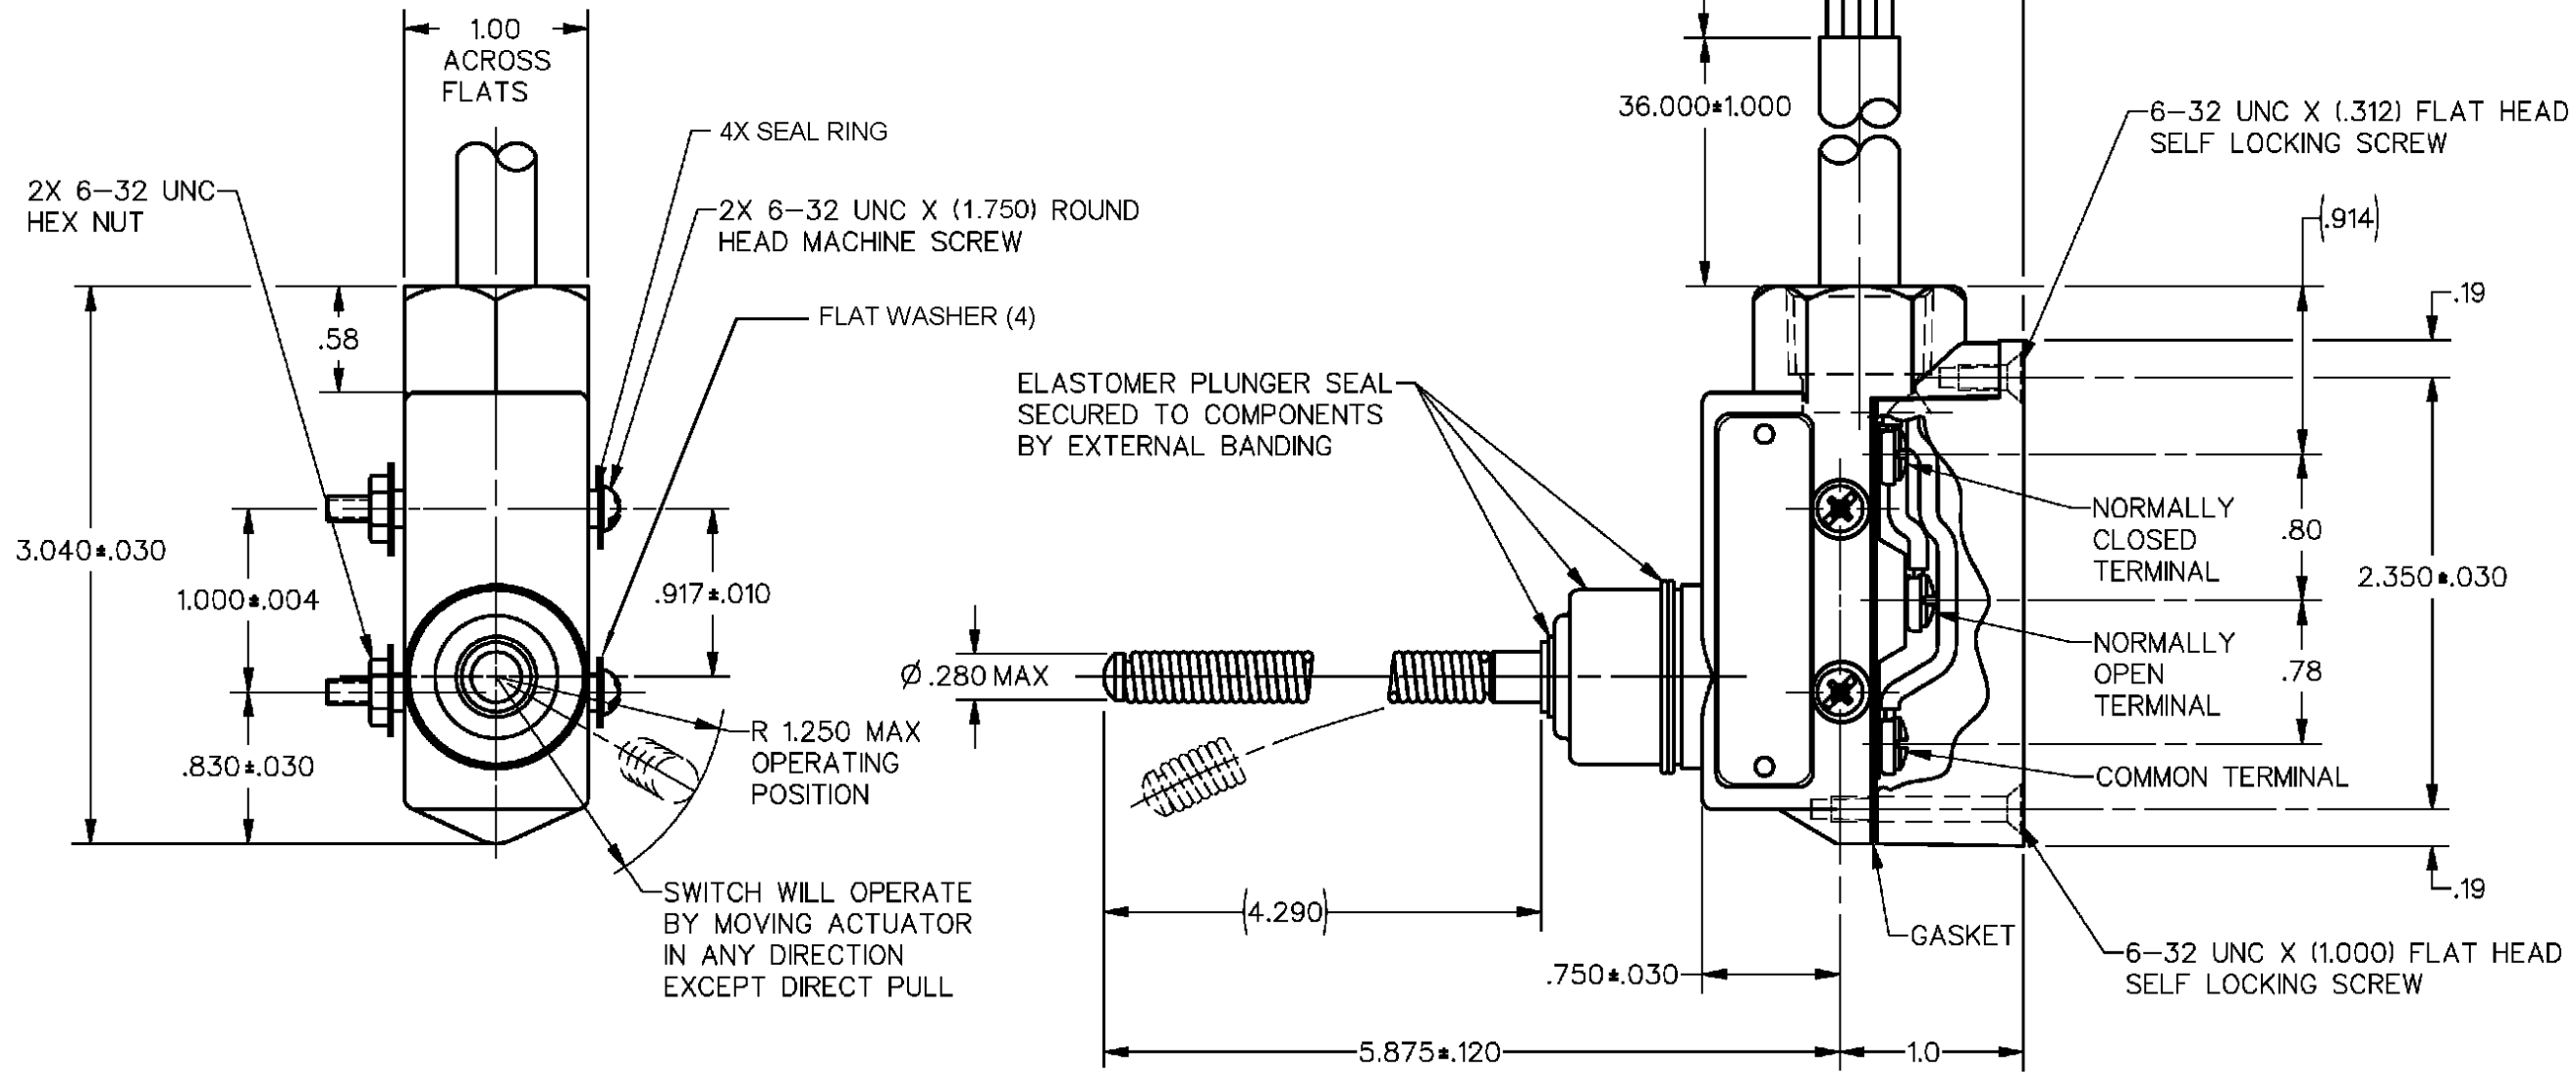

NOTE
1 - CONDUIT OPENING ONLY POTTED
2 - SEAL RATING: NEMA 1,3,4
IP66

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

CHARACTERISTICS

OPERATING FORCE — — — — — 7 OZ MAX

OPERATING POSITION — — — — — 15° MAX

SWITCH - BASIC REPLACEMENT ---BZ-2R-A2


ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L270 10A 125, 250 OR 480 VAC
2A 600 VAC
1/8HP 125 VAC, 1/4HP 250 VAC
1/2A 125 VDC, 1/4A 250 VDC

CE 1.5A, 240 Vac

THIRD ANGLE PROJECTION	
SCALE	FULL
DO NOT SCALE PRINT	
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
ONE PLACE	(.0) ±.030
TWO PLACE	(.00) ±.015
THREE PLACE	(.000) ±.005
ANGLES	±
WEIGHT	

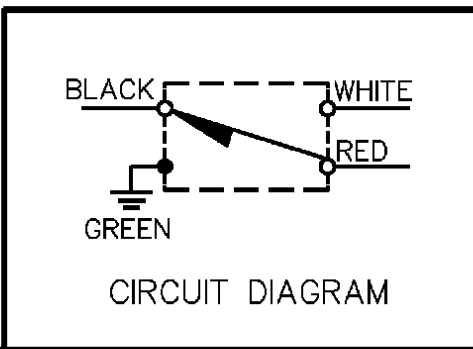

ANSI Y14.5M-1982 APPLIES